

General Description


The DM9801 is a physical-layer, single-chip, low-power transceiver for 1M Home Phoneline Network applications. On the media side, it provides an interface to a Home Phoneline wiring system. The reconciliation layer interfaces to the DM9801 either through an IEEE802.3u subset Media Independent Interface (MII) or a pseudo-standard General Purpose Serial Interface (GPSI). A management interface is provided by MDIO/MDC when operating in MII mode, or a Serial Peripheral Interface bus when operating in GPSI mode.

The DM9801 uses a low-power and high-performance CMOS process. It contains the entire physical layer functions of 1M as defined by Home Phoneline Network Alliance, Rev. 1.1, including the Physical Coding Sublayer, (RLL25) Encoder/Decoder (ENC/DEC), 4-wire HN Driver circuit and receiver analog front end (AFE).

Patent Circuitry Includes:

An enhanced 4-wire Home Network transceiver circuit.

Block Diagram

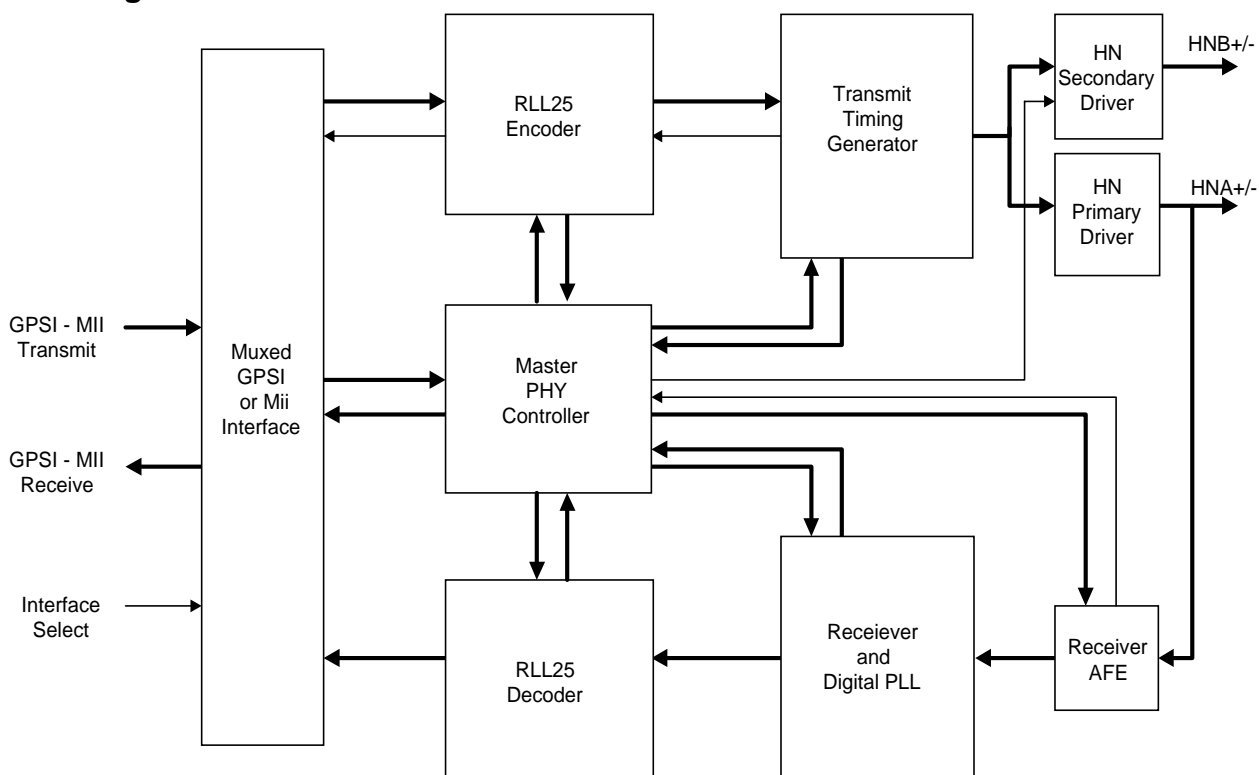

**Features**


- 1M Home Phoneline Network physical-layer, single-chip transceiver
- Supports the MII including the MDIO/MDC serial management interface
- Supports the GPSP including a SPI serial management interface
- Supports Link Integrity function
- Smart equalizer circuit for 1M receiver
- Supports Patent 4-wire operation
- Supports hardware or software speed select
- Supports Interrupt on change, eliminates management polling
- Flexible built-in LED support for TX Activity, RX Activity and Collision Indication or Activity, Link state and Collision
- Digital PLL circuit using advanced digital algorithm to reduce jitter
- Low-power, high-performance CMOS process
- Available in a small outline 100-pin LQFP
- 3.3V DC power with 5V DC tolerant I/O



DM9801

1M Home Phoneline Network Physical Layer Single Chip Transceiver

Pin Configuration: DM9801, 100-pin LQFP

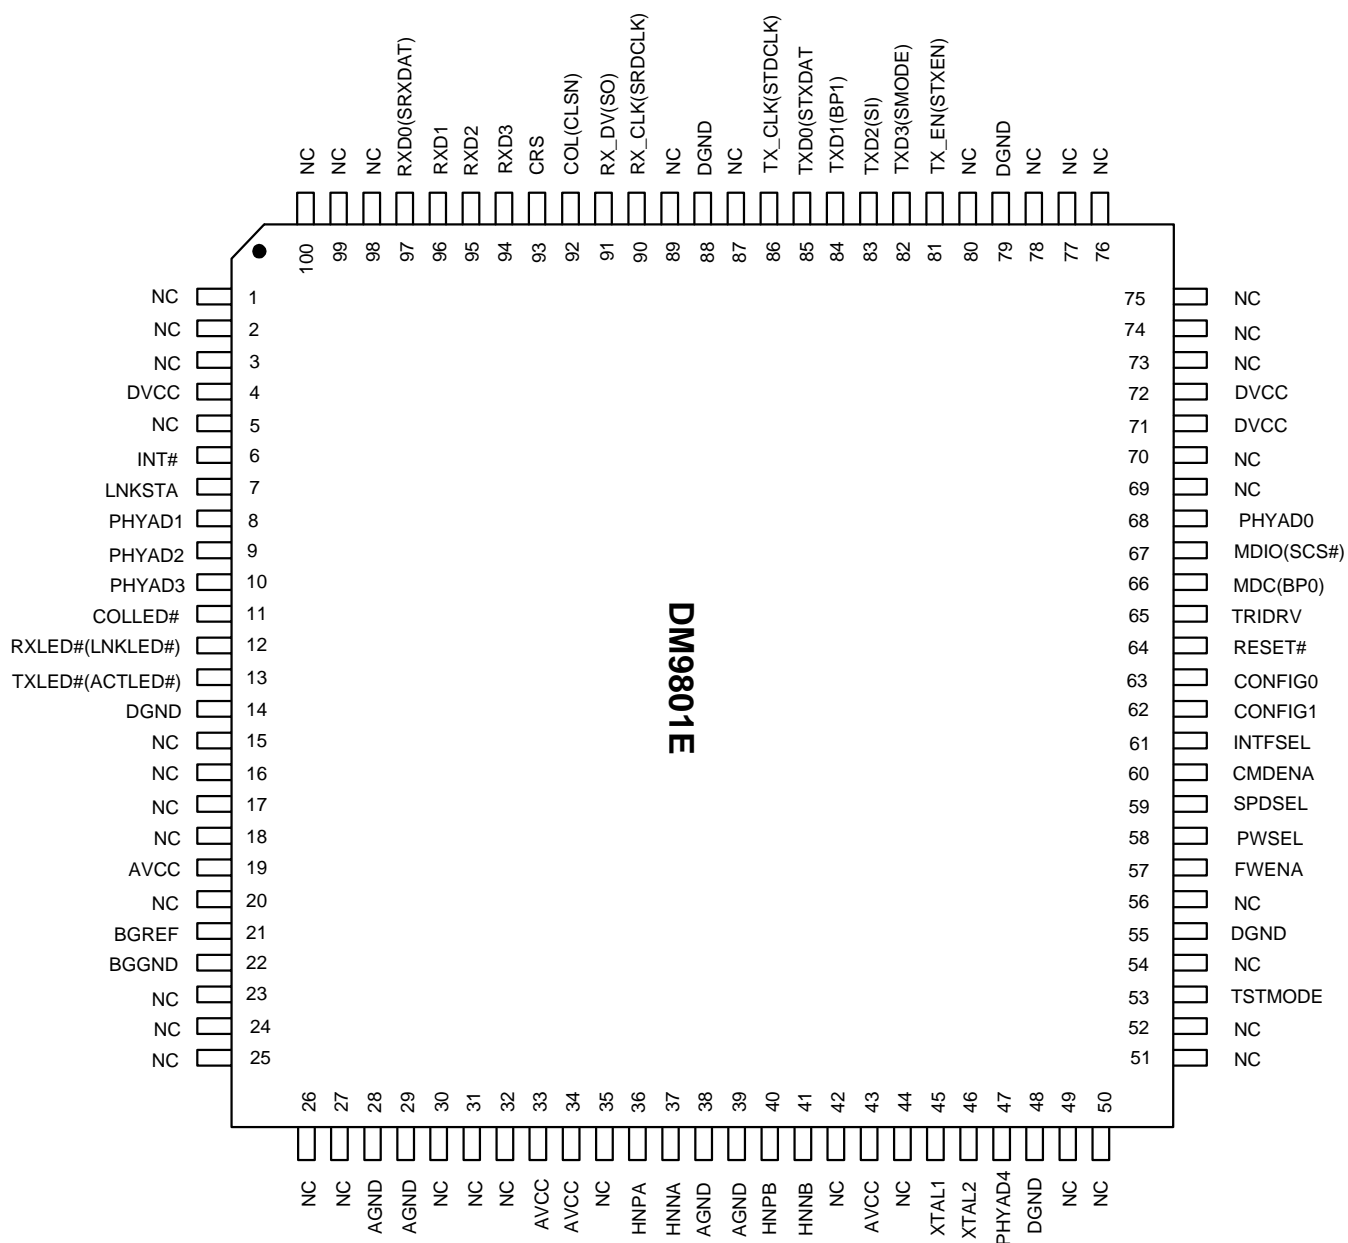

Pin Description

| Pin No. | Pin Name | I/O | Description |
|--|------------------------|-----|---|
| Station Interface: Receive Data, Transmit Data and Management | | | |
| 85 | TXD0 or STXDAT | I | Transmit Data Bit 0 (MII Mode, INTFSEL = 0): Transmit data input pin, bit 0, for nibble data from the MII Serial Transmit Data Bit (GPSI Mode, INTFSEL = 1): Transmit data input pin for serial data from the GPSI. |
| 84 | TXD1 or BP1 | I | Transmit Data Bit 1 (MII Mode, INTFSEL = 0): Transmit data input pin, bit 1, for nibble data from the MII SPROM Boot Page Select 1 (GPSI Mode, INTFSEL = 1): Most significant bit of a 2-bit encoded select. The BP1 and BP0 inputs, select one of four, 64-byte, SPROM pages to initialize the DM9801 management registers. Master mode must be selected using the SMODE input. |
| 83 | TXD2 or SI | I | Transmit Data Bit 2 (MII Mode, INTFSEL = 0): Transmit data input pin, bit 2, for nibble data from the MII Serial Data Input (GPSI Mode, INTFSEL = 1): This is the serial data input pin to the DM9801 for the SPI bus. The SPI bus operation is only valid if GPSI mode is selected. |
| 82 | TXD3 or SMODE | I | Transmit Data Bit 3 (MII Mode, INTFSEL = 0): Transmit data input pin, bit 3, for nibble data from the MII Serial Mode Select (GPSI Mode, INTFSEL = 1): This input pin selects the SPI buses mode of operation. The SPI bus modes of operation are: Master Mode (SMODE = 0) Slave Mode (SMODE = 1) The SPI bus operation is only valid if GPSI mode is selected. |
| 86 | TX_CLK or STDCLK | O,Z | MII Transmit Clock (MII Mode, INTFSEL = 0): TX_CLK is an output pin from the DM9801. Used as the transmit data reference clock, to clock in nibble data from the MII when in MII interface mode. Serial Transmit Data Clock (GPSI Mode, INTFSEL = 1): STDCLK is an output from the DM9801. Used as the transmit reference clock to clock in the STXDATA when in GPSI interface mode. |
| 81 | TX_EN or STXEN | I | MII Transmit Enable (MII Mode, INTFSEL = 0): MII Transmit enable input, used to enable the transmit function of the MII when in MII interface mode. Serial Transmit Enable (GPSI Mode, INTFSEL = 1): Used to enable the transmit function of the GPSI when in GPSI interface mode. |
| 66 | MDC or BP0 | I | MII Serial Management Clock (MII Mode, INTFSEL = 0): Synchronous clock to the MDIO management data input/output serial interface which is asynchronous to transmit and receive clocks. The maximum clock rate is 2.5MHz. SPROM Boot Page Select 0 (GPSI Mode, INTFSEL = 1): Least significant bit of a 2-bit encoded select. The BP1 and BP0 inputs, select one of four, 64-byte, SPROM pages to initialize the DM9801 management registers. Master mode must be selected using the SMODE input. |



Pin Description (Continued)

| Pin No. | Pin Name | I/O | Description |
|--|------------------------|-------|--|
| Station Interface: Receive Data, Transmit Data and Management (Continued) | | | |
| 67 | MDIO Or SCS# | I/O,Z | MII Serial Management Data (MII Mode, INTFSEL = 0): Bi-directional management instruction/data signal that may be driven by the station management entity or the PHY. This pin requires a 1.5KΩ pull-up resistor. Serial Interface Chip Select (GPSI Mode, INTFSEL = 1): SCS# is a bi-directional management chip select signal that may be driven by the station management entity or the PHY. (Active low) |
| 97 | RXD0 Or SRXDAT | O,Z | Receive Data Bit 0 (MII Mode, INTFSEL = 0): Receive data output pin, bit 0, for nibble data to the MII Serial Receive Data Bit (GPSI Mode, INTFSEL = 1): Receive data output pin for serial data to the GPSI. |
| 96 | RXD1 | O,Z | Receive Data Bit 1: Receive data output pin, bit 1, for nibble data to the |
| 95 | RXD2 | O,Z | Receive Data Bit 2: Receive data output pin, bit 2, for nibble data to the MII |
| 94 | RXD3 | O,Z | Receive Data Bit 3: Receive data output pin, bit 3, for nibble data to the MII |
| 90 | RX_CLK Or SRDCLK | O,Z | MII Receive Clock (MII Mode, INTFSEL = 0): RX_CLK is an output pin from the DM9801. Used as the receive data reference clock, to clock out nibble data from the MII when in MII interface mode. Serial Receive Data Clock (GPSI Mode, INTFSEL = 1): SRDCLK is an output from the DM9801. Used as the receive reference clock to clock out the SRXDATA when in GPSI interface mode. |
| 91 | RX_DV Or SO | O,Z | Receive Data Valid (MII Mode, INTFSEL = 0): RX_DV is asserted high to indicate that valid data is present on RXD[3:0]. Serial Data Output (GPSI Mode, INTFSEL = 1): This is the serial data output pin from the DM9801 for the SPI bus. The SPI bus operation is only valid if GPSI mode is selected. |
| 93 | CRS | O,Z | Carrier Sense: This pin is asserted high to indicate the presence of carrier due to receive or transmit activities. |
| 92 | COL or CLSN | O,Z | Collision Detect MII Mode, INTFSEL = 0): COL is asserted high to indicate detection of collision condition. Collision Detect (GPSI Mode, INTFSEL = 1): CLSN is asserted high to indicate detection of collision condition. |

Pin Description (Continued)

| | | | |
|--|------------------------------------|-----------|---|
| PHY Address Interface: PHYAD[4:0] provides up to 32 unique PHY address. An address selection of all zeros (00000) will result in a PHY isolation condition. See the isolate bit description in the BMCR, address 00. | | | |
| 68 | PHYADSEL (PHYAD0) Or SCLK | I/O,Z | MII Serial Management PHY Address Select (MII Mode, INTFSEL = 0): PHYADSEL is an input signal that selects one of two PHY addresses within the 32-address range for the DM9801 MII management interface when both CONFIG1 and CONFIG0 are not set to 1. 0 = 0x01 address 1 = 0x1F address PHY Address 0 (MII Mode, INTFSEL = 0): PHY address bit 0 for multiple PHY address applications. Both CONFIG1 and CONFIG0 must be set to 1. Serial Interface Clock (GPSI Mode, INTFSEL = 1): SCLK is a bi-directional clock signal used to synchronize SI, SO and SCS# to and from the DM9801 SPI bus. |
| 8 | PHYAD1 | I/O, Z | PHY Address 1 (MII Mode, INTFSEL = 0): PHY address bit 1 for multiple PHY address applications. Both CONFIG1 and CONFIG0 must be set to 1. Leave unconnected when both CONFIG1 and CONFIG0 are not 1. |
| 9 | PHYAD2 | I/O, Z | PHY Address 2 (MII Mode, INTFSEL = 0): PHY address bit 2 for multiple PHY address applications. Both CONFIG1 and CONFIG0 must be set to 1. Leave unconnected when both CONFIG1 and CONFIG0 are not 1. |
| 10 | PHYAD3 | I/O, Z | PHY Address 3 (MII Mode, INTFSEL = 0): PHY address bit 3 for multiple PHY address applications. Both CONFIG1 and CONFIG0 must be set to 1. Leave unconnected when both CONFIG1 and CONFIG0 are not 1. |
| 47 | PHYAD4 | I/O, Z | PHY Address 4 (MII Mode, INTFSEL = 0): PHY address bit 4 for multiple PHY address applications. Both CONFIG1 and CONFIG0 must be set to 1. Leave unconnected when both CONFIG1 and CONFIG0 are not 1. |

Pin Description (Continued)

| Pin No. | Pin Name | I/O | Description | | | | | | | | | | | | | | | |
|--------------------------------------|--------------------|---|--|---------|---------|------------------------|---|---|---|---|---|---|---|---|--|---|---|---|
| Configuration and Control Interface: | | | | | | | | | | | | | | | | | | |
| 64 | RESET# | I | Reset: Active Low input that initializes the DM9801. Should remain low for 10ms after VCC has stabilized at 3.3Vdc (nominal) before it transitions high. | | | | | | | | | | | | | | | |
| 63 62 | CONFIG0 CONFIG1 | I | Configuration Select 1:0: These input pins select the DM9801 configuration from a reset condition. <table><tr><th>CONFIG1</th><th>CONFIG0</th><th>Configuration Selected</th></tr><tr><td>0</td><td>0</td><td>TXLED, RXLED and COLLED configuration *</td></tr><tr><td>0</td><td>1</td><td>ACTLED, LNKLED and COLLED configuration *</td></tr><tr><td>1</td><td>0</td><td>ACTLED, LNKLED and COLLED configuration with MII Management Register 0-6 emulation support *</td></tr><tr><td>1</td><td>1</td><td>ACTLED, LNKLED and COLLED Configuration with MII Management Register 0-6 emulation and 32 PHY addresses support</td></tr></table> *see the DM9801 description for a more detailed explanation | CONFIG1 | CONFIG0 | Configuration Selected | 0 | 0 | TXLED, RXLED and COLLED configuration * | 0 | 1 | ACTLED, LNKLED and COLLED configuration * | 1 | 0 | ACTLED, LNKLED and COLLED configuration with MII Management Register 0-6 emulation support * | 1 | 1 | ACTLED, LNKLED and COLLED Configuration with MII Management Register 0-6 emulation and 32 PHY addresses support |
| CONFIG1 | CONFIG0 | Configuration Selected | | | | | | | | | | | | | | | | |
| 0 | 0 | TXLED, RXLED and COLLED configuration * | | | | | | | | | | | | | | | | |
| 0 | 1 | ACTLED, LNKLED and COLLED configuration * | | | | | | | | | | | | | | | | |
| 1 | 0 | ACTLED, LNKLED and COLLED configuration with MII Management Register 0-6 emulation support * | | | | | | | | | | | | | | | | |
| 1 | 1 | ACTLED, LNKLED and COLLED Configuration with MII Management Register 0-6 emulation and 32 PHY addresses support | | | | | | | | | | | | | | | | |
| 61 | INTFSEL | I | Interface Select: This pin selects either the MII interface or the GPSI interface. 0 = MII 1 = GPSI | | | | | | | | | | | | | | | |
| 60 | CMDENA | I | Command Enable: This pin enables a remote master node to alter the management register values of the local DM9801. | | | | | | | | | | | | | | | |
| 59 | SPDSEL | I | Speed Select: This pin will select the 1M network speed. 0 = Low Speed 1 = High Speed | | | | | | | | | | | | | | | |
| 58 | PWRSEL | I | Power Select: This pin will select the 1M network power. 0 = Low Power 1 = High Power | | | | | | | | | | | | | | | |
| 65 | TRIDRV | I | Tri-state all Outputs: This pin, when asserted high, will tri-state all outputs (no effect on open-drain outputs). | | | | | | | | | | | | | | | |
| 57 | FWENA | I | Four Wire Interface Enable: This pin, when asserted high, will enable the HNPB and HNNB driver pair for operation. When low, the secondary drivers are powered down. | | | | | | | | | | | | | | | |
| 6 | INT# | OD | Interrupt Request: This pin will be asserted low when an interrupt condition exists in the DM9801. | | | | | | | | | | | | | | | |



Pin Description (Continued)

| Pin No. | Pin Name | I/O | Description |
|---|-------------------------|-----|---|
| LED Interface : These outputs can directly drive LEDs or provide status information to a network management device. | | | |
| 13 | TXLED# or ACTLED# | OD | Transmit LED: Indicates the DM9801 is transmitting data (Active low, Open drain). <i>Config0 = 0 and Config1 = 0</i> Activity LED: Indicates the DM9801 is either transmitting or receiving data (Active low, Open drain). |
| 12 | RXLED# or LNKLED# | OD | Receive LED: Indicates the presence of receive data activity by the DM9801 (Active low, Open drain). <i>Config0 = 0 and Config1 = 0</i> Link LED: Indicates Good Link status and that the Link Integrity Timer has not expired (Active low, Open drain). |
| 11 | COLLED# | OD | Collision LED: Indicates the presence of collision activity on the 1M network (Active low, Open drain). |
| Home Phoneline Network Media Interface: | | | |
| 36 | HNPA | ALG | Home Network Interface, Positive, Primary: This is the positive interface connection of the primary 1M network interface. |
| 37 | HNNA | ALG | Home Network Interface, Negative, Primary: This is the negative interface connection of the primary 1M network interface. |
| 40 | HNPB | ALG | Home Network Interface, Positive, Secondary: This is the positive interface connection of the secondary 1M network interface. |
| 41 | HNNB | ALG | Home Network Interface, Negative, Secondary: This is the negative interface connection of the secondary 1M network interface. |



Pin Description (Continued)

| Pin No. | Pin Name | I/O | Description |
|---|----------|-------|--|
| Miscellaneous: | | | |
| 7 | LNKSTA | I/O,Z | Link Status: Output, positive true logic. Indication of Link Status. |
| 45 | XTAL1 | ALG | Crystal Pin 1: This pin should be connected to one side of a 20MHz (± 50 PPM) crystal. |
| 46 | XTAL2 | ALG | Crystal Pin 2: This pin should be connected to the other side of a 20MHz (± 50 PPM) crystal. |
| 21 | BGREF | ALG | Bandgap Voltage Reference: Connect a 6.20_K Ω , 1% resistor between this pin and the BGGND pin to provide an accurate current reference for the DM9801. |
| 22 | BGGND | ALG | Bandgap Voltage Reference Return: Return pin for the 6.20_K Ω resistor connection. |
| 53 | TSTMODE | I | Test Mode Control Pin: TSTMODE=0: Normal operating mode. TSTMODE=1: Enable test mode. |
| 1, 2, 3,5, 15 – 18, 20, 23 – 27, 30 - 32, 35, 42, 44, 49 – 52, 54, 56, 69, 70, 73 – 78, 80, 87, 89, 98, 99, 100 | NC | | No Connect: These pins are reserved. Leave these pins unconnected (floating). |
| Power and Ground: The power (VCC) and ground (GND) pins of the DM9801 are grouped in pairs of two categories - Digital Circuitry Power/Ground Pairs and Analog Circuitry Power/Ground Pair. | | | |
| 14, 48, 55, 79, 88, | DGND | P | Digital logic ground |
| 4, 71, 72 | DVCC | P | Digital logic power supply |
| 28, 29, 38, 39 | AGND | P | Analog circuit ground |
| 19, 33, 34, 43 | AVCC | P | Analog circuit power supply |

Functional Description

The DM9801 is a single-chip Home Phoneline Network transceiver. The DM9801 provides an IEEE 802.3u subset Media Independent Interface (MII) or a pseudo-standard General Purpose Serial Interface (GPSI).

The DM9801 enables home networking by allowing Ethernet packets to be transported over common home telephone wiring with no modifications, using Ethernet CSMA/CD media access control procedures as defined in the IEEE 802.3 standard. Figure 1 shows the major functional blocks implemented in the DM9801.

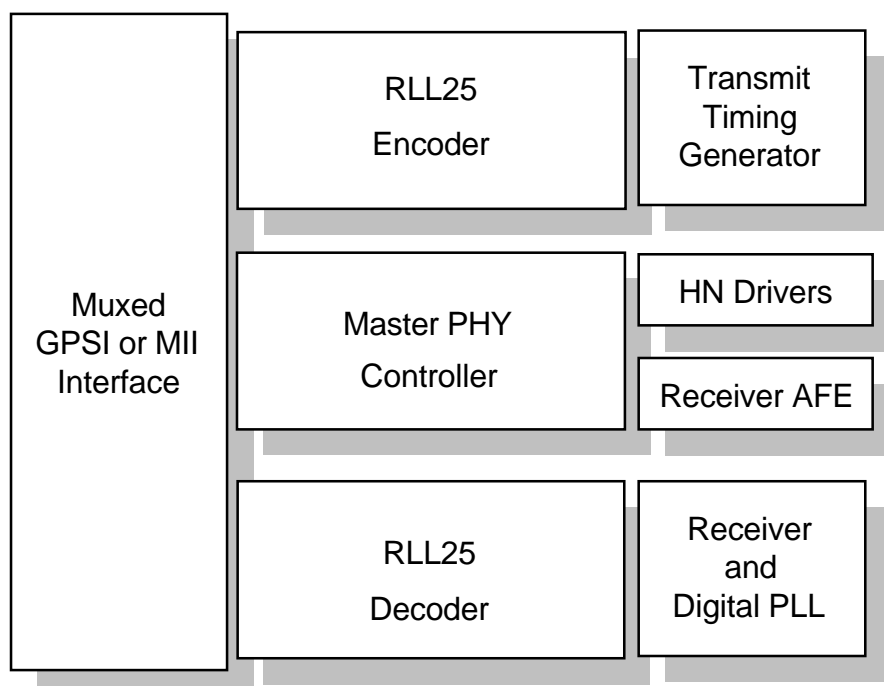


Figure 1

MII Interface

The DM9801 provides a subset Media Independent Interface (MII) or a pseudo-standard General Purpose Serial Interface (GPSI). The MII interface provides a simple, easy way to implement connection between the MAC Reconciliation layer and the DM9801 transceiver. The MII is designed to make the differences between various media transparent to the MAC sublayer. The MII consists of a nibble wide receive data bus, a nibble wide transmit data bus, and control signals to facilitate data transfers between the PHY and the Reconciliation layer.

TXD (transmit data) is a nibble (4 bits) of data that are driven by the reconciliation sublayer synchronously with respect to TX_CLK. For each TX_CLK period, which TX_EN is asserted, TXD (3:0) are accepted for transmission by the PHY.

TX_CLK (transmit clock) output to the MAC reconciliation sublayer is a clock that provides the timing reference for the transfer of the TX_EN, TXD, and TX_ER signals.

TX_EN (transmit enable) input from the MAC reconciliation sublayer to indicate nibbles are being presented on the MII for transmission on the physical medium.

MII Interface (continued)

RXD (receive data) is a nibble (4 bits) of data that are sampled by the reconciliation sublayer synchronously with respect to RX_CLK. For each RX_CLK period that RX_DV is asserted, RXD (3:0) are transferred from the PHY to the MAC reconciliation sublayer.

RX_CLK (receive clock) output to the MAC reconciliation sublayer is a clock that provides the timing reference for the transfer of the RX_DV, RXD, and RX_ER signals.

RX_DV (receive data valid) input from the PHY to indicate the PHY is presenting recovered and decoded nibbles to the MAC reconciliation sublayer. To interpret a receive frame correctly by the reconciliation sublayer, RX_DV must encompass the frame starting no later than the Start-of-Frame delimiter and excluding any End-Stream delimiter.

CRS (carrier sense) is asserted by the PHY when either the transmit or receive medium is non-idle and deasserted by the PHY when the transmit and receive medium are idle.

MII Serial Management

The MII serial management interface consists of a data interface, basic register set, and a serial management interface to the register set. Through this interface it is possible to control and configure multiple PHY devices, get status and error information, and determine the type and capabilities of the attached PHY device(s).


The DM9801 management functions correspond to MII specification for IEEE 802.3u-1995 (Clause 22) for registers 0 through 6 with vendor-specific registers 16 through 31.

In read/write operation, the management data frame is 64-bits long and starts with 32 contiguous logic one bits (preamble) synchronization clock cycles on MDC. The Start of Frame Delimiter (SFD) is indicated by a <01> pattern followed by the operation code (OP): <10> indicates Read operation and <01> indicates Write operation. For read operation, a 2-bit turnaround (TA) filing between Register Address field and Data field is provided for MDIO to avoid contention. Following the turnaround time, 16-bit data is read from or written to the management registers.

Serial Management Interface

The serial control interface uses a simple two-wired serial interface to obtain and control the status of the physical layer through the MII interface. The serial control interface consists of MDC (Management Data Clock), and MDI/O (Management Data Input/Output) signals. The MDIO pin is bi-directional and may be shared by up to 32 devices.

MII Interface Transmit and Receive Timing Diagram

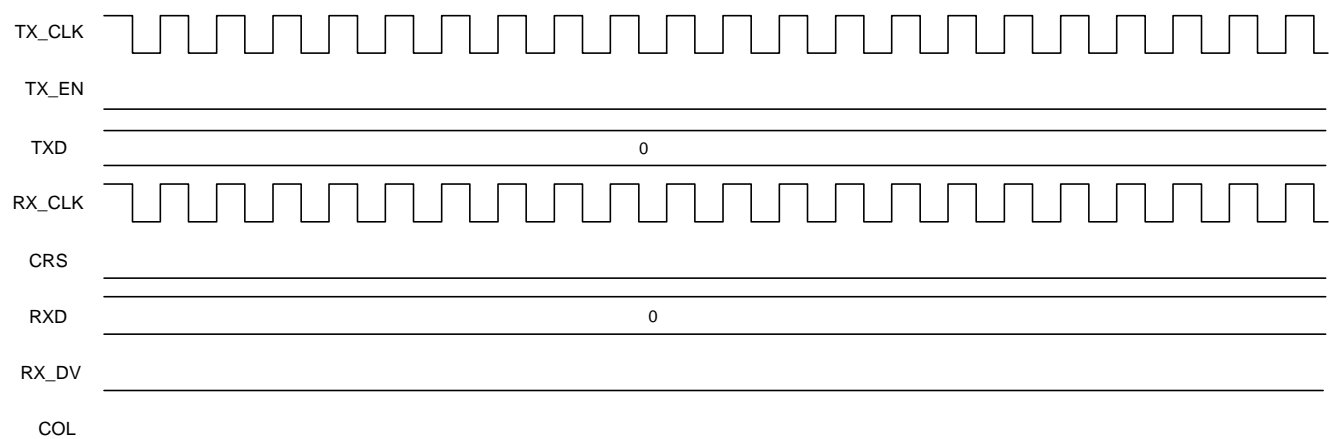


RX_CLK and TX_CLK are synchronized. All signals are inactive. The period of the two clock is 2333.3 ns.

Idle State

Figure 2


MII Interface Transmit and Receive Timing Diagram (continued)

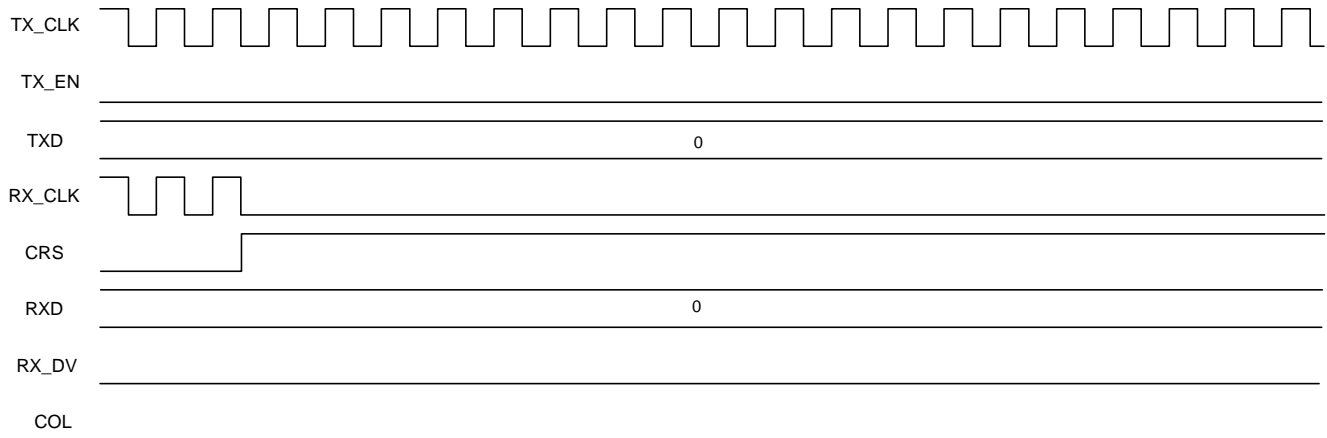

RX_CLK becomes disabled (and left in the low state) as soon as CRS is asserted. The clock is re-enabled about 140 uS into the packet.

RXPKT – CRS Asserted

Figure 3

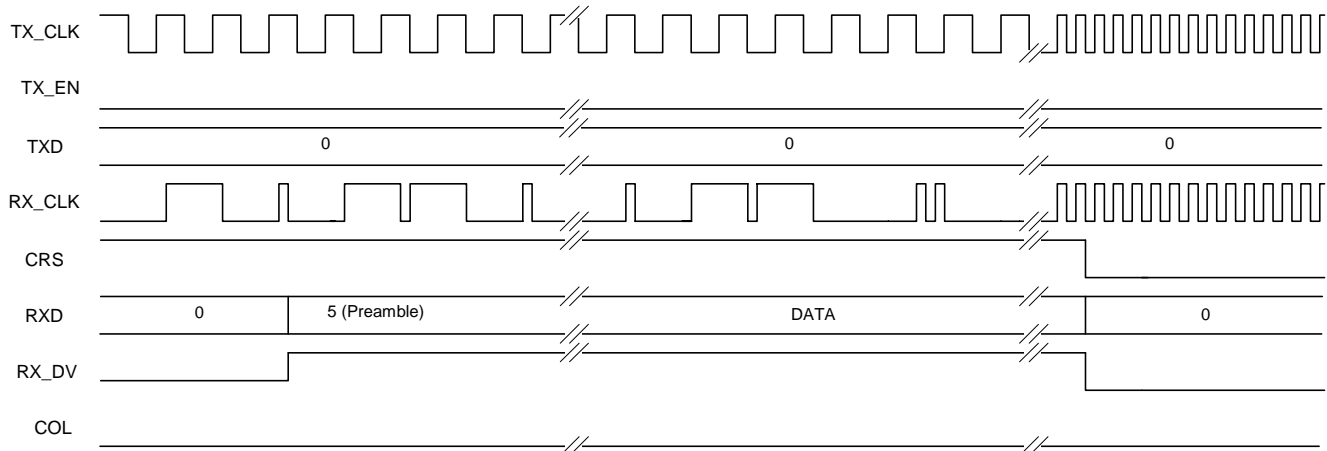


RX_CLK and TX_CLK are unrelated to each other during this time. When a symbol has been received and decoded, RX_CLK toggles at various frequencies depending on what data have been received. Once CRS falls, RX_CLK and TX_CLK are toggled continuously at 933.3 ns for 22 cycles, after which DM9801 returns to the Idle State.

RXPKT – RX_CLK Active and CRS Cleared

Figure 4


MII Interface Transmit and Receive Timing Diagram (continued)

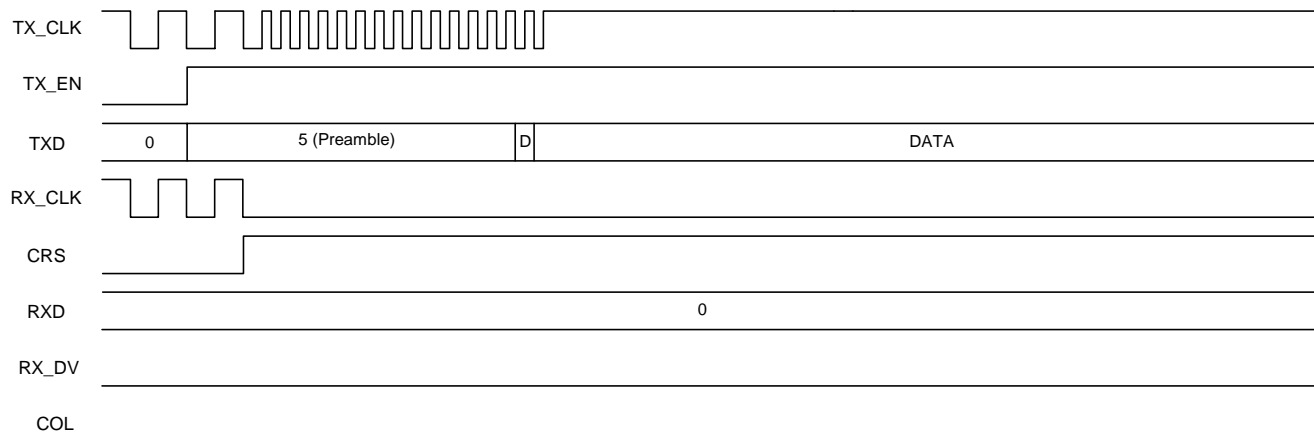

Once TX_EN is asserted, DM9801 stops RX_CLK, asserts CRS, and toggles TX_CLK at 933.3 ns.

TXPKT – TX_EN Asserted

Figure 5

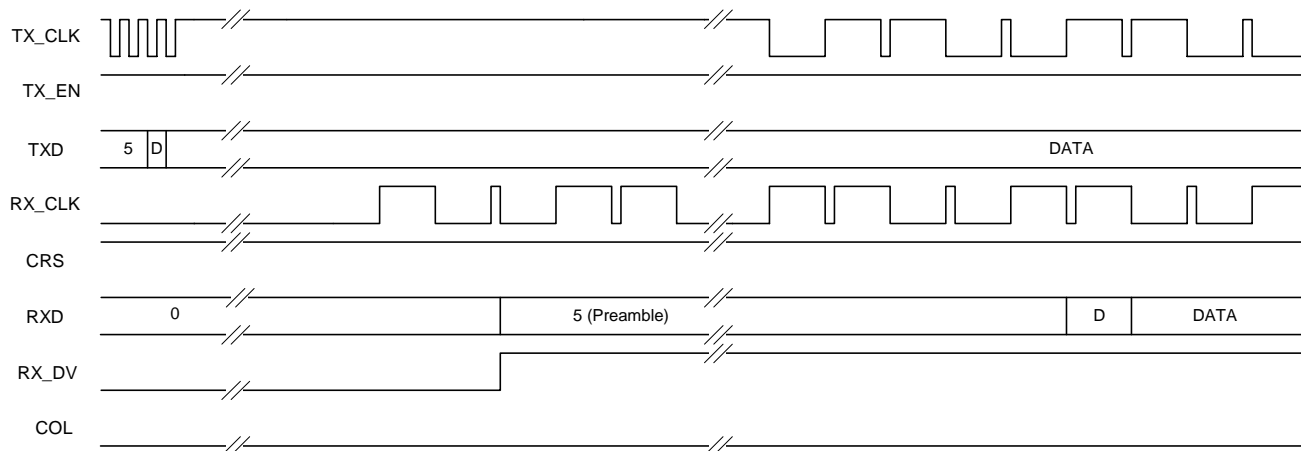


TX_CLK continues to toggle at 933.3 ns until the SFD is observed, as shown in the first section of the above diagram. At this point, TX_CLK is disabled (high) until AID header has been transmitted on the wire (or until a COL has been detected). This takes about 120 us, at which time RX_CLK starts toggling, thereby shifting 32 bits of preamble and SFD back to the MAC. Sometime later, the TX_CLK restarts as symbols get sent onto the wire in an analogous manner as RX_CLK during packet reception.

TXPKT – RX_CLK Active


Figure 6

MII Interface Transmit and Receive Timing Diagram (continued)

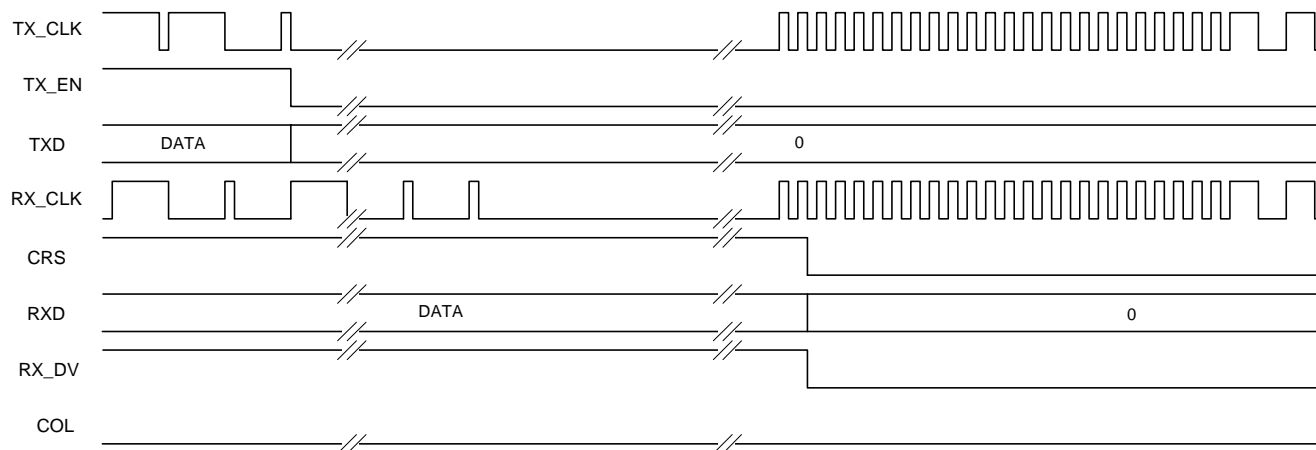

Once TX_EN is cleared, the last symbol gets encoded and transmitted, the looped-back data is presented back to the MAC, and CRS falls. Once CRS falls, TX_CLK and RX_CLK toggles with a period of 933.3 ns for 22 clocks, after which the system returns to the Idle State.


TXPKT – TX_EN Cleared
Figure 7

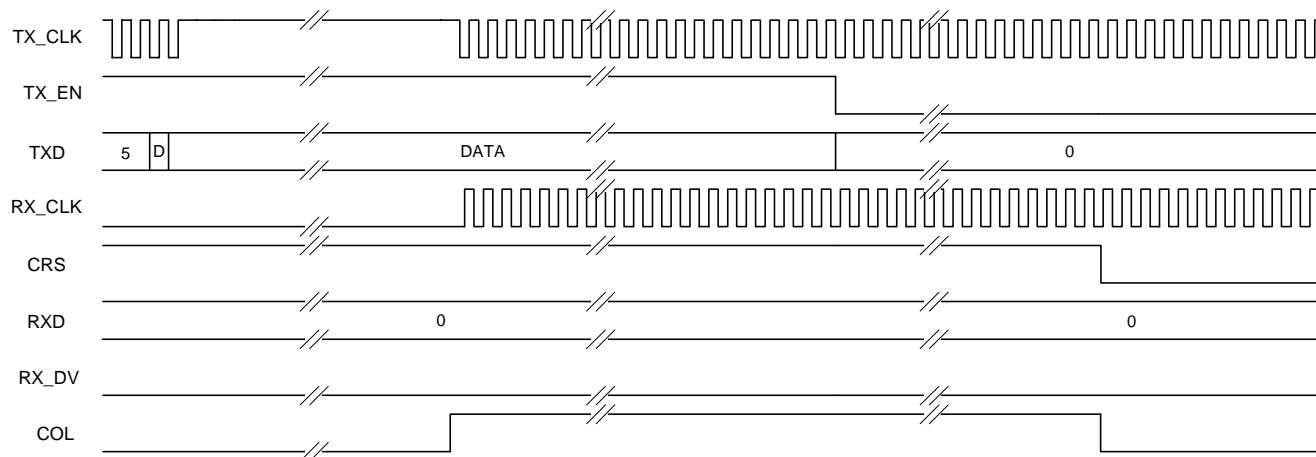

COL will be asserted sometime after the preamble and SFD have been clocked in. TX_CLK and RX_CLK are then clocked with a period 933.3 ns until CRS drops. TX_EN drops sometime after COL was asserted. CRS and COL are dropped after more than 80 clocks. TX_CLK and RX_CLK keep toggling at 933.3 ns period for roughly another 25 clock cycles, when the system returns to the Idle State.

TXPKT – COL Asserted
Figure 8


MII Interface Transmit and Receive Timing Diagram (continued)

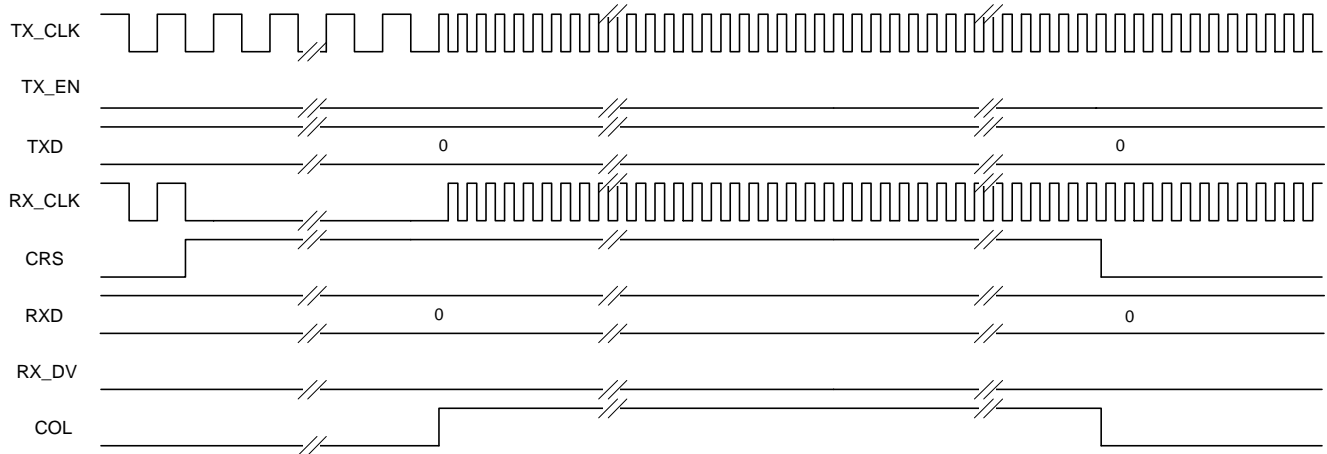

COL may be asserted up to 120 us after CRS has been asserted. Once COL has been asserted, TX_CLK and RX_CLK run at a period of 933.3 ns until COL and CRS are cleared. It can take up to about 600 us for CRS to clear.

RXPKT – COL Asserted
Figure 9

Management Interface - Read Frame Structure

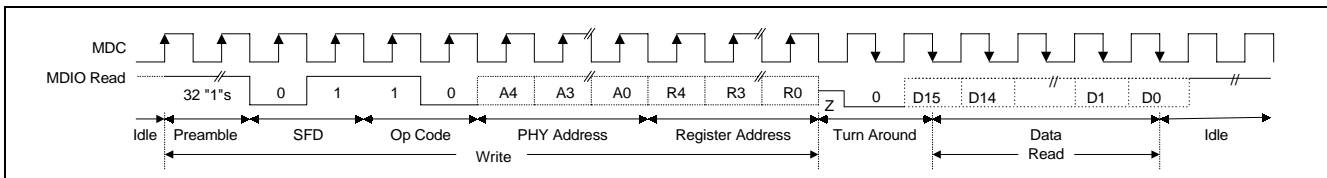

Management Interface - Write Frame Structure

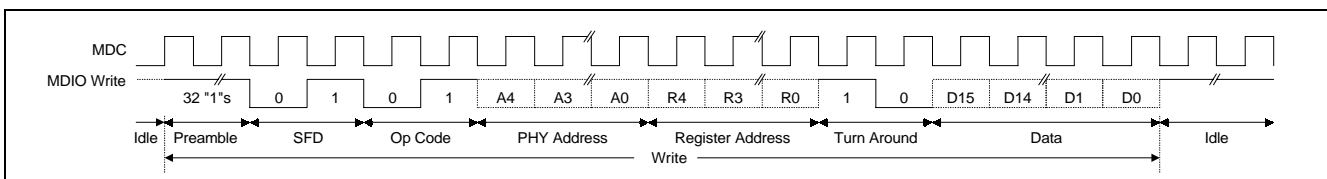


Figure 10



General Purpose Serial Interface

The DM 9801 provides a subset Media Independent Interface (MII) or a pseudo-standard General Purpose Serial Interface (GPSI). The GPSI interface provides a simple, easy way to implement connection between the MAC Reconciliation layer and the DM9801 transceiver. The GPSI is designed to make the differences between various media transparent to the MAC sublayer.

The GPSI interface provides a serial receive data bus, a serial transmit data bus, and control signals to facilitate data transfers between the DM9801 transceiver and the Reconciliation layer. The seven signals which comprise the GPSI are STXDAT, STDCLK, STXEN, SRXDAT, SRXCLK, CLSN, and CRS. Of these, only STXEN and STXDAT are inputs to the DM9801, the other five are outputs from the DM9801.

STXDAT (serial transmit data) is a serial stream of data that are driven by the reconciliation sublayer synchronously with respect to STDCLK. For each STDCLK period, which STXEN is asserted, STXDAT is accepted for transmission by the PHY.

STDCLK (serial transmit data clock) is an output to the MAC reconciliation sublayer. STDCLK is a clock that provides the timing reference for the transfer of the STXDAT in GPSI mode.

STXEN (serial transmit enable) input from the MAC reconciliation sublayer to indicate serial data is being presented on the GPSI for transmission on the physical medium.


SRXDAT (serial receive data) is a serial stream of data that is sampled by the reconciliation sublayer synchronously with respect to SRXCLK.

SRXCLK (serial receive data clock) is an output to the MAC reconciliation sublayer. SRDCLK is a clock that provides the timing reference for the transfer of the SRXDAT in GPSI mode.

CLSN (collision detect) is an output to the MAC reconciliation sublayer. CLSN is asserted high to indicate detection of collision condition

CRS (carrier sense) is an output to the MAC reconciliation sublayer that is asserted high to indicate the presence of carrier due to receive or transmit activities.


The subsequent sections analyze each GPSI related state of the DM9801 in detail.

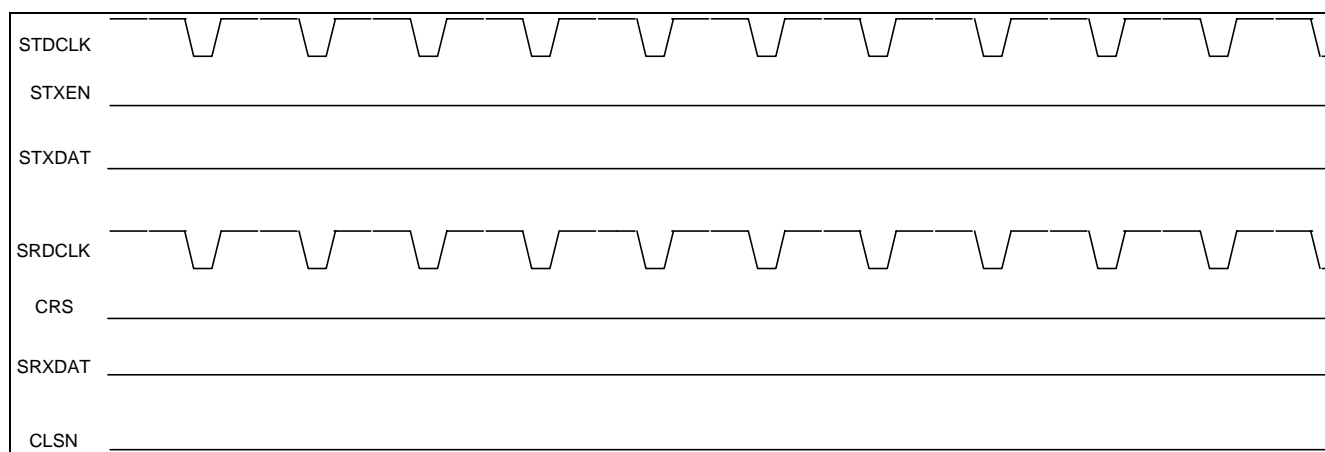

SRDCLK and STDCLK are synchronized. All other signals are inactive.

Idle State
Figure 11


General Purpose Serial Interface (continued)

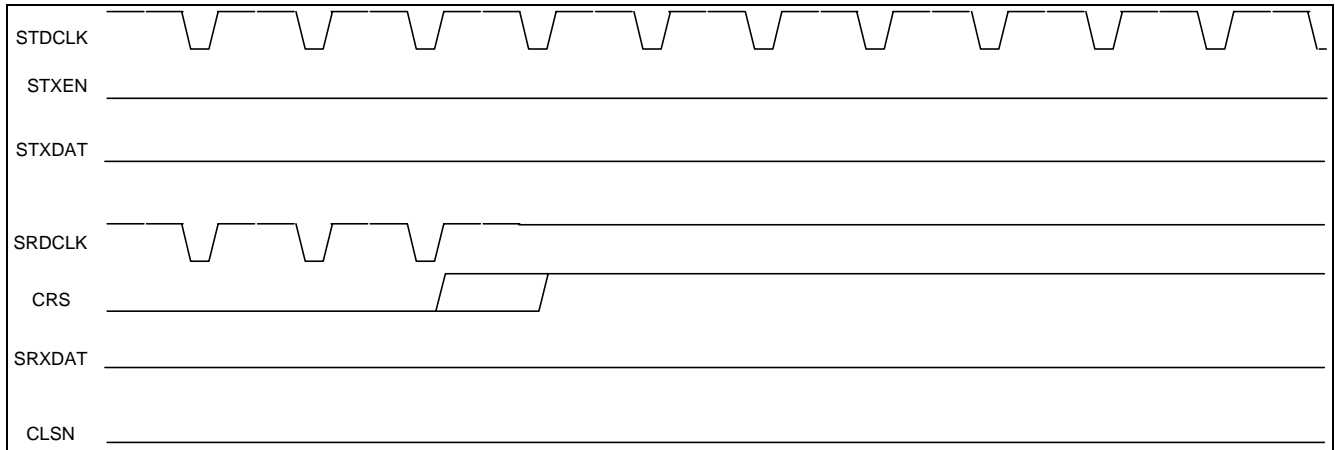

SRDCLK becomes disabled as soon as CRS is asserted.

RXPKT- CRS Asserted

Figure 12

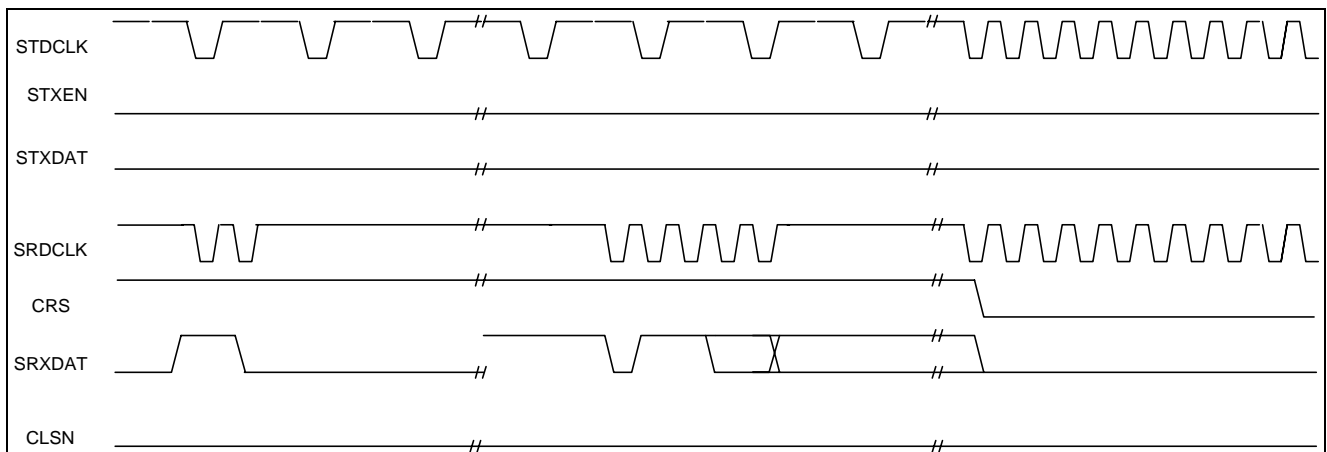


SRDCLK and STDCLK are unrelated to each other during this time. When a symbol has been received and decoded, SRDCLK toggles in order to shift out the three to six bits encoded in the symbol. The middle portion of this diagram shows the end of the preamble, followed by the SFD and the beginning of the datagram. CRS will fall after the last received symbol. Once CRS falls, SRDCLK and STDCLK are toggled continuously for 97 cycles after which the DM9801 returns to the Idle state.

RXPKT - SRDCLK Active and CRS Cleared

Figure 13


General Purpose Serial Interface (continued)

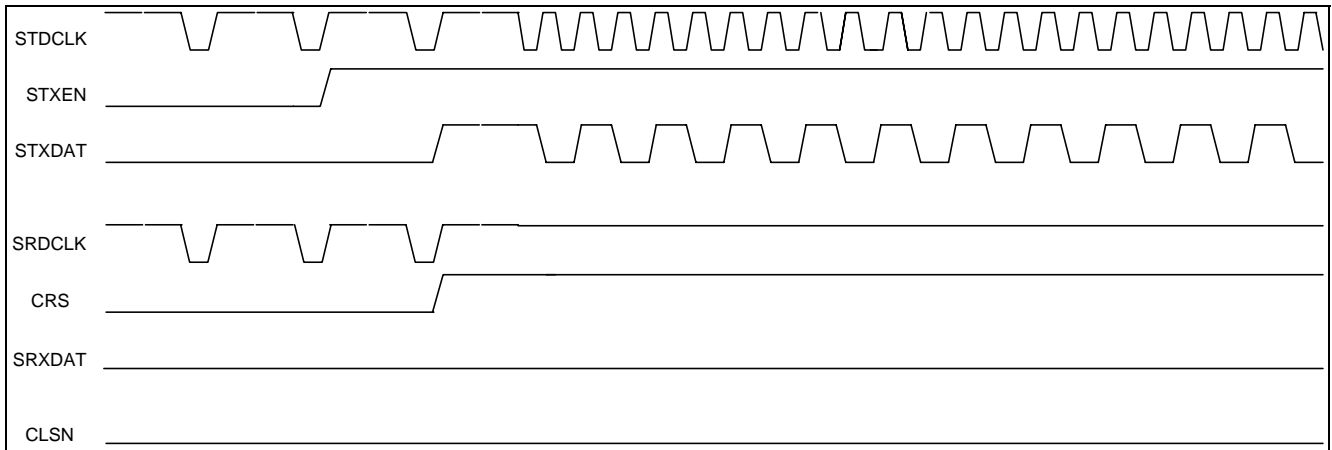

Once STXEN is asserted, the DM9801 stops SRDCLK, asserts CRS, and toggles STDCLK.

TXPKT - STXEN Asserted


Figure 14

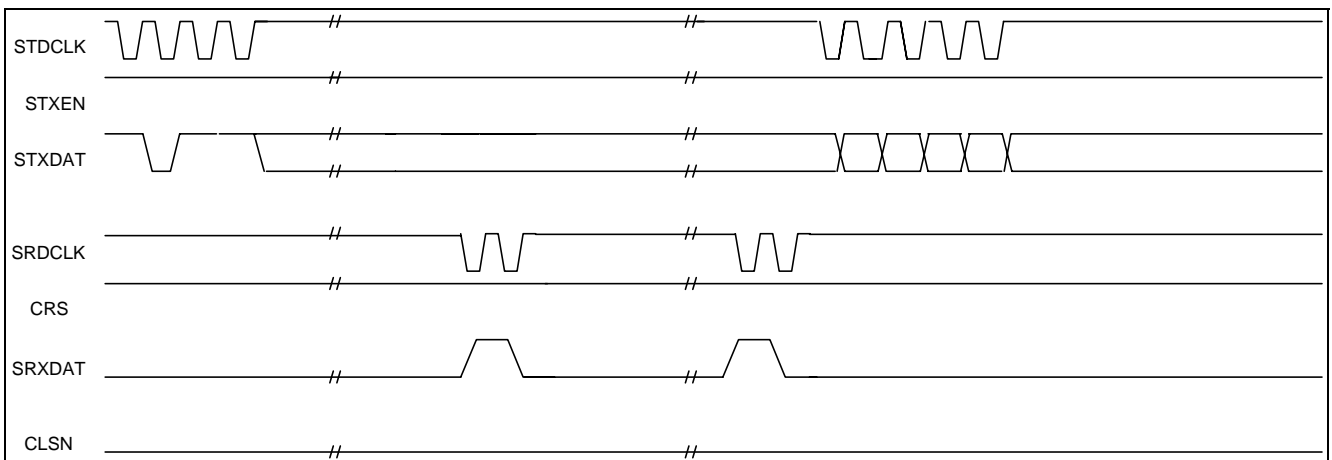

STDCLK continues to toggle until SFD is observed, as shown in the first section on the above diagram. At this point, STDCLK is disabled until the AID header has been transmitted on the wire or until CLS has been detected. At this time SRDCLK starts toggling, thereby shifting 32 bits of preamble and SFD back to the MAC. Sometime later, the STDCLK restarts as symbols get sent onto the wire in an analogous manner as SRDCLK during packet reception.

TXPKT - SRDCLK Active


Figure 15

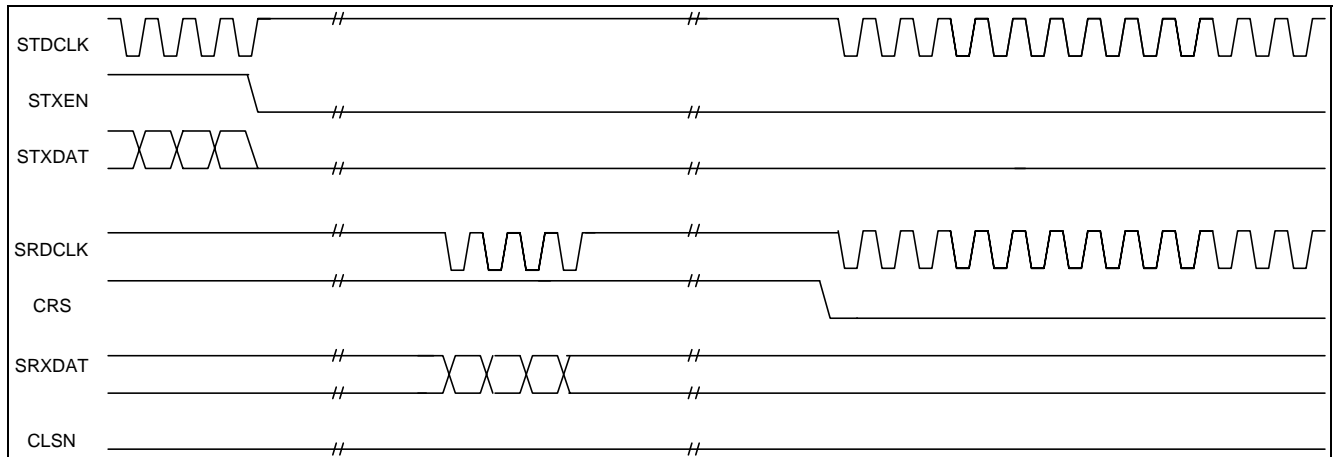General Purpose Serial Interface (continued)


Once STXEN is cleared, the last symbol gets encoded and transmitted. The looped-back data is presented back to the MAC and sometime later CRS falls. Once CRS falls, STDCLK and SRDCLK toggle for 97 clocks after which the system returns to the Idle state.

TXPKT - STXEN Cleared

Figure 16

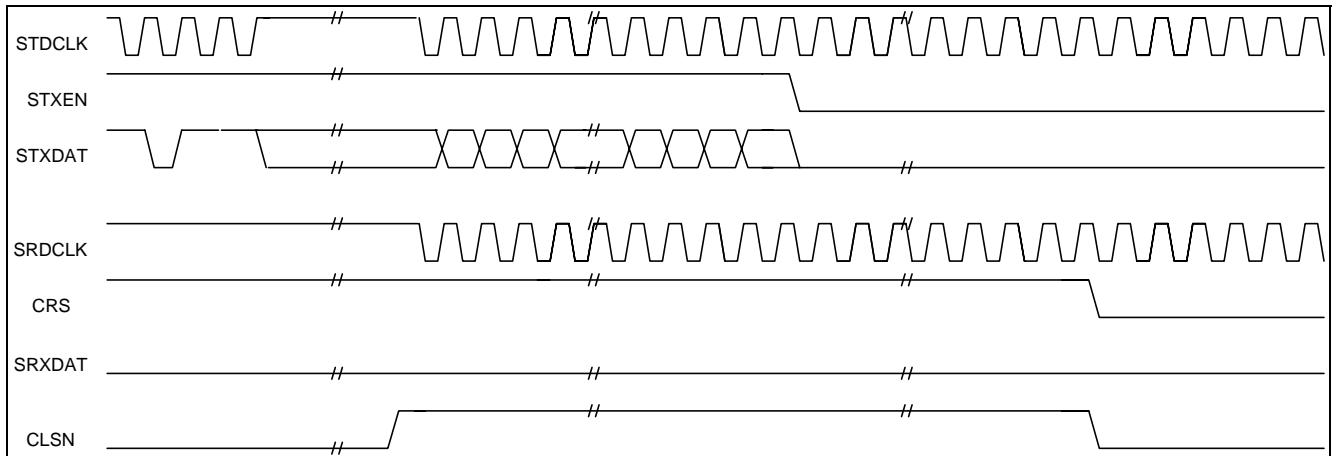


CLSN will be asserted some time after the preamble and SFD have been clocked in. STDCLK and SRDCLK are then clocked until CRS drops. STXEN drops sometime after CLSN was asserted. CRS and CLSN are dropped together after more than 500 clocks. STDCLK and SRDCLK keep toggling for approximately another 100 clock cycles, then the system returns to the idle state.

TXPKT - CLSN Asserted

Figure 17



General Purpose Serial Interface (continued)

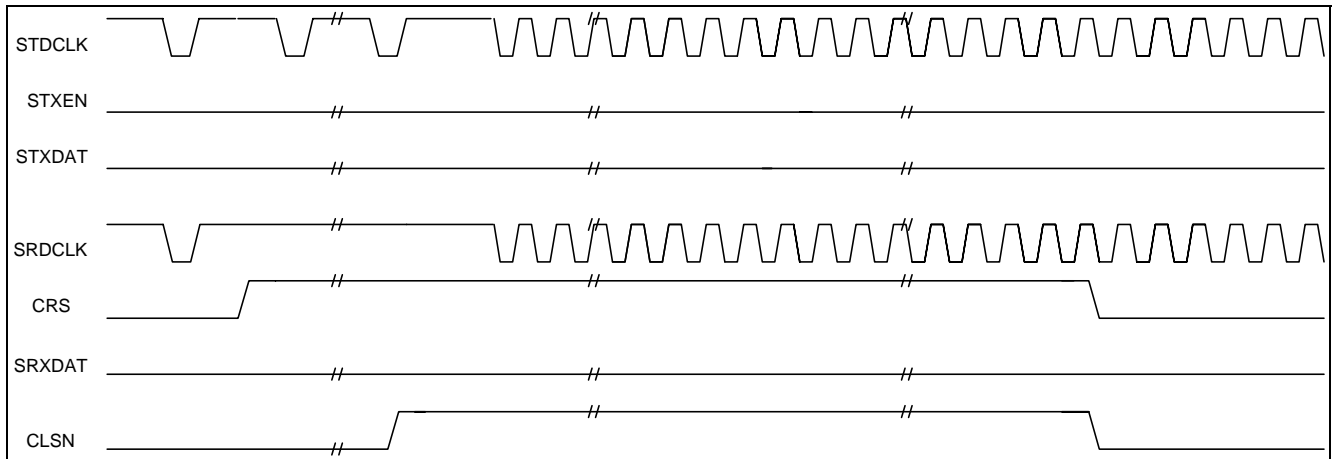

CLSN may be asserted up to 120us after CRS has been asserted. Once CLSN has been asserted STDCLK and SRDCLK run at a period of 233.3ns per cycle until 97 cycles after CLSN and CRS are cleared. It can take up to about 60us for CRS to clear.

RXPKT - CLSN Cleared
Figure 18

Serial Peripheral Interface (SPI) Bus

When INTFSEL is asserted, the DM9801 is configured to operate in SPI mode. While configured to operate in SPI mode, the DM9801 can act as a SPI Slave or SPI Master. Asserting SMODE places the DM9801 in SPI Slave mode. Clearing SMODE places the DM9801 in SPI Master Mode.

The SPI (Serial Peripheral Interface) Bus uses a four-wired serial interface to obtain and control the status of the physical layer through the SPI Bus interface. The serial control interface consists of SI (serial data input), SO (serial data output), SCLK (serial clock), and SCS# (serial interface chip select) signals. When operating in Master mode the DM9801 drives the SCLK and SCS# signals, when operating in Slave mode these signals are inputs.

SPI-Slave Mode (Valid only in GPSI Mode)

When SMODE is asserted the DM9801 is configured for SPI Slave operation. Commands are issued to the DM9801 by asserting the SCS# signal, shifting in an 8-bit opcode followed by a register address and an end delimiter. If the operation is a write, the address is followed by an 8-

bit data byte. If the operation is a read, the SO pin will shift out an 8-bit data byte representing the contents of the register referenced by the address field. Only one command can be sent in one SCS# cycle. The DM9801 does not support multiple byte reads or writes.

SPI-Master Mode (Valid only in GPSI Mode)

When SMODE is cleared the DM9801 is configured for SPI Master operation. When the DM9801 is configured for SPI-Master operation, it will load all programmable registers from an external SPI type EEPROM. The memory locations loaded may be offset via the boot page pins, BP[1:0], allowing a single 256 byte serial EEPROM to hold four distinct sets of default register values.

After RESET# has cleared the DM9801 will assert SCS#, shift out a Read opcode (0x03), followed by the initial address to be read (as modified by the Boot Page pins). The DM9801 will then shift in the memory contents, auto incrementing the register address being programmed every 8-bits. Once all 64-bytes have been read, the DM9801 releases SCS#. The SCLK continues to run. Opcodes are shown in Table 1.

| Instruction Format | Instruction Name |
|--------------------|------------------|
| 0000 0110 | Set WE |
| 0000 0100 | Clear WE |
| 0000 0011 | Read |
| 0000 0010 | Write |

OPCODES

Table 1


Serial Peripheral Interface (SPI) Bus (continued)

SPI Master Mode Timing

Figure 19



SPI Slave Mode Timing

Figure 20

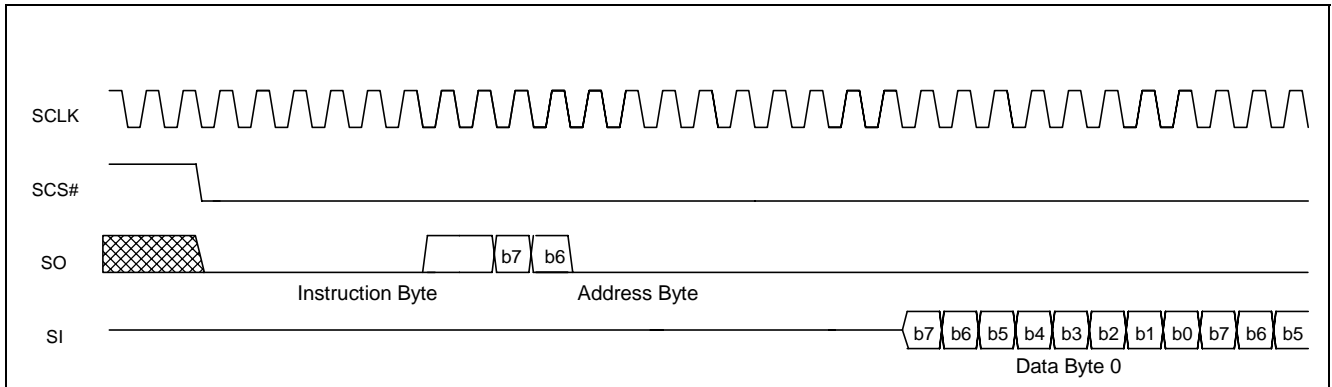MII Serial Management Register Map (INTFSEL = 0, MII Mode)

| Register Address | Register Name | Access Type | Default Value | Description |
|------------------|---------------|-------------|---------------|---|
| 0 | BMCR | RW | 0x0000 | Basic Mode Control Register (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 1 | BMSR | RO | 0x0820 | Basic Mode Status Register (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 2 | PHYIDR1 | RO | 0x0181 | PHY Identifier Register #1 (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 3 | PHYIDR2 | RO | 0xB900 | PHY Identifier Register #2 (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 4 | ANAR | RO | 0x0021 | Auto-negotiation Advertisement Register (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 5 | ANLPAR | RO | 0x0000 | Auto-negotiation Link Partner Ability Register (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 6 | ANER | RO | 0x0000 | Auto-Negotiation Expansion Register (valid only when MII Emulation Support is enabled, Config1 = 1). |
| 16 | CNTRL | RW | 0x0005 | Control Register |
| 17 | STATUS | RW | 0x0000 | Status Register |
| 18 | IMASK | RW | 0x0000 | Interrupt Mask Register |
| 19 | ISTAT | RW | 0x0000 | Interrupt Status Register |
| 20 | TX_PCOM_HI | RW | 0x0000 | Transmit PHY Communication Hi Word |
| 21 | TX_PCOM_LO | RW | 0x0000 | Transmit PHY Communication Lo Word |
| 22 | RX_PCOM_HI | RW | 0x0000 | Receive PHY Communication Hi Word |
| 23 | RX_PCOM_LO | RW | 0x0000 | Receive PHY Communication Lo Word |
| 24 | PEAK_NOISE | RW | 0xFF04 | Peak Level and Noise Level Register |
| 25 | NOISE_CNTRL_A | RW | 0x8007 | Noise Ceiling and Noise Floor Register |
| 26 | NOISE_CNTRL_B | RW | 0x00F4 | Noise Events and Noise Attack Register |
| 27 | FWENA | RW | 0x0000 | Four Wire Enable and Disable Link Register |
| 28 | AID_ADDRESS | RW | 0x0000 | AID Address Register |
| 29 | AID_CNTRL | RW | 0x4014 | AID Interval and AID ISBI Register |
| 30 | SYM_CNTRL | RW | 0x1C2C | DATA ISBI Control Register |
| 31 | TX_SIG_CNTRL | RW | 0x4404 | Transmit Pulse Control Register |

Key to Default

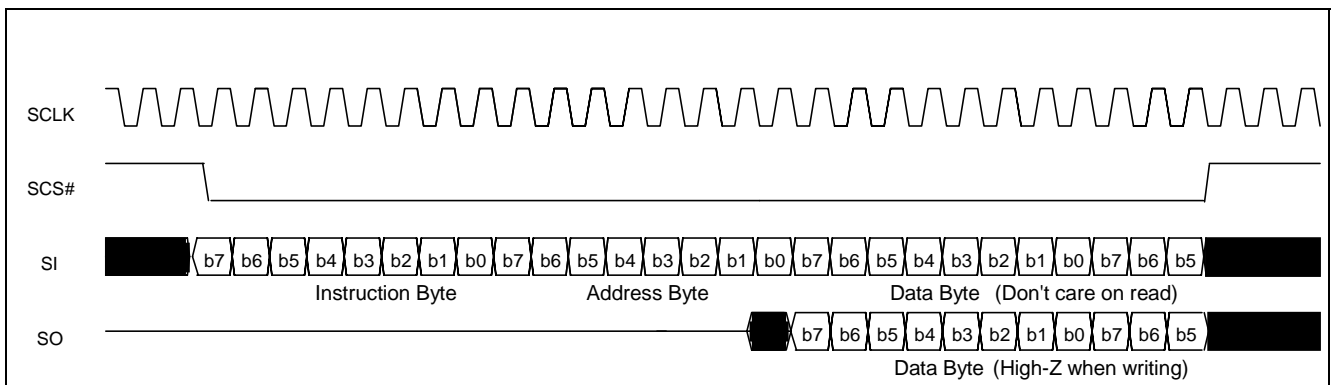In the register description that follows, the default column takes the form:

<Reset Value>, <Access Type> / <Attribute(s)>

Where

<Reset Value>:

| | |
|--------|--------------------------------------|
| 1 | Bit set to logic one |
| 0 | Bit set to logic zero |
| X | No default value |
| (PIN#) | Value latched in from pin # at reset |

<Access Type>:

RO = Read only

RW = Read/Write

<Attribute (s)>:

SC = Self clearing

P = Value permanently set

LL = Latching low

LH = Latching high

Basic Mode Control Register (BMCR) - Register 0

| Bit | Bit Name | Default | Description |
|---------|--------------------------|----------|--|
| 0.15 | Reset | 0, RW/SC | Reset: 1=Software reset 0=Normal operation When set this bit configures the PHY status and control registers to their default states. This bit will return a value of one until the reset process is complete |
| 0.14 | Loopback | 0, RW | Loopback: Loopback control register 1=Loopback enabled 0=Normal operation |
| 0.13 | Speed Selection | 0, RO/P | Speed Select: The DM9801 does not support this function. This bit is permanently set to 0 |
| 0.12 | Auto-negotiation Enable | 0,RO/P | Auto-negotiation Enable: The DM9801 does not support this function. This bit is permanently set to 0 |
| 0.11 | Power Down | 0,RW | Power Down: 1=Power down enabled 0=Normal operation Setting this bit will power down the DM9801 with the exception of the crystal oscillator circuit. |
| 0.10 | Isolate | 0,RW | Isolate: 1= Isolate 0= Normal Operation When this bit is set the data path will be isolated from the MII interface. TX_CLK, RX_CLK, RX_DV, RXD[3:0], COL and CRS will be placed in a high impedance state. The management interface is not effected by this bit. When the PHY address is set to 00000 the isolate bit will be set upon power-up/reset. |
| 0.9 | Restart Auto-negotiation | 0,RO/P | Restart Auto-negotiation: The DM9801 does not support this function. This bit is permanently set to 0 |
| 0.8 | Duplex Mode | 0,RO/P | Duplex Mode: The DM9801 does not support this function. This bit is permanently set to 0 |
| 0.7 | Collision Test | 0,RO/P | Collision Test: The DM9801 does not support this function. This bit is permanently set to 0 |
| 0.6-0.0 | Reserved | 0,RO | Reserved: Write as 0, ignore on read |

Basic Mode Status Register (BMSR) - Register 1

| Bit | Bit Name | Default | Description |
|----------|---------------------------|---------|--|
| 1.15 | 100Base-T4 | 0,RO/P | Reserved: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.14 | 100Base-TX Full Duplex | 0,RO/P | Reserved: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.13 | 100Base-TX Half Duplex | 0,RO/P | Reserved: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.12 | 10Base-T Full Duplex | 0,RO/P | Reserved: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.11 | 10Base-T Half Duplex | 1,RO/P | Reserved: The DM9801 supports half Duplex Operation only. This bit is permanently set to 1 |
| 1.10-1.7 | Reserved | 0,RO | Reserved: Write as 0, ignore on read |
| 1.6 | MF Preamble Suppression | 0,RO/P | MF Preamble Suppression: 1=PHY will accept management frames with preamble suppressed 0=PHY will not accept management frames with preamble suppressed |
| 1.5 | Auto-negotiation Complete | 1,RO/P | Auto-negotiation Complete: The DM9801 does not support this function. This bit is permanently set to 1 |
| 1.4 | Remote Fault | 0,RO/P | Remote Fault: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.3 | Auto-negotiation Ability | 0,RO/P | Auto Configuration Ability: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.2 | Link Status | 0,RO/LL | Link Status: 1=Valid link established 0=Link not established The link status bit is implemented with a latching function, so that the occurrence of a link failure condition causes the Link Status bit to be cleared and remain cleared until it is read via the management interface |
| 1.1 | Jabber Detect | 0,RO/P | Jabber Detect: The DM9801 does not support this function. This bit is permanently set to 0 |
| 1.0 | Extended Capability | 0,RO/P | Extended Capability: The DM9801 does not support this function. This bit is permanently set to 0 |

PHY ID Identifier Register #1 (PHYIDR1) - Register 2

The PHY Identifier Registers #1 and #2 work together in a single identifier of the DM9801. The Identifier consists of a concatenation of the **Organizationally Unique Identifier (OUI)**, a vendor's model number, and a model revision number. DAVICOM Semiconductor's IEEE assigned OUI is 00606E.



DM9801

1M Home Phonerline Network Physical Layer Single Chip Transceiver

| Bit | Bit Name | Default | Description |
|----------|----------|---------|---|
| 2.15-2.0 | OUI_MSB | <0181H> | OUI Most Significant Bits: This register stores bits 3 - 18 of the OUI (00606E) to bits 15 - 0 of this register respectively. The most significant two bits of the OUI are ignored (the IEEE standard refers to these as bit 1 and 2) |

PHY Identifier Register #2 (PHYIDR2) - Register 3

| Bit | Bit Name | Default | Description |
|-----------|----------|---------------|---|
| 3.15-3.10 | OUI_LSB | <101110>,RO/P | OUI Least Significant Bits: Bits 19 - 24 of the OUI (00606E) are mapped to bits 15 - 10 of this register respectively |
| 3.9-3.4 | VNDR_MDL | <010000>,RO/P | Vendor Model Number: Six bits of the vendor model number mapped to bits 9 - 4 (most significant bit to bit 9) |
| 3.3-3.0 | MDL_REV | <0000>,RO/P | Model Revision Number: Four bits of the vendor model revision number mapped to bits 3 - 0 (most significant bit to bit 3) |

Auto-negotiation Advertisement Register(ANAR) - Register 4

This register contains the advertised abilities of the DM9801 device as they will be transmitted to link partners during Auto-negotiation.

| Bit | Bit Name | Default | Description |
|-----------|----------|---------|--|
| 4.15 | NP | 0,RO/P | Next Page Indication: The DM9801 does not support the next page function. This bit is permanently set to 0 |
| 4.14 | ACK | 0,RO/P | Acknowledge: 1=Link partner ability data reception acknowledged 0=Not acknowledged The DM9801's state machine will automatically control this bit. Software should not attempt to write to this bit. |
| 4.13 | RF | 0, RO/P | Remote Fault: The DM9801 does not support this function. This bit is permanently set to 0 |
| 4.12-4.11 | Reserved | 0, RO | Reserved: Write as 0, ignore on read |
| 4.10 | FCS | 0, RO/P | Flow Control Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 4.9 | T4 | 0, RO/P | 100Base-T4 Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 4.8 | TX_FDX | 0, RO/P | 100Base-TX Full Duplex Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 4.7 | TX_HDX | 0, RO/P | 100Base-TX Support: The DM9801 does not support this function. This bit is permanently set to 0 |

Auto-negotiation Advertisement Register(ANAR) - Register 4 (continued)

| Bit | Bit Name | Default | Description |
|---------|----------|---------------|---|
| 4.6 | 10_FDX | 0, RO/P | 10Base-T Full Duplex Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 4.5 | 10_HDX | 1, RO/P | 10Base-T Support: 1=10Base-T Half Duplex supported by the link partner 0=10Base-T Half Duplex not supported by the link partner |
| 4.4-4.0 | Selector | <00001>, RO/P | Protocol Selection Bits: These bits contain the binary encoded protocol selector supported by this node. <00001> indicates that this device supports IEEE 802.3 CSMA/CD. |

Auto-negotiation Link Partner Ability Register (ANLPAR) - Register 5

This register contains the advertised abilities of the link partner as they are received during Auto-negotiation.

| Bit | Bit Name | Default | Description |
|-----------|----------|-------------|--|
| 5.15 | NP | 0, RO/P | Next Page Indication: 0= Link partner, no next page available 1= Link partner, next page available |
| 5.14 | ACK | 0, RO/P | Acknowledge: 1=Link partner ability data reception acknowledged 0=Not acknowledged The DM9801's state machine will automatically control this bit. Software should not attempt to write to this bit. |
| 5.13 | RF | 0, RO/P | Remote Fault: 1=Remote fault indicated by link partner 0=No remote fault indicated by link partner |
| 5.12-5.10 | Reserved | 0, RO | Reserved: Write as 0, ignore on read |
| 5.9 | T4 | 0, RO/P | 100Base-T4 Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 5.8 | TX_FDX | 0, RO/P | 100Base-TX Full Duplex Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 5.7 | TX_HDX | 0, RO/P | 100Base-TX Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 5.6 | 10_FDX | 0, RO/P | 10Base-T Full Duplex Support: The DM9801 does not support this function. This bit is permanently set to 0 |
| 5.5 | 10_HDX | 0, RO | 10Base-T Support: 1=10Base-T Half Duplex supported by the link partner 0=10Base-T Half Duplex not supported by the link partner |
| 5.4-5.0 | Selector | <00000>, RO | Protocol Selection Bits: Link partner binary encoded protocol selector |

Auto-negotiation Expansion Register (ANER) - Register 6

| Bit | Bit Name | Default | Description |
|----------|------------|---------|--|
| 6.15-6.5 | Reserved | 0, RO | Reserved: Write as 0, ignore on read |
| 6.4 | PDF | 0, RO/P | Local Device Parallel Detection Fault: PDF=1: A fault detected via parallel detection function. PDF=0: No fault detected via parallel detection function DM9801 does not support this function, so this bit is always 0. |
| 6.3 | LP_NP_ABLE | 0, RO/P | Link Partner Next Page Able: LP_NP_ABLE=1: Link partner, next page available LP_NP_ABLE=0: Link partner, no next page DM9801 does not support this function, so this bit is always 0. |
| 6.2 | NP_ABLE | 0,RO/P | Local Device Next Page Able: NP_ABLE=1: DM9801, next page available NP_ABLE=0: DM9801, no next page DM9801 does not support this function, so this bit is always 0. |
| 6.1 | PAGE_RX | 0, RO/P | New Page Received: A new link code word page received. This bit will be automatically cleared when the register (Register 6) is read by management. DM9801 does not support this function, so this bit is always 0. |
| 6.0 | LP_AN_ABLE | 0, RO/P | Link Partner Auto-negotiation Able: LP_AN_ABLE=1 indicates that the link partner supports Auto-negotiation. DM9801 does not support this function, so this bit is always 0. |

Control Register - Register 16

| Bit | Bit Name | Default | Description |
|-------|---------------|---------|---|
| 16.15 | IG_RMT_CMDS | 0,RW | Ignore Remote Commands: 1=Remote commands are ignored 0=Remote commands will be accepted from any node in the network. The value of the CMDENA pin is latched into this bit at power-up/reset. |
| 16.14 | AVG_PEAK_RL | 0,RW | Average Peak Rule: 1= Average peak with measured noise instead of noise + 25% 0= Normal operation |
| 16.13 | EN_SHORT_CD | 0,RW | Enable Short CD: 1= Enable short CD noise rule Do not count bad SYNC if CD is longer than 160uS 0= Normal operation |
| 16.12 | DIS_INC_NOISE | 0,RW | Disable Increment of Noise: 1= Disable 25% increase of noise slice when in a packet 0= Normal operation |
| 16.11 | CMD_LO_PWR | 0,RW | Command Low Power: 1= Transmit power is set to low 0= Normal operation Remote commands will be issued if this bit is set |
| 16.10 | CMD_HI_PWR | 0,RW | Command High Power: 1= Transmit power is set to high 0= Normal operation Remote commands will be issued if this bit is set |



Control Register - Register 16 (continued)

| Bit | Bit Name | Default | Description |
|------|-------------|---------|---|
| 16.9 | CMD_LO_SPD | 0,RW | Command Low Speed: 1= Transmit speed is set to low 0= Normal operation Remote commands will be issued if this bit is set |
| 16.8 | CMD_HI_SPD | 0,RW | Command High Speed: 1= Transmit speed is set to high 0= Normal operation Remote commands will be issued if this bit is set |
| 16.7 | AID_ADR_NEG | 0,RW | AID Address Negotiation: 1= Stop AID address negotiation 0= Normal operation |
| 16.6 | CLR_NS_EVNT | 0,RW | Clear Noise Event Register: 1= Clear the Noise Event Register 0= Normal operation |
| 16.5 | SLC_LVL_ADP | 0,RW | Slice Level Adaptation: 1= Slice level adaptation is disabled (stopped). 0= Slice level adaptation is enabled |
| 16.4 | PWR_DWN | 0,RW | Power Down: Writing a 1 to this bit will cause DM9801 to enter Sleep mode and power down all circuits except the oscillator and clock generator circuit. To exit Sleep mode, write 0 to this bit position. The prior configuration will be retained when the sleep state is terminated, but the state machine will be reset |
| 16.3 | Reserved | 0,RW | Reserved: This bit must be written as 0 |
| 16.2 | Speed | 1, RW | Speed: 1= high speed 0= low speed This bit indicates the network speed is set to high as selected by the status of the SPDSEL pin during power-up/reset. |
| 16.1 | Power | 0, RW | Power: 1= high power 0= low power This bit indicates the network power is set to high as selected by the status of the PWRSEL pin during power-up/reset. |
| 16.0 | Reserved | 1,RW | Reserved: This bit must be written as 1 |

Status Register - Register 17

| Bit | Bit Name | Default | Description |
|---------------|-------------|---------|--|
| 17.15 – 17.11 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |
| 17.10 | LINK_STA | 0, RO | Link Status: This bit reports the Link Status of the DM9801 |
| 17.9 | DIS_LED_STR | 0, RW | Disable LED Stretchers: This bit disables LED pulse stretchers |
| 17.8 – 17.7 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |
| 17.6 | RX_PWR | 0, RO | Receive Power: This bit is an indication of the current receive signal power. 1= The receive signal power is high. 0= The receive signal power is low. |
| 17.5 | RX_SPD | 0, RO | Receive Speed: This bit is an indication of the current receive speed. 1= The receive speed is high. 0= The receive speed is low. |
| 17.4 | RX_VER | 0, RO | Receive Version: This bit is an indication of the current receive version. 1= The receive version is not version 0. 0= The receive version is version 0. |
| 17.3 - 17.0 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |

IMASK (Interrupt Mask) Register - Register 18

| Bit | Bit Name | Default | Description |
|---------------|---------------------|---------|---|
| 18.15 – 18.10 | Software Interrupts | 0,RW | Software Interrupts: 1= Software interrupts will not activate the INT# pin 0= Software interrupts will activate the INT# pin |
| 18.9 | MSK_RX_PCOM | 0,RW | Mask RXPCOM Valid: 1= RX_PCOM_VAL will not activate the INT# pin 0= RX_PCOM_VAL will activate the INT# pin |
| 18.8 | MSK_TX_PCOM | 0,RW | Mask TXPCOM Ready: 1= TX_PCOM_RDY will not activate the INT# pin 0= TX_PCOM_RDY will activate the INT# pin |
| 18.7 – 18.4 | Reserved | 0,RW | Reserved: Write as 0, ignore on read |
| 18.3 | MSK_PKT_RCV | 0,RW | Mask Packet Received: 1= Packet Received will not activate the INT# pin 0= Packet Received will activate the INT# pin |
| 18.2 | MSK_PKT_XMIT | 0,RW | Packet Transmitted: 1= Packet Transmitted will not activate the INT# pin 0= Packet Transmitted will activate the INT# pin |
| 18.1 | MSK_RMT_RCV | 0,RW | Remote Command Received: 1= Remote Command Received will not activate the INT# pin 0= Remote Command Received will activate the INT# pin |
| 18.0 | MSK_CMD_SNT | 0,RW | Remote Command Sent: 1= Remote Command Sent will not activate the INT# pin 0= Remote Command Sent will activate the INT# pin. |

ISTAT (Interrupt Status) Register - Register 19

This register reports the state of each interrupt source regardless of the state of the IMASK Register.

| Bit | Bit Name | Default | Description |
|---------------|---------------------|---------|---|
| 19.15 – 19.10 | Software Interrupts | 0,RW | Software Interrupts: When set any bit of those registers indicates software interrupt is on. |
| 19.9 | RX_PCOM_VAL | 0,RW | RXPCOM Valid: When set this bit indicates a non-null RX_PCOM has been received. Accessing the high byte of the RX_PCOM register clears this bit. |
| 19.8 | TX_PCOM_RDY | 0,RW | TXPCOM Ready: When set this bit indicates a non-null TX_PCOM has been loaded into the TX_PCOM register. |
| 19.7 – 19.4 | Reserved | 0,RW | Reserved: Write as 0, ignore on read |
| 19.3 | PKT_RCVD | 0,RW | Packet Received: When set this bit indicates a packet has been received |
| 19.2 | PKT_XMITD | 0,RW | Packet Transmitted: When set this bit indicates a packet has been transmitted |
| 19.1 | RMT_CMD_RCV | 0,RW | Remote Command Received: When set this bit indicates a valid remote command has been received. |
| 19.0 | RMT_CMD_SNT | 0,RW | Remote Command Sent: When set this bit indicates a valid remote command has been sent. |

TX_PCOM High Register - Register 20

| Bit | Bit Name | Default | Description |
|--------------|------------|---------|---|
| 20.15 – 20.0 | TX_PCOM_HI | 0, RW | TX_PCOM_HI: The high order word of the 32-bit transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

TX_PCOM Low Register - Register 21

| Bit | Bit Name | Default | Description |
|--------------|------------|---------|--|
| 21.15 – 21.0 | TX_PCOM_LO | 0, RW | TX_PCOM_LO: The low order word of the 32-bit transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte in TX_PCOM_HI has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

RX_PCOM High Register - Register 22

| Bit | Bit Name | Default | Description |
|--------------|------------|---------|---|
| 22.15 – 22.0 | RX_PCOM_HI | 0, RW | RX_PCOM_HI: The high order word of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of this register will clear the RX_PCOM_VAL bit in the ISTAT register. |

RX_PCOM Low Register - Register 23

| Bit | Bit Name | Default | Description |
|--------------|------------|---------|--|
| 23.15 – 23.0 | RX_PCOM_LO | 0, RW | RX_PCOM_LO: The low order word of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of the RX_PCOM_HI register will clear the RX_PCOM_VAL bit in the ISTAT register. |

Peak Noise Register - Register 24

| Bit | Bit Name | Default | Description |
|--------------|-------------|----------|---|
| 24.15 - 24.8 | PEAK_LEVEL | 0xFF, RW | Peak Level: This is a measurement of the peak level of the last valid (non-collision) AID received also, the maximum allowable value of the noise measurement. If NOISE_LEVEL exceeds PEAK_LEVEL, NOISE_LEVEL is reset to NOISE_FLOOR. |
| 24.7 - 24.0 | NOISE_LEVEL | 0x04, RW | NOISE LEVEL: This is the digital value of the SLICE_LVL_NOISE output. It is effectively a measure of the noise level on the wire. When auto-adaptation is enabled (bit 5 of the Control register is false) this register is updated with the current noise count every 50n Secs. When adaptation is disabled, this register can be written and is used to generate both the SLICE_LVL_NOISE and the SLICE_LVL_DATA signals. |

Noise Control A Register - Register 25

| Bit | Bit Name | Default | Description |
|--------------|-------------|----------|--|
| 25.15 - 25.8 | NSE_CEILING | 0x80, RW | Noise Ceiling: The maximum value of the NOISE_LEVEL measurement. |
| 25.7 - 25.0 | NSE_FLOOR | 0x07, RW | Noise Floor: The minimum value of the NOISE_LEVEL measurement. |

**Noise Control B Register - Register 26**

| Bit | Bit Name | Default | Description |
|--------------|------------|----------|---|
| 26.15 - 26.8 | NSE_EVENTS | 0x00, RW | Noise Events: An 8 bit counter that records the number of noise events detected. Overflows are held as 0xFF. This register is cleared by setting bit 6 of the Control register (CLR_NS_EVNT). |
| 26.7 - 26.0 | NSE_ATTACK | 0xF4, RW | Noise Attack: Sets the attack characteristics of the noise algorithm. The high nibble sets the number of noise events needed to raise the NOISE_LEVEL immediately, while the low nibble is the number of noise events needed to raise the NOISE_LEVEL at the end of an 870 msec period. |

Aid Address Register - Register 27

| Bit | Bit Name | Default | Description |
|--------------|----------|---------|--|
| 27.15 - 27.2 | Reserved | 0, RW | Reserved: These bits will always be read as 0. |
| 27.1 | DIS_LNK | 0, RW | Disable Link: This bit disables link integrity feature. |
| 27.0 | FWENA | 0, RW | Four Wire Enable: When read this bit will indicate the status of FWENA (pin 57) as read during power up. If the FWENA pin status is 1 on power up, this bit can be written to change the FWENA status. If the FWENA pin status is 0 on power up, writes to this bit are ignored. |

Aid Address Register - Register 28

| Bit | Bit Name | Default | Description |
|--------------|-------------|----------|--|
| 28.15 - 28.8 | Reserved | 0x00, RW | Reserved: These bits will always be read as 0. |
| 28.7 - 28.0 | AID_ADDRESS | 0x00, RW | AID Address: Unless bit 7 of the Control register is set, the DM9801 is assured to select a unique AID Address. Addresses above 0xEF are reserved. Address 0xFF is defined to indicate a Remote Command. |

Aid Control Register - Register 29

| Bit | Bit Name | Default | Description |
|--------------|--------------|----------|---|
| 29.15 - 29.8 | AID_ISBI | 0x40, RW | AID Inter Symbol Blanking Interval: This value defines the number of TCLKs (116.7ns) between AID pulses for symbol 0. |
| 29.7 - 29.0 | AID_INTERVAL | 0x14, RW | AID Interval: This value defines the number of TCLKs (116.7ns) separating AID symbols. |

Symbol Control Register - Register 30

| Bit | Bit Name | Default | Description |
|--------------|-----------|----------|--|
| 30.15 - 30.8 | ISBI_FAST | 0x1C, RW | Inter Symbol Blanking Interval (High Speed): This value defines the number of TCLKs (116.7ns) between data pulses for symbol 0 in High speed |
| 30.7 - 30.0 | ISBI_SLOW | 0x2C, RW | Inter Symbol Blanking Interval (Low Speed): This value defines the number of TCLKs (116.7ns) between data pulses for symbol 0 in low speed |

TX Signal Control Register - Register 31

| Bit | Bit Name | Default | Description |
|--------------|--------------|----------|---|
| 31.15 - 31.8 | TX_PLS_CYCLS | 0x44, RW | Transmit Pulse Cycles: The low nibble of this register indicates the number of pulses on the HNN pins while the high nibble indicates the number of pulses on the HNP pins. |
| 31.7 - 31.0 | TX_PLS_WIDTH | 0x04, RW | Transmit Pulse Width: This value determines the duration in OSC cycles (16.7 ns) that a transmit pulse lasts. |

SPI Serial Management Register Map (INTFSEL = 1, GPSI Mode)

| Register Address | Register Name | Access Type | Default Value | Description |
|------------------|---------------|-------------|---------------|---|
| 1-0 | CNTRL | RW | 0x0005 | Control Registers |
| 3-2 | STATUS | RW | 0x0000 | Status Registers |
| 5-4 | IMASK | RW | 0x0000 | Interrupt Mask Registers |
| 7-6 | ISTAT | RW | 0x0000 | Interrupt Status Registers |
| 9-8 | TX_PCOM_LO | RW | 0x0000 | Transmit PHY Communication Low Word |
| 11-10 | TX_PCOM_HI | RW | 0x0000 | Transmit PHY Communication High Word |
| 13-12 | RX_PCOM_LO | RW | 0x0000 | Receive PHY Communication Low Word |
| 15-14 | RX_PCOM_HI | RW | 0x0000 | Receive PHY Communication High Word |
| 19-18 | PEAK_NOISE | RW | 0xFF04 | PEAK Level and Noise Level Registers |
| 17-16 | NOISE_CNTRL_A | RW | 0x8007 | Noise Ceiling and Noise Floor Registers |
| 21-20 | NOISE_CNTRL_B | RW | 0x00F4 | Noise Events and Noise Attack Registers |
| 22 | FWENA | RW | 0x00 | Four Wire Enable and Link Disable Registers |
| 24-23 | Reserved | RW | 0x00 | Reserved |
| 25 | AID_ADDRESS | RW | 0x00 | AID Address Register |
| 27-26 | AID_CNTRL | RW | 0x4014 | AID Interval and AID ISBI Registers |
| 29-28 | SYM_CNTRL | RW | 0x1C2C | DATA ISBI Control Registers |
| 31-30 | TX_SIG_CNTRL | RW | 0x4404 | Transmit Pulse Control Registers |

SPI Serial Management Control Register - Register 0 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----|-------------|---------|---|
| 0.7 | AID_ADR_NEG | 0,RW | AID Address Negotiation: 1= Stop AID address negotiation 0= Normal operation |
| 0.6 | CLR_NS_EVNT | 0,RW | Clear Noise Event Register: 1= Clear the Noise Event Register 0= Normal operation |
| 0.5 | SLC_LVL_ADP | 0,RW | Slice Level Adaptation: 1= Slice level adaptation is disabled (stopped). 0= Slice level adaptation is enabled |
| 0.4 | PWR_DWN | 0,RW | Power Down: Writing a 1 to this bit will cause DM9801 to enter Sleep mode and power down all circuits except the oscillator and clock generator circuit. To exit Sleep mode, write 0 to this bit position. The prior configuration will be retained when the sleep state is terminated, but the state machine will be reset |
| 0.3 | Reserved | 0,RW | Reserved: This bit must be written as 0 |
| 0.2 | Speed | 1,RW | Speed: 1= high speed 0= low speed This bit indicates the network speed is set to high as selected by the status of the SPDSEL pin during power-up/reset. |
| 0.1 | POWER | 0,RW | Power: 1= high power 0= low power This bit indicates the network power is set to high as selected by the status of the PWRSEL pin during power-up/reset. |

SPI Serial Management Control Register - Register 0 (continued) (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----|----------|---------|---|
| 0.0 | Reserved | 1,RW | Reserved: This bit must be written as 1 |

SPI Serial Management Control Register - Register 1 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----|---------------|---------|---|
| 1.7 | IG_RMT_CMDS | 0,RW | Ignore Remote Commands: 1=Remote commands are ignored 0=Remote commands will be accepted from any node in the network. The value of the CMDENA pin is latched into this bit at power-up/reset. |
| 1.6 | AVG_PEAK_RL | 0,RW | Average Peak Rule: 1= Average peak with measured noise instead of noise + 25% 0= Normal operation |
| 1.5 | EN_SHORT_CD | 0,RW | Enable Short CD: 1= Enable short CD noise rule Do not count bad SYNC if CD is longer than 160uS 0= Normal operation |
| 1.4 | DIS_INC_NOISE | 0,RW | Disable Increment of Noise: 1= Disable 25% increase of noise slice when in a packet 0= Normal operation |
| 1.3 | CMD_LO_PWR | 0,RW | Command Low Power: 1= Transmit power is set to low 0= Normal operation Remote commands will be issued if this bit is set |
| 1.2 | CMD_HI_PWR | 0,RW | Command High Power: 1= Transmit power is set to high 0= Normal operation Remote commands will be issued if this bit is set |
| 1.1 | CMD_LO_SPD | 0,RW | Command Low Speed: 1= Transmit speed is set to low 0= Normal operation Remote commands will be issued if this bit is set |
| 1.0 | CMD_HI_SPD | 0,RW | Command High Speed: 1= Transmit speed is set to high 0= Normal operation Remote commands will be issued if this bit is set |

SPI Serial Management Status Register - Register 2 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----|----------|---------|--|
| 2.7 | Reserved | 0,RW | Reserved: Write as 0, ignore on read |
| 2.6 | RX_PWR | 0, RO | Receive Power: This bit is an indication of the current receive signal power. 1= The receive signal power is high. 0= The receive signal power is low. |
| 2.5 | RX_SPD | 0, RO | Receive Speed: This bit is an indication of the current receive speed. 1= The receive speed is high. 0= The receive speed is low. |

SPI Serial Management Status Register - Register 2 (continued) (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----------|----------|---------|--|
| 2.4 | RX_VER | 0, RO | Receive Version: This bit is an indication of the current receive version. 1= The receive version is not version 0. 0= The receive version is version 0. |
| 2.3 – 2.0 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |

SPI Serial Management Status Register - Register 3 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----|-------------|---------|---|
| 3.7 | INVRT_CRS | 0, RW | Invert CRS Signal: When this bit is set the CRS signal on the DM9801 will be inverted. |
| 3.6 | INVRT_COL | 0, RW | Invert COL Signal: When this bit is set the COL signal on the DM9801 will be inverted. |
| 3.5 | INVRT_TXCLK | 0, RW | Invert Transmit Clock: When this bit is set the TX_CLK signal on the DM9801 will be inverted. |
| 3.4 | INVRT_RXCLK | 0, RW | Invert Receive Clock: When this bit is set the RX_CLK signal on the DM9801 will be inverted. |
| 3.3 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |
| 3.2 | LINK_STA | 0, RO | Link Status: This bit reports the Link Status of the DM9801 |
| 3.1 | DIS_LED_STR | 0, RW | Disable LED Stretchers: This bit disables LED pulse stretchers |
| 3.0 | Reserved | 0, RW | Reserved: Write as 0, ignore on read |

IMASKA (Interrupt Mask A) Register - Register 4 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----------|--------------|---------|---|
| 4.7 – 4.4 | Reserved | 0,RW | Reserved: Write as 0, ignore on read |
| 4.3 | MSK_PKT_RCV | 0,RW | Mask Packet Received: 1= Packet Received will not activate the INT# pin 0= Packet Received will activate the INT# pin |
| 4.2 | MSK_PKT_XMIT | 0,RW | Packet Transmitted: 1= Packet Transmitted will not activate the INT# pin 0= Packet Transmitted will activate the INT# pin |
| 4.1 | MSK_RMT_RCV | 0,RW | Remote Command Received: 1= Remote Command Received will not activate the INT# pin 0= Remote Command Received will activate the INT# pin |
| 4.0 | MSK_CMD_SNT | 0,RW | Remote Command Sent: 1= Remote Command Sent will not activate the INT# pin 0= Remote Command Sent will activate the INT# pin. |

IMASKB (Interrupt Mask B) Register - Register 5 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----------|---------------------|---------|---|
| 5.7 – 5.2 | Software Interrupts | 0,RW | Software Interrupts: 1= Software interrupts will not activate the INT# pin 0= Software interrupts will activate the INT# pin |
| 5.1 | MSK_RX_PCOM | 0,RW | Mask RXPCOM Valid: 1= RX_PCOM_VAL will not activate the INT# pin 0= RX_PCOM_VAL will activate the INT# pin |
| 5.0 | MSK_TX_PCOM | 0,RW | Mask TXPCOM Ready: 1= TX_PCOM_RDY will not activate the INT# pin 0= TX_PCOM_RDY will activate the INT# pin |

ISTAT (Interrupt Status A) Register - Register 6 (INTFSEL = 1, GPSI Mode)

This register reports the state of each interrupt source regardless of the state of the IMASK Register.

| Bit | Bit Name | Default | Description |
|-----------|-------------|---------|--|
| 6.7 – 6.4 | Reserved | 0,RW | Reserved: Write as 0, ignore on read |
| 6.3 | PKT_RCVD | 0,RW | Packet Received: When set this bit indicates a packet has been received |
| 6.2 | PKT_XMITD | 0,RW | Packet Transmitted: When set this bit indicates a packet has been transmitted |
| 6.1 | RMT_CMD_RCV | 0,RW | Remote Command Received: When set this bit indicates a valid remote command has been received. |
| 6.0 | RMT_CMD_SNT | 0,RW | Remote Command Sent: When set this bit indicates a valid remote command has been sent. |

ISTAT (Interrupt Status B) Register - Register 7 (INTFSEL = 1, GPSI Mode)

This register reports the state of each interrupt source regardless of the state of the IMASK Register.

| Bit | Bit Name | Default | Description |
|-----------|---------------------|---------|---|
| 7.7 – 7.2 | Software Interrupts | 0,RW | Software Interrupts: When set any bit of those registers indicates software interrupt is on. |
| 7.1 | RX_PCOM_VAL | 0,RW | RXPCOM Valid: When set this bit indicates a non-null RX_PCOM has been received. Accessing the high byte of the RX_PCOM register clears this bit. |
| 7.0 | TX_PCOM_RDY | 0,RW | TXPCOM Ready: When set this bit indicates a non-null TX_PCOM has been loaded into the TX_PCOM register. |


TX_PCOM Low B Register - Register 8 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----------|-------------|---------|---|
| 8.7 – 8.0 | TX_PCOM_LOB | 0, RW | TX_PCOM_LOB: The 7 th through the LSB of the 32-bit transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte in TX_PCOM_HI has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

TX_PCOM Low A Register - Register 9 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-----------|-------------|---------|---|
| 9.7 – 9.0 | TX_PCOM_LOA | 0, RW | TX_PCOM_LOA: The 15 th through 8 th bits of the 32-bit transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte in TX_PCOM_HI has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

TX_PCOM High B Register - Register 10 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|--|
| 10.7 – 10.0 | TX_PCOM_HIB | 0, RW | TX_PCOM_HIB: The 23 rd through the 16 th bits transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

TX_PCOM High A Register - Register 11 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|---|
| 11.7 – 11.0 | TX_PCOM_HIA | 0, RW | TX_PCOM_HIA: The MSB of the 32-bit transmitted data field to be used for out-of-band communications between PHY management entities. The PHY will send all-0 PCOMs until the high byte has been accessed. An access of any of the four TX_PCOM bytes will clear the TX_PCOM_RDY bit in the ISTAT register. |

RX_PCOM Low B Register - Register 12 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|---|
| 12.7 – 12.0 | RX_PCOM_LOB | 0, RW | RX_PCOM_LOB: The LSB of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of the RX_PCOM_HI register will clear the RX_PCOM_VAL bit in the ISTAT register. |

RX_PCOM Low A Register - Register 13 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|--|
| 13.7 – 13.0 | RX_PCOM_LOA | 0, RW | RX_PCOM_LOA: The 15 th through the 8 th bits of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of the RX_PCOM_HI register will clear the RX_PCOM_VAL bit in the ISTAT register. |

RX_PCOM High B Register - Register 14 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|---|
| 14.7 – 14.0 | RX_PCOM_HIB | 0, RW | RX_PCOM_HIB: The 23 rd through the 16 th bits of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of this register will clear the RX_PCOM_VAL bit in the ISTAT register. |

RX_PCOM High A Register - Register 15 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|---------|--|
| 15.7 - 15.0 | RX_PCOM_HIA | 0, RW | RX_PCOM_HIA: The MSB of the 32-bit receive data field to be used for out-of-band communications between PHY management entities. A non-null receive PCOM will set the RX_PCOM_VAL bit in the ISTAT register. An access of the high byte of this register will clear the RX_PCOM_VAL bit in the ISTAT register. |

Noise Level Register - Register 16 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|----------|---|
| 16.7 - 16.0 | NOISE_LEVEL | 0x04, RW | NOISE LEVEL: This is the digital value of the SLICE_LVL_NOISE output. It is effectively a measure of the noise level on the wire. When auto-adaptation is enabled (bit 5 of the Control register is false) this register is updated with the current noise count every 50n Secs. When adaptation is disabled, this register can be written and is used to generate both the SLICE_LVL_NOISE and the SLICE_LVL_DATA signals. |

Peak Level Register - Register 17 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|------------|----------|--|
| 17.7 - 17.0 | PEAK_LEVEL | 0xFF, RW | Peak Level: This is a measurement of the peak level of the last valid (non-collision) AID received also, the maximum allowable value of the noise measurement. If NOISE_LEVEL exceeds PEAK_LEVEL, NOISE_LEVEL is reset to NOISE_FLOOR. |



Noise Floor Register - Register 18 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-----------|----------|--|
| 18.7 - 18.0 | NSE_FLOOR | 0x07, RW | Noise Floor: The minimum value of the NOISE_LEVEL measurement. |

Noise Ceiling Register - Register 19 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|----------|--|
| 19.7 - 19.0 | NSE_CEILING | 0x80, RW | Noise Ceiling: The maximum value of the NOISE_LEVEL measurement. |

Noise Attack Register - Register 20 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|------------|----------|---|
| 20.7 - 20.0 | NSE_ATTACK | 0xF4, RW | Noise Attack: Sets the attack characteristics of the noise algorithm. The high nibble sets the number of noise events needed to raise the NOISE_LEVEL immediately, while the low nibble is the number of noise events needed to raise the NOISE_LEVEL at the end of an 870 msec period. |

Noise Events Register - Register 21 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|------------|----------|--|
| 21.7 - 21.0 | NSE_EVENTS | 0x00, RW | Noise Events: An 8 bit counter that records the number of noise events detected. Overflows are held as 0xFF. This register is cleared by setting bit 6 of the Control register (CLR_NS_EVT). |

Four Wire Enable Register - Register 22 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|----------|---------|---|
| 22.7 - 22.2 | Reserved | 0, RW | Reserved These bits will always be read as 0. |
| 22.1 | DIS_LNK | 0, RW | Disable Link: This bit disables link integrity feature. |
| 22.0 | FWENA | 0, RW | Four Wire Enable: When read this bit will indicate the status of FWENA (pin 57) as read during power up. If the FWENA pin status is 1 on power up, this bit can be written to change the FWENA status. If the FWENA pin status is 0, on power up, writes to this bit are ignored. |

Aid Address Register - Register 25 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-------------|----------|---|
| 25.7 - 25.0 | AID_ADDRESS | 0x00, RW | AID Address: Unless bit 7 of the Control register is set, the DM9801 is assured to select a unique AID Address. Addresses above 0xEF are reserved. Address 0xFF is defined to indicate a Remote Command. |

Aid Interval Register - Register 26 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|--------------|----------|--|
| 26.7 - 26.0 | AID_INTERVAL | 0x14, RW | AID Interval: This value defines the number of TCLKs (116.7ns) separating AID symbols. |

Aid Inter-Symbol Blanking Interval Register - Register 27 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|----------|----------|---|
| 27.7 - 27.0 | AID_ISBI | 0x40, RW | AID Inter Symbol Blanking Interval: This value defines the number of TCLKs (116.7ns) between AID pulses for symbol 0. |

ISBI Slow Register - Register 28 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-----------|----------|--|
| 28.7 - 28.0 | ISBI_SLOW | 0x2C, RW | Inter Symbol Blanking Interval (Low Speed): This value defines the number of TCLKs (116.7ns) between DATA pulses for symbol 0 in low speed |

ISBI Fast Register - Register 29 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|-----------|----------|--|
| 29.7 - 29.0 | ISBI_FAST | 0x1C, RW | Inter Symbol Blanking Interval (High Speed): This value defines the number of TCLKs (116.7ns) between DATA pulses for symbol 0 in High speed |

TX Pulse Width Register - Register 30 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|--------------|----------|---|
| 30.7 - 30.0 | TX_PLS_WIDTH | 0x04, RW | Transmit Pulse Width: This value determines the duration in OSC cycles (16.7 ns) that a transmit pulse lasts. |

TX Pulse Cycles Register - Register 31 (INTFSEL = 1, GPSI Mode)

| Bit | Bit Name | Default | Description |
|-------------|--------------|----------|---|
| 31.7 - 31.0 | TX_PLS_CYCLS | 0x44, RW | Transmit Pulse Cycles: The low nibble of this register indicates the number of pulses on the HNN pins while the high nibble indicates the number of pulses on the HNP pins. |

1 Mbps Home Phonetline Network PHY

The integrated DM9801 transceiver is a physical layer device supporting home phonetline networking. It provides all of the PHY layer functions required to support 1 Mbps data transfers over existing residential phone wiring.

All data bits are encoded into the relative time position of a pulse with respect to the previous one. The wave-form on the wire consists of a 7.5 MHz carrier sinusoid enclosed within an exponential (bell shaped) envelope. The waveform is produced by generating four 7.5 MHz square wave cycles and passing them through an external bandpass filter.

The Home Phonetline Network PHY frame consists of a Home Phonetline Network header that replaces the normal Ethernet 64-bit preamble and delimiter. The frame header is prepended to a standard Ethernet packet starting with the destination address and ending with the CRC. Only the PHY layer and its parameters are modified from that of the standard Ethernet implementation. The Home Phonetline Network PHY layer is designed to operate with a standard Ethernet MAC layer controller implementing all the CSMA/CD protocol features.

The frame begins with a characteristic SYNC interval that delineates the beginning of a Home Phonetline Network frame followed by an Access ID (AID) which encodes 8 bits of AID and 4 bits of control word. The AID is used to detect collisions and is dynamically assigned, while the control word carries speed and power information. The AID is followed by a silence interval, then 32 bits of data reserved for PHY layer communication. These bits are accessible via internal registers and are for future use.

Data encoding consists of two symbol types: an AID symbol and a data symbol. The AID symbol is always transmitted at the same speed and encodes 2 bits that determine the pulse position (one of four) relative to the previous pulse. These bits are transmitted LSB first. The access symbol interval is fixed.

The data symbol interval is variable. The arriving bit stream is blocked into from 3-bit to 6-bit blocks according to a proprietary (RLL25) algorithm. The bits in each block are then used to encode a data symbol. Each symbol consists of a Data Inter Symbol Blanking Interval (DISBI) and then a pulse at one of 25 possible positions. The pulse position and polarity within the interval is determined by the bits in the data block. Immediately after the pulse a new symbol interval begins. During the DISBI the receiver ignores all incoming pulses to allow network reflections to die out.

Any station may be programmed to assume the role of a PHY master and remotely command, via the control word, the rest of the units on the network to change their transmit speed or power level.


Many of the framing parameters are programmable in the Home Phonetline Network PHY and will allow modifications to transmission speed center frequency as well as noise and reflection rejection algorithms.

Two default speeds are provided, low at 0.7 Mbps and high at 1 Mbps.

Home Phonetline Network PHY Medium Interface Framing

The Home Phonetline Network frame on the phone wire network consists of a header generated in the PHY prepended to an IEEE 802.3 Ethernet data packet received from the MAC layer.

When transmitting on the wire pair, the DM9801 first receives an Ethernet MAC frame from the MAC. The 8 octets of preamble and delimiter are stripped off and replaced with the Home Phonetline Network PHY header, then transmitted on the home network with the LSB of each symbol being transmitted first. During a receive operation, the reverse process is executed. When a Home Phonetline Network PHY frame is received by the DM9801, the header is stripped off and replaced with the 4 octets of preamble and delimiter of the IEEE 802.3 Ethernet MAC frame specification and then passed on to the MAC layer.

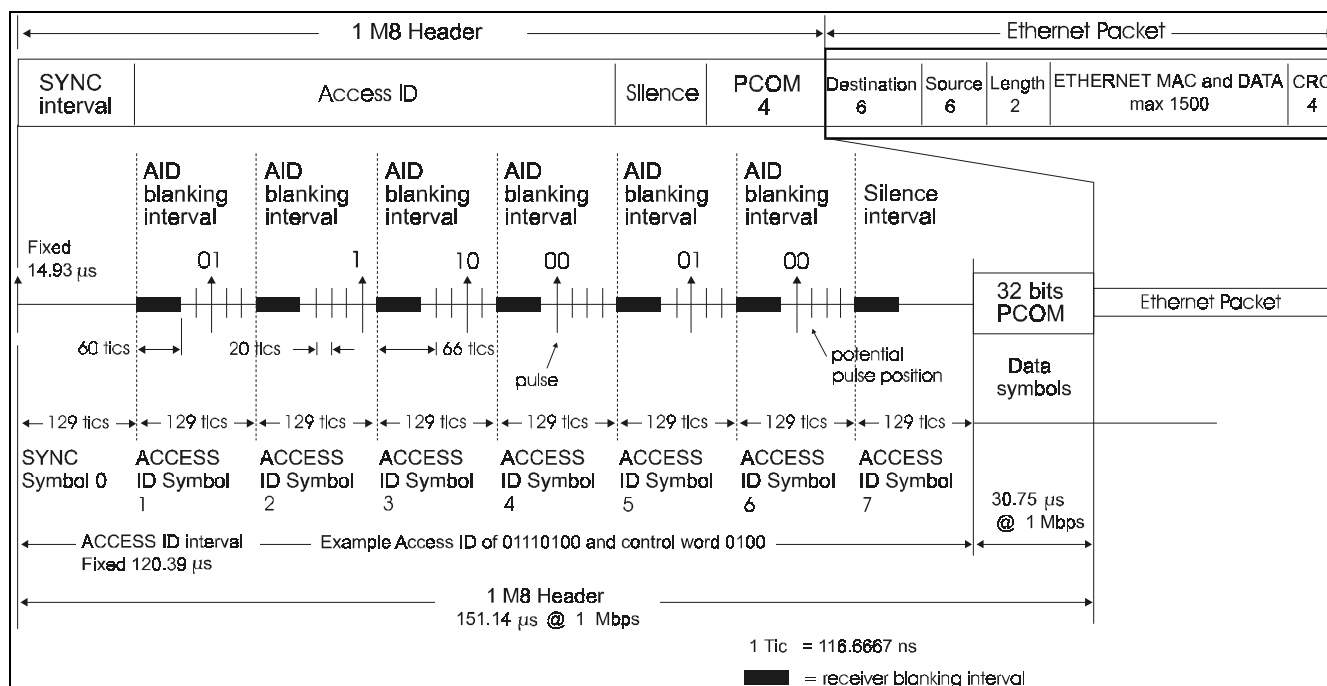

DM9801 1M Framing
Figure 21

DM9801 Symbol Waveform

All DM9801 symbols are composed at the transmitter of a silence interval and a pulse formed of an integer number of cycles (CYCLES_PER_PULSE) of a frequency square wave (CENTER_FREQUENCY) that has been filtered with a bandpass filter. Data is encoded in the same time interval from the preceding pulse.

The DM9801 pulse parameters are shown below.


| Parameter | Value | Tolerance | Unit |
|------------------|-------|-----------|-------|
| CENTER_FREQUENCY | 7.5 | 500 PPM | MHz |
| CYCLES_PER_PULSE | 4 | | Cycle |

DM9801 1M time intervals are expressed in Time Interval Clock (TIC) units. One TIC is defined as $7/(60E6)$ seconds or approximately 116.67 nano-seconds (ns).


Access ID Intervals

The DM9801 1M frame begins with an Access ID interval which is composed of eight equally spaced subintervals termed AID symbols 0 through 7. (refer to figure 21 above)

An Access ID symbol is 129 TICs long. Transmit timing is shown in figure 22 below. Timing starts at the beginning of each AID symbol and ends at TIC = 129.

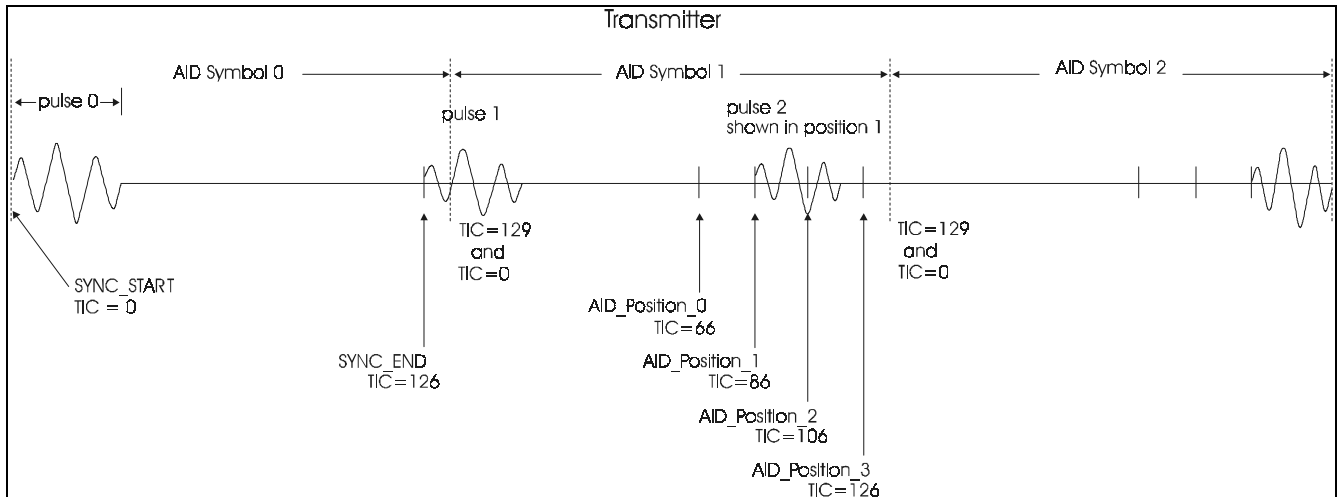

AID Symbol Transmit Timing
Figure 22

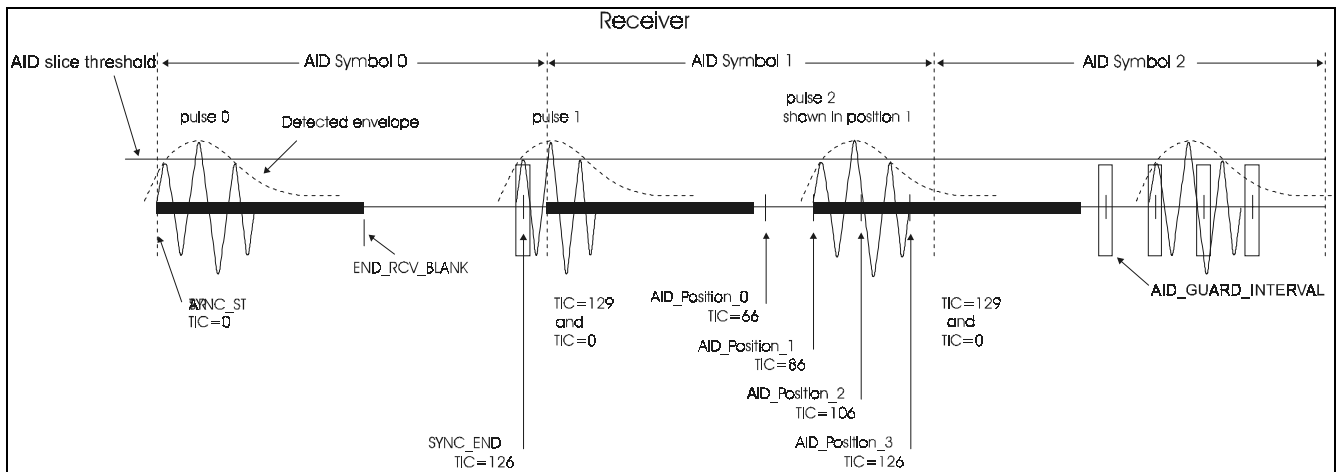

AID symbol Receive Timing
Figure 23

Sync Transmit Timing

The Sync interval (AID symbol 0) delineates the beginning of a frame and is composed of a SYNC_START pulse followed by a SYNC_END pulse after a fixed silence interval as shown in figure 22 above. Timing for this (AID symbol 0) starts (TIC = 0) at the beginning of the SYNC_START pulse. The SYNC_END pulse starts at TIC = 126.

At TIC = 129, this AID symbol 0 ends and the next AID symbol begins with the symbol timing reference reset to TIC = 0. No information bits are coded in the SYNC (AID symbol 0 interval).

Sync Receive Timing

As soon as the SYNC_START pulse is detected, the receiver disables (Blanks) further detection until AID_END_BLANK (located at TIC = 61) after which detection is re-enabled for the next received pulse. The receiver allows for jitter by establishing a window around each legal pulse position. This window AID_GUARD_INTERVAL is 2 TICS wide on either side of the position.

A SYNC_END pulse which arrives outside AID_GUARD_INTERVAL of the legal TIC = 126 is considered a NOISE_EVENT that may be used in setting the adaptive Squelch level, aborts the packet, and sets the receiver in search of a new SYNC_START pulse and SYNC interval. If it is a transmitting station, the Collision event is asserted.

The SYNC interval is followed by six Access ID symbols (symbols 1 through 6). Transmit timing is shown in figure 22 and receive timing in figure 23 (above). Data is encoded in the relative position of each pulse with respect to the previous one. A pulse may occur at one and only one of the four possible positions within the AID symbol yielding two bits of data coded per AID symbol.

The decoded bits from the AID symbols 1 to 4 produce 8 bits of Access ID which are used to identify individual stations and to detect collisions. The MSB is encoded in AID symbol 1 and is the leftmost bit in Table 2.

| Pulse Position | Tics From Beginning of AID Symbol | Bit Encoding |
|----------------|-----------------------------------|--------------|
| 1 | 66 | 00 |
| 2 | 86 | 01 |
| 3 | 106 | 10 |
| 4 | 126 | 11 |

Access ID Symbol Pulse Position and Encoding
Table 2

The next two AID symbols (5 and 6) encode four bits of control information. The MSB is encoded in AID Symbol 5.

Collisions

A Collision is detected only during Access ID and silent intervals (AID Symbols 0 through 7). In general during a collision a transmitting station will read back an AID value that does not match its own and recognizes the event as a collision alerting other stations with a Jam signal. Non-transmitting stations may also detect non-conforming AID pulses as collisions.

With two transmitters colliding, each transmitter normally blanks its receive input immediately after transmitting and simultaneously receiving a pulse. Therefore, only when a transmitting station receives pulses in a position earlier than the position it transmitted will it recognize it as a pulse transmitted by another station and signal a collision.

For this reason guaranteed collision is possible only as long as the spacing between successive possible pulse positions in an AID symbol (20 TICS or 2.3 μ s) is greater than the round trip delay between the colliding nodes. At approximately 1.5 ns propagation delay per foot, the maximum distance between two stations must not be greater than 500 feet for collision detection purposes (1.5 μ s round trip delay plus margin).

The following criteria must be met to guarantee reliable collision detection:

At least one station of a colliding group must always detect a collision when the delay between the beginning of its transmitted packet and the beginning of the received colliding packet is between -1.5 μ s and +1.5 μ s

Collisions (continued)

In general, any received pulse at a station that does not conform to the pulse position requirements of AID symbols 0 through 7 shall indicate a collision on the wire. When a transmitting station senses a collision, it emits a Jam signal to alert all other stations to the collision. The following conditions signify a collision event:

1. A station receives an AID that does not match the one being sent.
2. A station receives a pulse outside of the AID_GUARD_INTERVAL in AID intervals 0 to 7.
3. A station receives a pulse inside the SILENCE_INTERVAL (AID symbol 7).

As in all cases, pulses received inside the blanking interval are ignored.

Passive stations (stations not actively transmitting during the collision) cannot reliably detect collisions. Therefore, once a collision is detected by a transmitting station, the station must inform the rest of the stations of the collision with a Jam pattern. Only a transmitting station emits a Jam signal.

Once a collision is detected, the COLLISION signal to the MAC interface is asserted and is not reset until the MAC deactivates the TX_EN signal and CRS is inactive.

Jam Signal

A Jam pattern consists of one pulse every 32 TICs and continues until at least the end of the AID intervals. After the AID intervals, the jam pattern is continued until TX_EN from the MAC is deactivated.

Access ID Values

The Access ID values for slave stations must be picked by each individual station randomly from a set of AID slave numbers. During operation each station monitors the frames received on the wire. If it detects another station using the same AID, it must randomly select a new AID.

Silence Interval (AID Symbol 7)

The Access ID symbols are followed by a fixed SILENCE_INTERVAL on 129 TICs. The receive blanking interval is the same as that of the AID symbols (1 through 6). Any pulses detected in the SILENCE_INTERVAL are considered as Collision event and are handled as described in the Collisions section.

Data Symbols

Data symbols are less robust than Access ID symbols and do not allow collision detection. However, they encode data for a much higher transmission rate.


Data Transmit Timing

Data transmission begins with the beginning of a transmission of a pulse as shown in figure 24 below. Transmit timing in TICs is measured from this point (TIC = 0).

Depending on the data code, the next pulse may begin at any PULSE_POSITION_N, where $n = 0$ to 24. Each position is separated from the previous one by one TIC. PULSE_POSITION_0 occurs at a value defined in Table 3 below. This value determines the transmission speed. When a pulse begins transmission, the previous symbol interval ends and a new one immediately begins.

| SPEED Setting | Nominal Data Rate | PULSE_POSITION_0 Value (in TICs) |
|---------------|-------------------|----------------------------------|
| LOW_SPEED | 0.7 MB/s | 44 |
| HIGH_SPEED | 1.0 MB/s | 28 |

Blanking Interval Speed Settings
Table 3

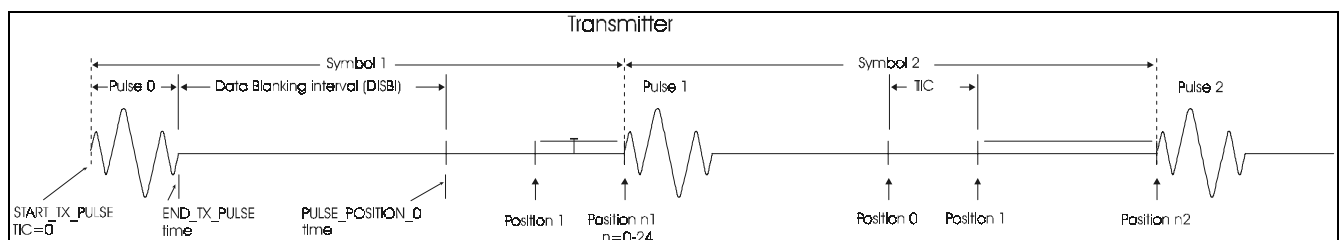


Transmit Data Symbol Timing
Figure 24

Data Receive Timing

The incoming waveform is formed from the transmitted pulse along with any distortions and reflections that occur in the wiring network. The receiver detects the point at which the envelope of the received waveform crosses a set threshold as described in the Receiver Functions section.

Immediately after the receive threshold crossing, the receiver disables any further detection for a period of $\text{END_DATA_BLANK} = \text{PULSE_POSITION_0} - (\text{minus}) 3 \text{ TICs}$, starting with the detection of the pulse peak.

The receiver is then re-enabled for pulse detection and, upon reception of the next pulse measures the elapsed time (RX_PULSE_INTERVAL) from the previous pulse. The value is then placed in the nearest pulse position bin (one of 25), where pulse position 0 is at PULSE_POSITION_0 , and each subsequent position is spaced 1 TIC from the previous one as defined in the Data Transmit Timing section. Data symbols are therefore variable and depend on the encoded data.

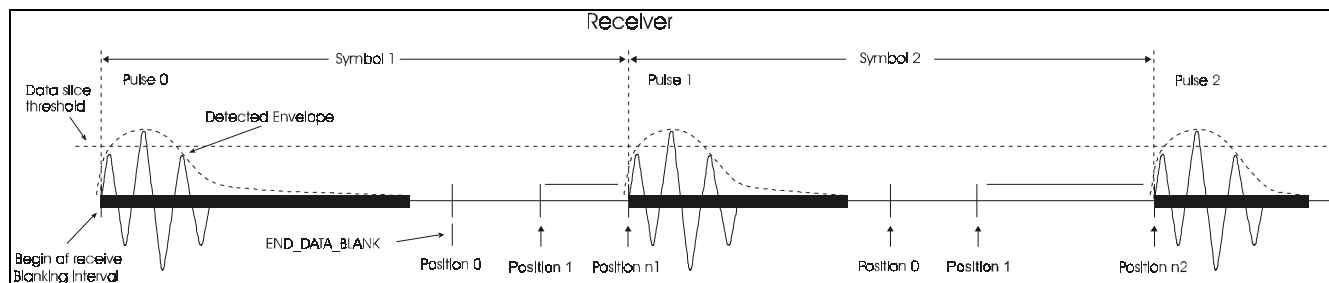

Receive Symbol Timing
Figure 25

Data Symbol RLL25 Encoding


The Run Length Limit (RLL25) code was developed for the Home Networking PHY. It produces highest bit rate for a given value of ISBI (Inter-Symbol Blanking Interval) and TIC size. In a manner similar to run length limited disk coding, RLL27 encodes data bits in groups of various sizes, specifically, 3, 4, 5, and 6 bits. Pulse positions are assigned to the encoded bit groups in a manner that causes more data bits to be encoded in positions that are farther apart. This keeps both the average and minimum bit rates higher.

RLL25 codes data by traversing a tree as shown in figure 26 below. Assuming that successive data bits to be encoded are labeled A, B, C, D..., etc. The encoding process begins at the root node and proceeds as follows:

- If the first bit (bit A) is a one, the next 3 bits (B, C, and D) select which one of the eight positions (1-8) is transmitted. The encoding process then continues at the root node.

- If bit A is a zero and bit B is a one, the next 3 bits (C, D, and E) select which one of eight positions (9-16) is transmitted. The encoding process then continues at the root node.
- If bit A is a zero, bit B is a zero, and bit C is a one, the next 3 bits (D, E, and F) select which one of eight positions (17-24) is transmitted. The encoding process then continues at the root node.
- Finally, if bits A, B, and C are all zeros, position 0 is transmitted. The encoding process then continues at the root node.

As a result, Symbol 0 encodes the 3-bit data pattern 000, positions 1-8 encode the 4-bit data pattern 1BCD, positions 9-16 encode the 5-bit data pattern 01CDE, and positions 17-24 encode the 6-bit data pattern 001DEF. If the data encoded is random, 50% of the positions used will be for 4-bit data patterns, 25% will be for 5-bit data patterns, 12.5% will be for 6-bit data patterns, and 12.5% will be for 3-bit data patterns.

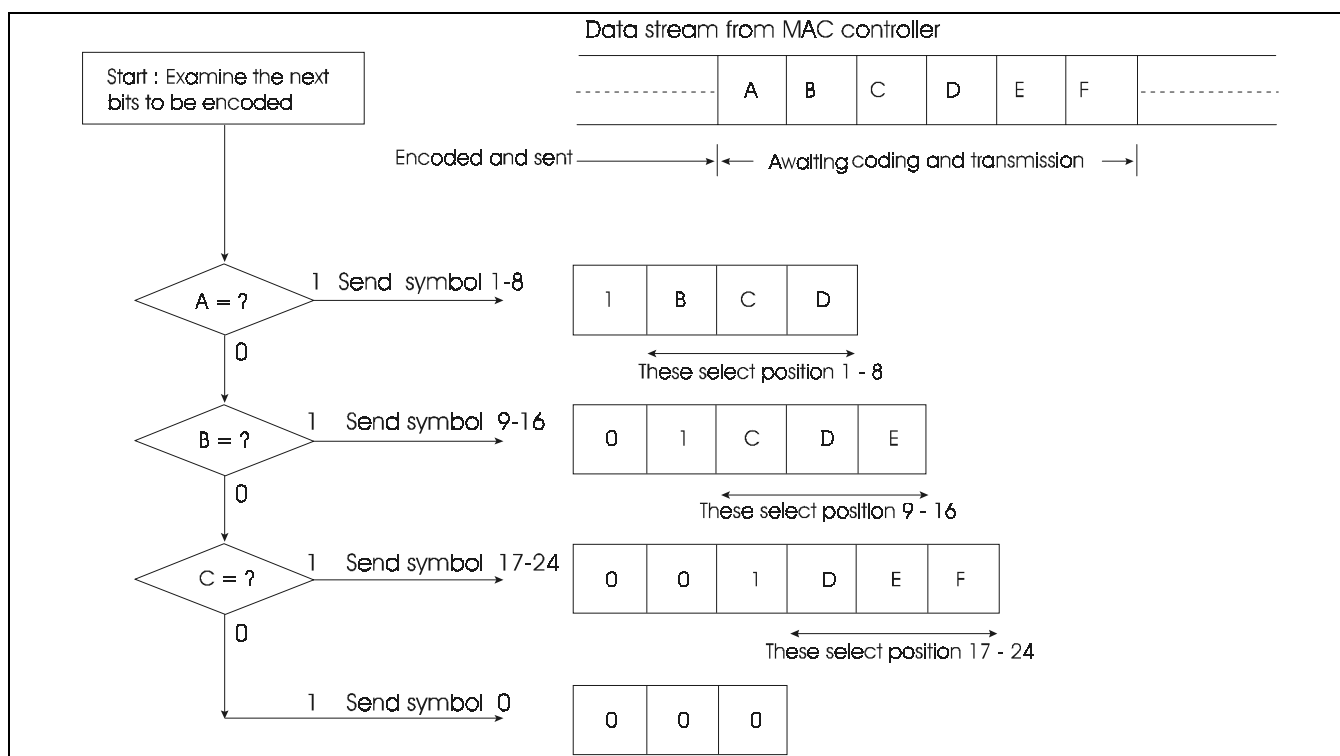

RLL 25 Coding Tree
Figure 26

Management Interfaces

The DM9801 may be managed from either of two interfaces with managed parameters varying depending on the interface:

1. Remote control-word management commands embedded in the AID header on the wire network.
2. Management messages from the local management entity.

AID Header Remote Control-Word Commands

Home Phonenumber Networking stations may be configured either as master stations or slave stations. Only one master may exist on a given Home Phonenumber Network over which the header is preserved. Operation is master station mode is optional while operation is slave mode is a requirement.

The master station may send commands embedded in the header control word to remotely set various parameters of the remote slave stations. Stations are identified via the AID as follows:

1. The master station is identified on the Home Phonenumber Network with an AID of 0xFF (hex).
2. The slave is identified with an AID of 0x00 (hex) to 0xEF (hex).
3. AID values of 0xF0 to 0xFE are reserved for future use.

Once a command has been transmitted, the master station

must revert to a slave AID so that subsequent control words are not interpreted by the slave stations as new commands.

A master remote command must consist of three frames with an AID header of 0xFF (hex). Since the header is appended (piggy-backed) to packets received from the MAC that are normally transmitted independently of the DM9801, master control frames are transmitted only when the MAC sends packets to the DM9801. Therefore, packets from the master station may be separated by long intervals during which other (slave) stations may transmit their frames.

A remote master Control-Word command must be recognized and executed by a Home Phonenumber Networking PHY when it receives three consecutive valid frames with an AID of 0xFF (hex). Valid commands are as follows:

1. SET_VERSION - Commands slave devices to operate according to 1M Home Networking version.
2. SET_POWER - commands slave stations to set their transmit level to a prescribed level until another master command is received.
3. SET_SPEED - commands slave stations to set their transmit speed to a prescribed value until another master command is received.

The control word bit encoding and possible values are described in Table 4 below.

| Bit # | Indicated Status |
|-------|---|
| 0 | 0 = This station is version 0 1 = This station is not version 0 |
| 1 | 0 = Frame transmitted at low power 1 = Frame transmitted at high power |
| 2 | 0 = Frame transmitted at low speed 1 = Frame transmitted at high speed |
| 3 | Reserved |

Master/Slave Station Control Word Functions

Table 4

Note: Master and Slave control word bit encoding are identical.

**Absolute Maximum Ratings*** (25°C)

| Symbol | Parameter | Min. | Max. | Unit | Conditions |
|-----------|-------------------------------------|------|------|------|------------|
| DVCC,AVCC | Supply Voltage | -0.3 | 3.6 | V | |
| VIN | DC Input Voltage (VIN) | -0.5 | 5.5 | V | |
| VOUT | DC Output Voltage(VOUT) | -0.3 | 3.6 | V | |
| Tstg | Storage Temperature Rang (Tstg) | -65 | +150 | °C | |
| PD | Power Dissipation (PD) | --- | 0.43 | W | Vcc= 3.3V |
| LT | Lead Temp. (TL, Soldering, 10 sec.) | --- | 240 | °C | |
| ESD | ESD rating (Rzap=1.5K,Czap=100pF) | --- | 2000 | V | |

Comments

Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those

indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Power Consumption:


| Symbol | Parameter | Min. | Max. | Unit | Conditions |
|--------|-----------------------|------|------|------|------------|
| PD | High Power, 2 drivers | | 125 | mA | 3.3V |
| | High Power, 1 driver | | 75 | mA | 3.3V |
| | Low Power, 2 drivers | | 75 | mA | 3.3V |
| | Low Power, 1 driver | | 50 | mA | 3.3V |

DC Electrical Characteristics (VCC = 3.3Vdc, ±5%, Case Temp. = 0 to 85°C, unless specified otherwise)

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|-----------------------------|---------------------|------|------|------|------|--------------|
| TTL Inputs | | | | | | |
| VIL | Input Low Voltage | | | 0.8 | V | IIL = -400uA |
| VIH | Input High Voltage | 2.0 | | | V | IiH = 100uA |
| IIL | Input Low Current | | | 10 | uA | VIN = 0.4V |
| IiH | Input High Current | | | -10 | uA | VIN = 2.7V |
| MII/GPSI TTL Outputs | | | | | | |
| VOL | Output Low Voltage | | | 0.4 | V | IOL = 4mA |
| VOH | Output High Voltage | 2.4 | | | V | IOH = -4mA |
| LED Outputs | | | | | | |
| VOL | Output Low Voltage | | | 0.4 | V | IOL = 1mA |
| VOH | Output High Voltage | 2.4 | | | V | IOH = -0.1mA |


AC Electrical Characteristics (Over full range of operating condition unless specified otherwise)

Analog Transmitter Timing Diagram

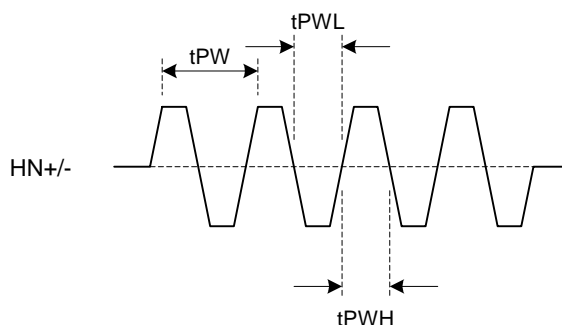


| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|---|--------------------------------|--------|------|-------|------|------------|
| Transmitter (Analog) | | | | | | |
| tPW | Pulse Width | | 133 | | ns | |
| tPWH | Pulse Width High | | 67 | | ns | |
| tPWL | Pulse Width Low | | 67 | | ns | |
| tPWH | OSC Pulse Width High | | 25 | | ns | |
| tPWL | OSC Pulse Width Low | | 25 | | ns | |
| MII (Media-Independent Interface) Clock Timing | | | | | | |
| Idle (excluding IFG time) | | | | | | |
| tPWH | TX_CLK/RX_CLK Pulse Width High | 1168 | | | ns | |
| tPWL | TX_CLK/RX_CLK Pulse Width Low | 1165 | | | ns | |
| Preamble (first 64 bits of TX MAC frame) | | | | | | |
| tTPWH | TX_CLK Pulse Width High | 468 | | | ns | |
| tTPWL | TX_CLK Pulse Width Low | 466 | | | ns | |
| tRPWH | RX_CLK Pulse Width High | - | | | ns | |
| tRPWL | RX_CLK Pulse Width Low | - | | | ns | |
| Data (throughout the data phase) | | | | | | |
| tPWH | TX_CLK/RX_CLK Pulse Width High | 468 ns | 3us | 5.6us | | |
| tPWL | TX_CLK/RX_CLK Pulse Width Low | 466 ns | 3us | 23us | | |
| IFG (88 bit times following CRS falling edge) | | | | | | |
| tPWH | TX_CLK/RX_CLK Pulse Width High | 468 | | | ns | |
| tPWL | TX_CLK/RX_CLK Pulse Width Low | 466 | | | ns | |

Notes: 1) During AID interval, RX_CLK and TX_CLK stop for up to 140 us.
2) During Preamble state, RX_CLK stays at Low.

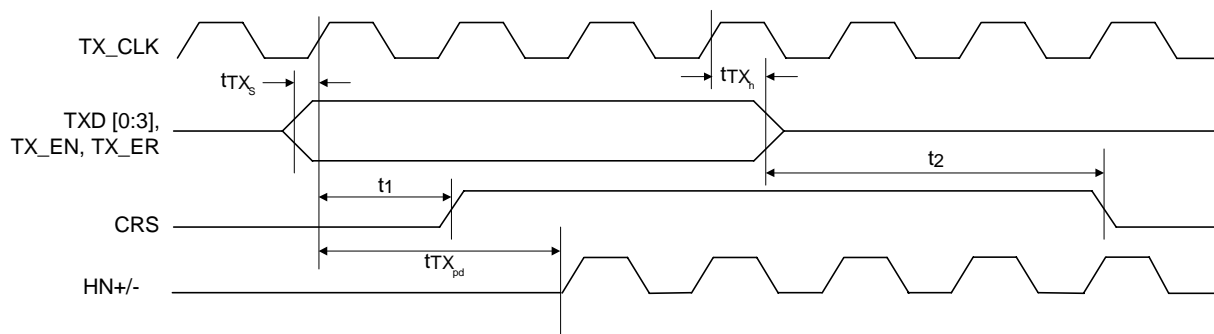MII-1M Nibble Transmit Timing Diagram

MII-1M Nibble Transmit Timing Parameters
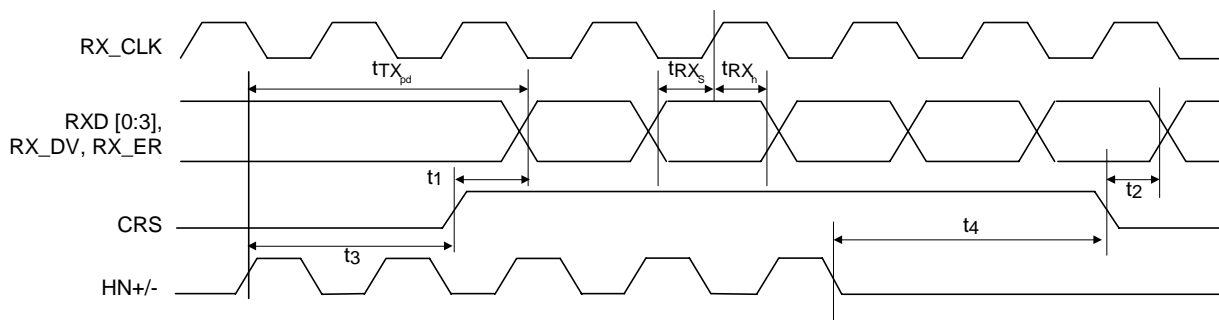
| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|---------------|--|------|------|------|------|------------|
| t_{TX_s} | TXD[0:3], TX_EN, TX_ER Setup To TX_CLK High | 10 | | | ns | |
| t_{TX_h} | TXD[0:3], TX_EN, TX_ER Hold From TX_CLK High | 10 | | | ns | |
| t_1 | TX_EN Sampled To CRS Asserted | | | 1.3 | us | |
| t_2 | TX_EN Sampled To CRS De-asserted | | | 36.1 | us | |
| $t_{TX_{pd}}$ | TX_EN Sampled To HN+/- Out (Tx Latency) | | | 1.3 | us | |

MII-1M Receive Nibble Timing Diagram


MII-1M Receive Nibble Timing Parameters


| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|-------------------|--|------|------|------|------|------------|
| tRX _s | RXD[0:3], RX_DV, RX_ER Setup To RX_CLK High | 10 | | | ns | |
| tRX _h | RXD[0:3], RX_DV, RX_ER Hold From RX_CLK High | 10 | | | ns | |
| tRX _{pd} | HN+/- In To RXD[0:3] Out (Rx Latency) | | | 154 | us | |
| t1 | CRS Asserted To RXD[0:3], RX_DV, RX_ER | | | 153 | us | |
| t2 | CRS De-asserted To RXD[0:3], RX_DV, RX_ER | | | 0 | ns | |
| t3 | HN+/- In To CRS Asserted | | | 474 | ns | |
| t4 | HN+/- Quiet To CRS De-asserted | | | 20.1 | us | |

GPSI-1M Clock Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|--|--------------------------------|----------|------|---------|------|------------|
| GPSI (General Purpose Serial Interface) | | | | | | |
| Idle (excluding IFG time) | | | | | | |
| tPWH | STDCLK/SRDCLK Pulse Width High | 468 | | | ns | |
| tPWL | STDCLK/SRDCLK Pulse Width Low | 115.3 | | | ns | |
| Preamble (first 64 bits of TX MAC frame) | | | | | | |
| tTPWH | STDCLK Pulse Width High | 118 | | | ns | |
| tTPWL | STDCLK Pulse Width Low | 115.3 | | | ns | |
| tRPWH | SRDCLK Pulse Width High | - | | | ns | |
| tRPWL | SRDCLK Pulse Width Low | - | | | ns | |
| Data (throughout the data phase) | | | | | | |
| tPWH | STDCLK/SRDCLK Pulse Width High | 115.3 ns | | 8.17 us | | |
| tPWL | STDCLK/SRDCLK Pulse Width Low | 115.3 | | 115.3 | ns | |
| IFG (96 bit times following CRS falling edge) | | | | | | |
| tPWH | STDCLK/SRDCLK Pulse Width High | 118 | | | ns | |
| tPWL | STDCLK/SRDCLK Pulse Width Low | 115.3 | | | ns | |

Notes: 1) During AID interval, SRDCLK and STDCLK stop for up to 140 us.
2) During Preamble state, SRDCLK stays at Low.


GPSI-1M Transmit Timing Diagram

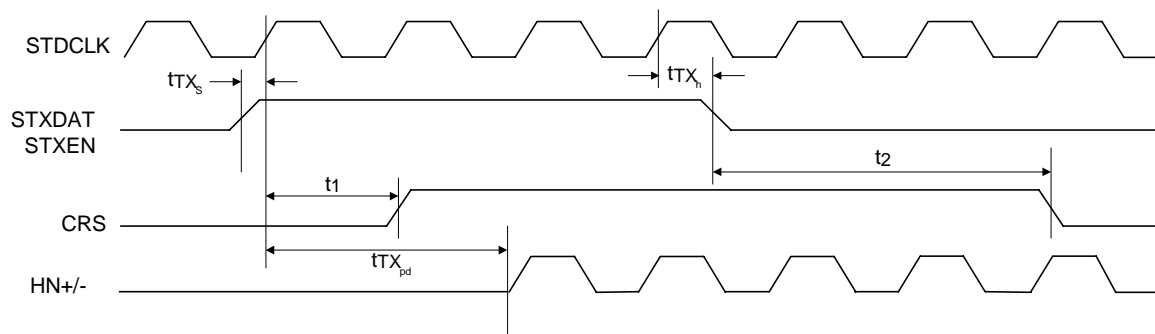

GPSI-1M Transmit Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|---------------|---|-------|------|-------|------|------------|
| t_{TX_s} | STXDAT, STXEN, Setup To STDCLK High | 10 | | | ns | |
| t_{TX_h} | STXDAT, STXEN, Hold From STDCLK High | 10 | | | ns | |
| t_1 | STXEN Sampled To CRS Asserted | | | 810 | ns | |
| t_2 | STXEN Sampled To CRS De-asserted | 33.83 | | 43.16 | us | |
| $t_{TX_{pd}}$ | STXEN Sampled To HN+/- Out (Tx Latency) | | | 819.3 | ns | |


GPSI-1M Receive Timing Diagram

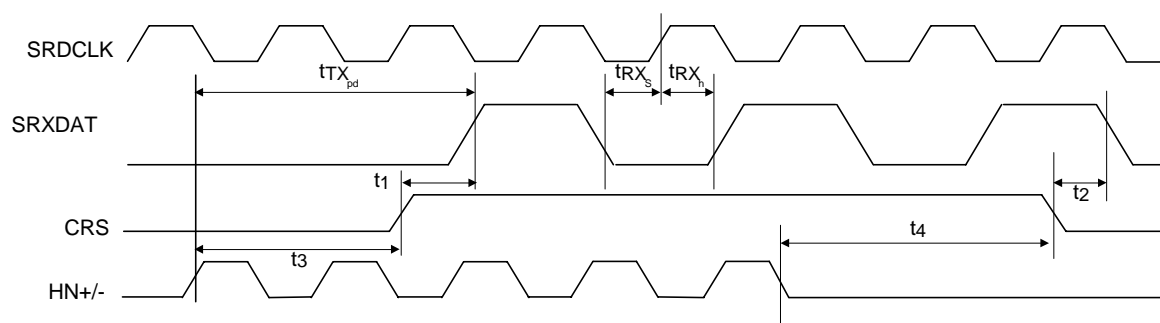


GPSI-1M Receive Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|-------------------|-------------------------------------|------|------|-------|------|------------|
| tRX _s | SRXDAT Setup To SRDCLK High | 10 | | | ns | |
| tRX _h | SRXDAT Hold From SRDCLK High | 10 | | | ns | |
| tRX _{pd} | HN+/- In To SRXDAT Out (Rx Latency) | | | 143.8 | us | |
| t1 | CRS Asserted To SRXDAT | | | 142.3 | us | |
| t2 | CRS De-asserted To SRXDAT | | | 233 | ns | |
| t3 | HN+/- In To CRS Asserted | | | 458.5 | ns | |
| t4 | HN+/- Quiet To CRS De-asserted | | | 17.7 | us | |

MDIO Timing when OUTPUT by STA

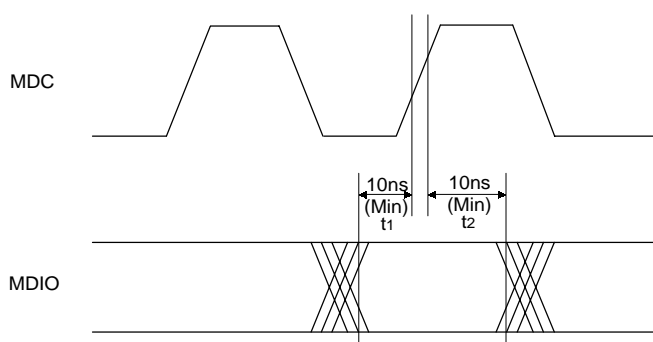


MDIO Timing when OUTPUT by DM9801

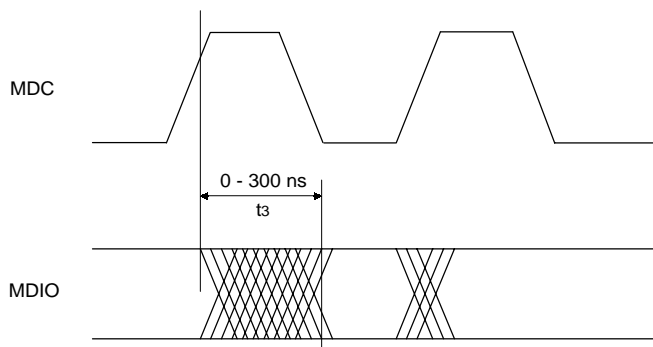

MII Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|--------|--------------------------|------|------|------|------|-----------------------|
| t1 | MDIO Setup Before MDC | 10 | - | - | ns | When OUTPUT By STA |
| t2 | MDIO Hold After MDC | 10 | - | - | ns | When OUTPUT By STA |
| t3 | MDC To MDIO Output Delay | 0 | - | 100 | ns | When OUTPUT By DM9801 |


SPI Master Mode Timing Diagram

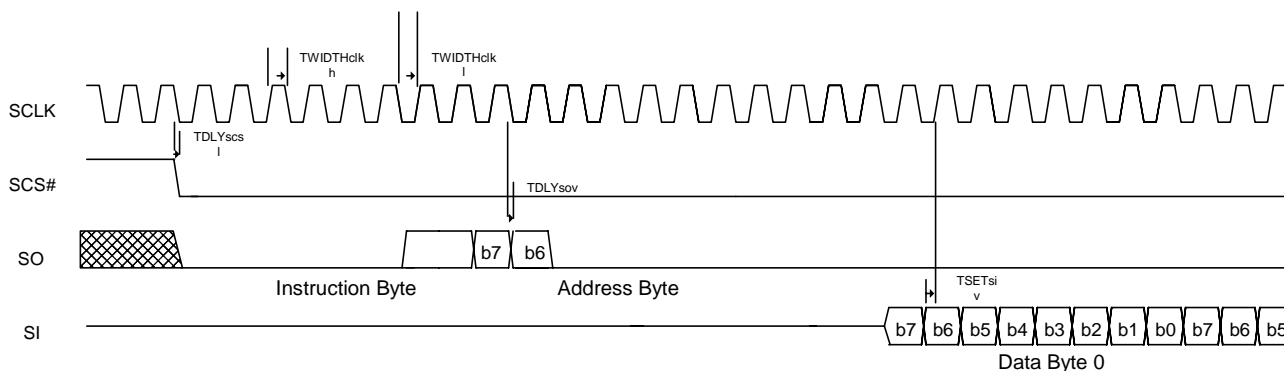

SPI Master Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|------------|---------------------------------|------|------|------|------|------------|
| TWIDTHclkh | Positive half-cycle pulse width | 790 | | 810 | ns | |
| TWIDTHclkl | Negative half-cycle pulse width | 790 | | 810 | ns | |
| TDLYscsl | Falling clock edge to SCS# low | | | 40 | ns | |
| TDLYsov | Falling clock edge to SO valid | 40 | | 60 | ns | |
| TSETsiv | SI valid to rising clock edge | 20 | | | ns | |

SPI Slave Mode Timing Diagram

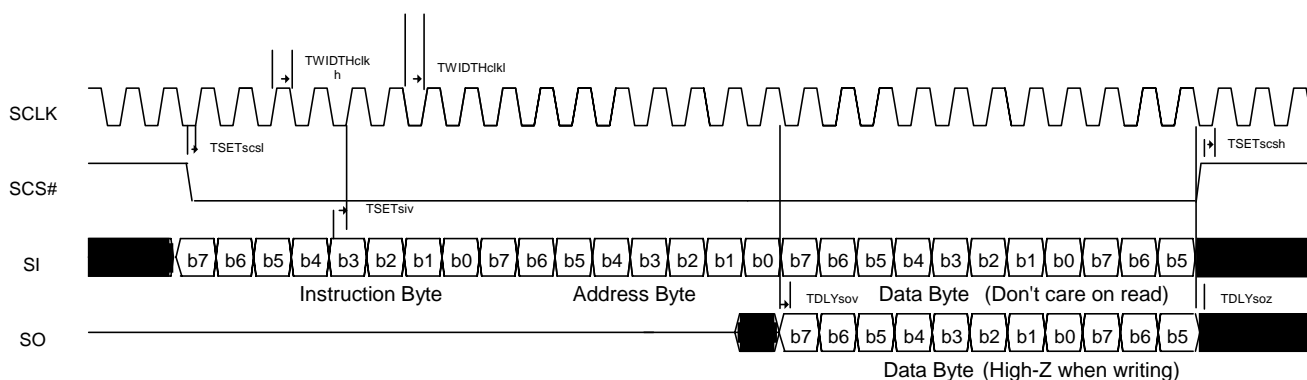

SPI Master Timing Parameters

| Symbol | Parameter | Min. | Typ. | Max. | Unit | Conditions |
|------------|------------------------------------|------|------|------|------|------------|
| TWIDTHclkh | Positive half-cycle pulse width | 400 | | | ns | |
| TWIDTHclkl | Negative half-cycle pulse width | 400 | | | ns | |
| TSETscsl | SCS# low to rising clock edge | 50 | | | ns | |
| TSETscsh | SCS# high to rising clock edge | 50 | | | ns | |
| TDLYsov | Falling edge clock to SO valid | | | 50 | ns | |
| TDLYsoz | Falling edge clock to SO tri-state | | | 100 | ns | |
| TSETsiv | SI valid to rising clock edge | 50 | | | ns | |



Magnetics Selection Guide

The DM9801 requires an external bandpass filter to interface to the telephone line.

| Manufacturer | Part Number |
|--------------|-------------|
| PULSE | B6003 |
| DELTA | LF8114 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

Table 5

Crystal Selection Guide

A crystal can be used to generate


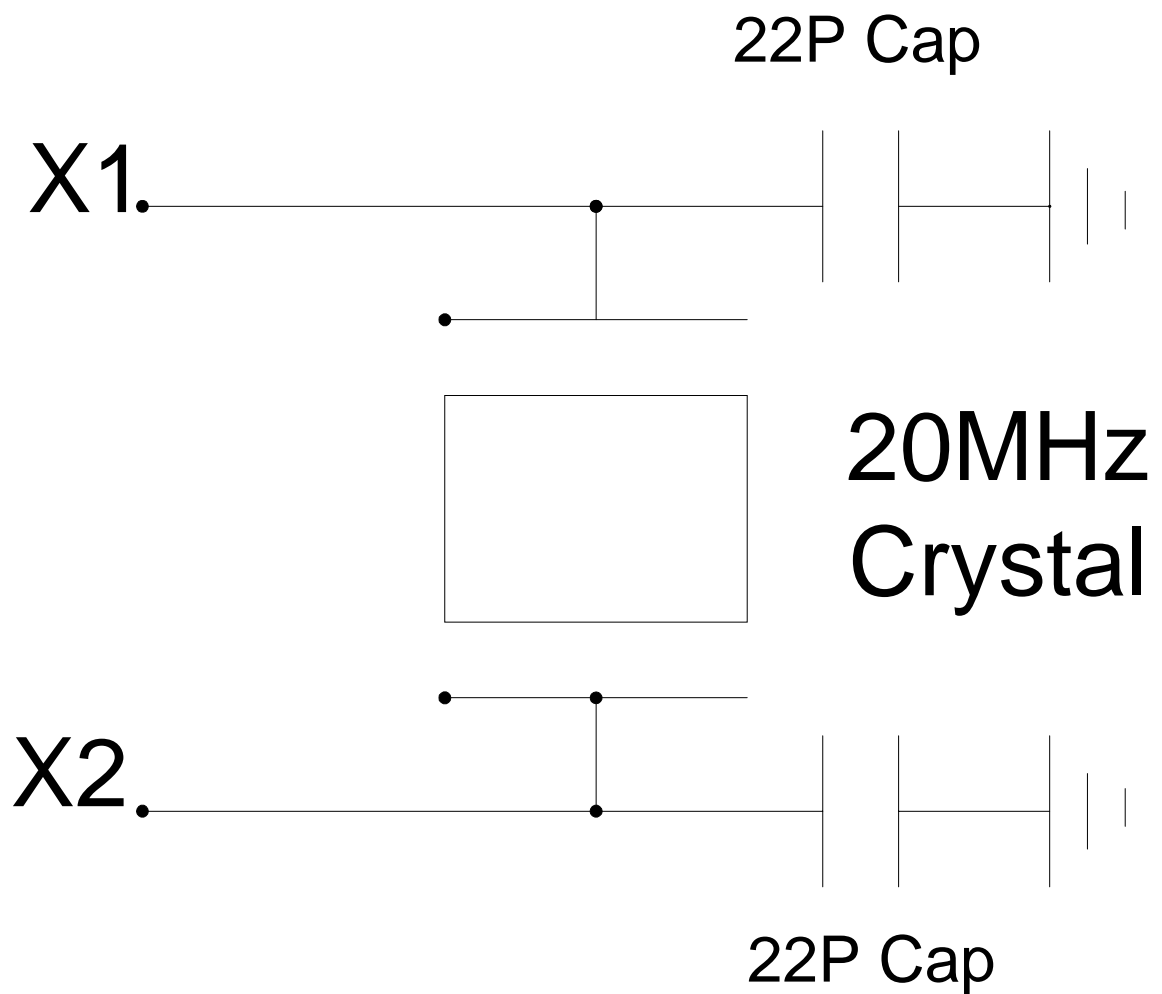


Figure 27
Crystal Circuit Diagram

Package Information

LQFP 100L Outline Dimensions

Unit: Inches/mm

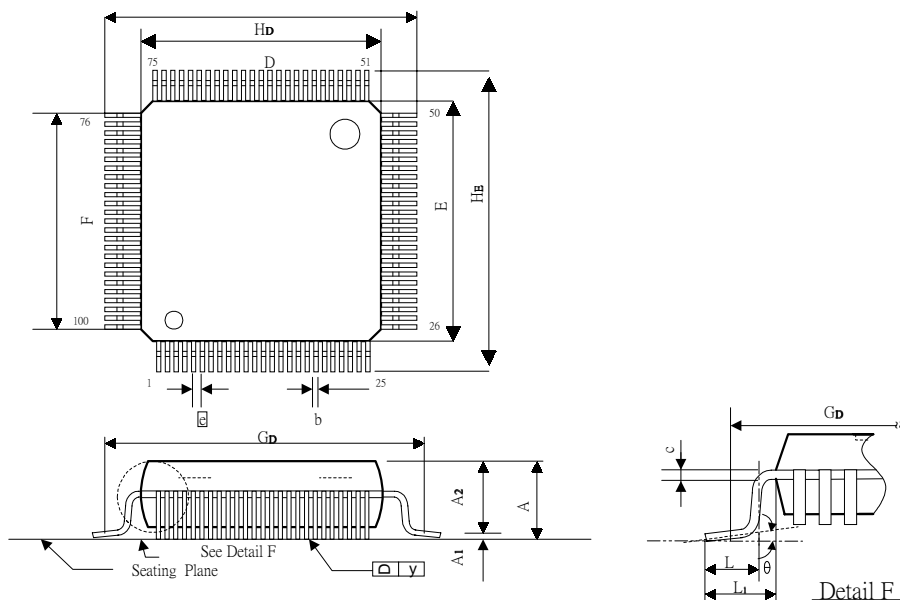

| Symbol | Dimensions In Inches | Dimensions In mm |
|----------------|----------------------|------------------|
| A | 0.063 Max. | 1.60 Max. |
| A1 | 0.004 ± 0.002 | 0.1 ± 0.05 |
| A2 | 0.055 ± 0.002 | 1.40 ± 0.05 |
| b | 0.009 ± 0.002 | 0.22 ± 0.05 |
| c | 0.006 ± 0.002 | 0.15 ± 0.05 |
| D | 0.551 ± 0.005 | 14.00 ± 0.13 |
| E | 0.551 ± 0.005 | 14.00 ± 0.13 |
| G | 0.020 BSC. | 0.50 BSC. |
| F | 0.481 NOM. | 12.22 NOM. |
| GD | 0.606 NOM. | 15.40 NOM. |
| HD | 0.630 ± 0.006 | 16.00 ± 0.15 |
| HE | 0.630 ± 0.006 | 16.00 ± 0.15 |
| L | 0.024 ± 0.006 | 0.60 ± 0.15 |
| L ₁ | 0.039 Ref. | 1.00 Ref. |
| y | 0.004 Max. | 0.1 Max. |
| θ | 0° ~ 12° | 0° ~ 12° |

Notes:

1. Dimension D & E do not include resin fins.
2. Dimension GD is for PC Board surface mount pad pitch design reference only.
3. All dimensions are based on metric system.



Ordering Information

| Part Number | Pin Count | Package |
|-------------|-----------|---------|
| DM9801E | 100 | LQFP |

DAVICOM's terms and conditions printed on the order acknowledgment govern all sales by DAVICOM. DAVICOM will not be bound by any terms inconsistent with these unless DAVICOM agrees otherwise in writing. Acceptance of the buyer's orders shall be based on these terms.

Disclaimer

The information appearing in this publication is believed to be accurate. Integrated circuits sold by DAVICOM Semiconductor are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only. DAVICOM makes no warranty, express, statutory, implied or by description regarding the information in this publication or regarding the information in this publication or regarding the freedom of the described chip(s) from patent infringement. FURTHER, DAVICOM MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. DAVICOM reserves the right to halt production or alter the specifications and prices at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders. Products described herein are intended for use in normal commercial applications. Applications involving unusual environmental or reliability requirements, e.g. military equipment or medical life support equipment, are specifically not recommended without additional processing by DAVICOM for such applications. Please note that application circuits illustrated in this document are for reference purposes only.

Company Overview

DAVICOM Semiconductor Inc. develops and manufactures integrated circuits for integration into data communication products. Our mission is to design and produce IC products that are the industry's best value for Data, Audio, Video, and Internet/Intranet applications. To achieve this goal, we have built an organization that is able to develop chipsets in response to the evolving technology requirements of our customers while still delivering products that meet their cost requirements.

Products

We offer only products that satisfy high performance requirements and which are compatible with major hardware and software standards. Our currently available and soon to be released products are based on our proprietary designs and deliver high quality, high performance chipsets that comply with modern communication standards and Ethernet networking standards.

Contact Windows

For additional information about DAVICOM products, contact the sales department at:

Headquarters

Hsin-chu Office:

3F, No. 7-2, Industry E. Rd., IX,
Science-based Park,
Hsin-chu City, Taiwan, R.O.C.
TEL: 886-3-5798797
FAX: 886-3-5798858

Taipei Sales & Marketing Office:

8F, No. 3, Lane 235, Bao-chiao Rd.,
Hsin-tien City, Taipei, Taiwan, R.O.C.
TEL: 886-2-29153030
FAX: 886-2-29157575
Email: sales@davicom.com.tw

Davicom USA

Sunnyvale, California

1135 Kern Ave., Sunnyvale,
CA94086, U.S.A.
TEL: 1-408-7368600
FAX: 1-408-7368688
Email: sales@davicom8.com

WARNING

Conditions beyond those listed for the absolute maximum may destroy or damage the products. In addition, conditions for sustained periods at near the limits of the operating ranges will stress and may temporarily (and permanently) affect and damage structure, performance and/or function.