

21A, 1200V, NPT Series N-Channel IGBTs with Anti-Parallel Hyperfast Diodes

The HGTG5N120BND and HGTP5N120BND are Non-Punch Through (NPT) IGBT designs. They are new members of the MOS gated high voltage switching IGBT family. IGBTs combine the best features of MOSFETs and bipolar transistors. This device has the high input impedance of a MOSFET and the low on-state conduction loss of a bipolar transistor. The IGBT used is the development type TA49308. The Diode used is the development type TA49058 (Part number RHRD6120).

The IGBT is ideal for many high voltage switching applications operating at moderate frequencies where low conduction losses are essential, such as: AC and DC motor controls, power supplies and drivers for solenoids, relays and contactors.


Formerly Developmental Type TA49306.

Ordering Information

PART NUMBER	PACKAGE	BRAND
HGTG5N120BND	TO-247	5N120BND
HGTP5N120BND	TO-220AB	5N120BND

NOTE: When ordering, use the entire part number. i.e., HGTG5N120BND.

Symbol




Features

- 21A, 1200V, $T_C = 25^\circ\text{C}$
- 1200V Switching SOA Capability
- Typical Fall Time 175ns at $T_J = 150^\circ\text{C}$
- Short Circuit Rating
- Low Conduction Loss
- *Thermal Impedance SPICE Model*
Temperature Compensating SABER™ Model
www.fairchildsemi.com
- Related Literature
 - TB334 "Guidelines for Soldering Surface Mount Components to PC Boards"

Packaging

JEDEC STYLE TO-247

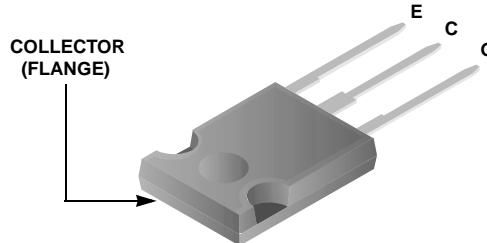

JEDEC TO-220AB (ALTERNATE VERSION)



FAIRCHILD SEMICONDUCTOR IGBT PRODUCT IS COVERED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS

4,364,073	4,417,385	4,430,792	4,443,931	4,466,176	4,516,143	4,532,534	4,587,713
4,598,461	4,605,948	4,620,211	4,631,564	4,639,754	4,639,762	4,641,162	4,644,637
4,682,195	4,684,413	4,694,313	4,717,679	4,743,952	4,783,690	4,794,432	4,801,986
4,803,533	4,809,045	4,809,047	4,810,665	4,823,176	4,837,606	4,860,080	4,883,767
4,888,627	4,890,143	4,901,127	4,904,609	4,933,740	4,963,951	4,969,027	

HGTG5N120BND, HGTP5N120BND

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, Unless Otherwise Specified

		HGTG5N120BND	HGTP5N120BND	UNITS
Collector to Emitter Voltage	BV_{CES}	1200		V
Collector Current Continuous				
At $T_C = 25^\circ\text{C}$	I_{C25}	21		A
At $T_C = 110^\circ\text{C}$	I_{C110}	10		A
Collector Current Pulsed (Note 1)	I_{CM}	40		A
Gate to Emitter Voltage Continuous	V_{GES}	± 20		V
Gate to Emitter Voltage Pulsed	V_{GEM}	± 30		V
Switching Safe Operating Area at $T_J = 150^\circ\text{C}$ (Figure 2)	SSOA	30A at 1200V		
Power Dissipation Total at $T_C = 25^\circ\text{C}$	P_D	167		W
Power Dissipation Derating $T_C > 25^\circ\text{C}$		1.33		$\text{W}/^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to 150		$^\circ\text{C}$
Maximum Lead Temperature for Soldering				
Leads at 0.063in (1.6mm) from case for 10s	T_L	300		$^\circ\text{C}$
Package Body for 10s, see Tech Brief 334	T_{pkg}	260		$^\circ\text{C}$
Short Circuit Withstand Time (Note 2) at $V_{\text{GE}} = 15\text{V}$	t_{SC}	8		μs
Short Circuit Withstand Time (Note 2) at $V_{\text{GE}} = 12\text{V}$	t_{SC}	15		μs

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

1. Pulse width limited by maximum junction temperature.
2. $V_{\text{CE}}(\text{PK}) = 840\text{V}$, $T_J = 125^\circ\text{C}$, $R_G = 25\Omega$.

Electrical Specifications $T_C = 25^\circ\text{C}$, Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNITS
Collector to Emitter Breakdown Voltage	BV_{CES}	$I_C = 250\mu\text{A}$, $V_{\text{GE}} = 0\text{V}$		1200	-	-	V
Collector to Emitter Leakage Current	I_{CES}	$V_{\text{CE}} = 1200\text{V}$	$T_C = 25^\circ\text{C}$	-	-	250	μA
			$T_C = 125^\circ\text{C}$	-	100	-	μA
			$T_C = 150^\circ\text{C}$	-	-	1.5	mA
Collector to Emitter Saturation Voltage	$V_{\text{CE}}(\text{SAT})$	$I_C = 5\text{A}$, $V_{\text{GE}} = 15\text{V}$	$T_C = 25^\circ\text{C}$	-	2.45	2.7	V
			$T_C = 150^\circ\text{C}$	-	3.7	4.2	V
Gate to Emitter Threshold Voltage	$V_{\text{GE}}(\text{TH})$	$I_C = 45\mu\text{A}$, $V_{\text{CE}} = V_{\text{GE}}$		6.0	6.8	-	V
Gate to Emitter Leakage Current	I_{GES}	$V_{\text{GE}} = \pm 20\text{V}$		-	-	± 250	nA
Switching SOA	SSOA	$T_J = 150^\circ\text{C}$, $R_G = 25\Omega$, $V_{\text{GE}} = 15\text{V}$, $L = 5\text{mH}$, $V_{\text{CE}}(\text{PK}) = 1200\text{V}$	30	-	-	-	A
Gate to Emitter Plateau Voltage	V_{GEP}	$I_C = 5\text{A}$, $V_{\text{CE}} = 600\text{V}$		-	10.5	-	V
On-State Gate Charge	$Q_{\text{G}}(\text{ON})$	$I_C = 5\text{A}$, $V_{\text{CE}} = 600\text{V}$	$V_{\text{GE}} = 15\text{V}$	-	53	65	nC
			$V_{\text{GE}} = 20\text{V}$	-	60	72	nC
Current Turn-On Delay Time	$t_{\text{d}}(\text{ON})\text{I}$	<small>IGBT and Diode at $T_J = 25^\circ\text{C}$, $I_{\text{CE}} = 5\text{A}$, $V_{\text{CE}} = 960\text{V}$, $V_{\text{GE}} = 15\text{V}$, $R_G = 25\Omega$, $L = 5\text{mH}$, Test Circuit (Figure 20)</small>	-	22	25	ns	
Current Rise Time	t_{rl}		-	15	20	ns	
Current Turn-Off Delay Time	$t_{\text{d}}(\text{OFF})\text{I}$		-	160	180	ns	
Current Fall Time	t_{fI}		-	130	160	ns	
Turn-On Energy	E_{ON}		-	450	600	μJ	
Turn-Off Energy (Note 3)	E_{OFF}		-	390	450	μJ	

Electrical Specifications $T_C = 25^{\circ}\text{C}$, Unless Otherwise Specified **(Continued)**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Current Turn-On Delay Time	$t_{d(\text{ON})I}$	IGBT and Diode at $T_J = 150^{\circ}\text{C}$, $I_{CE} = 5\text{A}$, $V_{CE} = 960\text{V}$, $V_{GE} = 15\text{V}$, $R_G = 25\Omega$, $L = 5\text{mH}$, Test Circuit (Figure 20)	-	20	25	ns
Current Rise Time	t_{rl}		-	15	20	ns
Current Turn-Off Delay Time	$t_{d(\text{OFF})I}$		-	182	280	ns
Current Fall Time	t_{fI}		-	175	200	ns
Turn-On Energy	E_{ON}		-	1000	1300	μJ
Turn-Off Energy (Note 3)	E_{OFF}		-	560	800	μJ
Diode Forward Voltage	V_{EC}	$I_{EC} = 10\text{A}$	-	2.70	3.50	V
Diode Reverse Recovery Time	t_{rr}	$I_{EC} = 7\text{A}$, $dI_{EC}/dt = 200\text{A}/\mu\text{s}$	-	50	65	ns
		$I_{EC} = 1\text{A}$, $dI_{EC}/dt = 200\text{A}/\mu\text{s}$	-	30	40	ns
Thermal Resistance Junction To Case	$R_{\theta\text{JC}}$	IGBT	-	-	0.75	$^{\circ}\text{C}/\text{W}$
		Diode	-	-	1.75	$^{\circ}\text{C}/\text{W}$

NOTE:

3. Turn-Off Energy Loss (E_{OFF}) is defined as the integral of the instantaneous power loss starting at the trailing edge of the input pulse and ending at the point where the collector current equals zero ($I_{CE} = 0\text{A}$). All devices were tested per JEDEC Standard No. 24-1 Method for Measurement of Power Device Turn-Off Switching Loss. This test method produces the true total Turn-Off Energy Loss.

Typical Performance Curves Unless Otherwise Specified

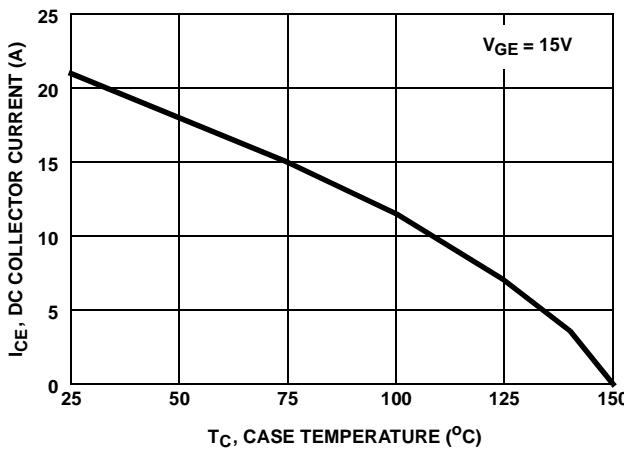


FIGURE 1. DC COLLECTOR CURRENT vs CASE TEMPERATURE

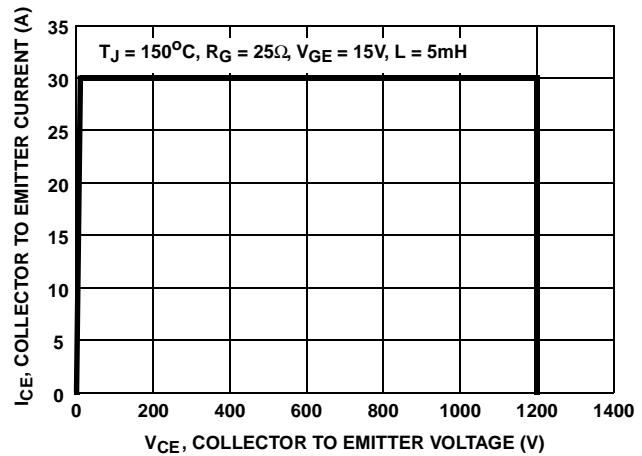


FIGURE 2. MINIMUM SWITCHING SAFE OPERATING AREA

Typical Performance Curves Unless Otherwise Specified (Continued)

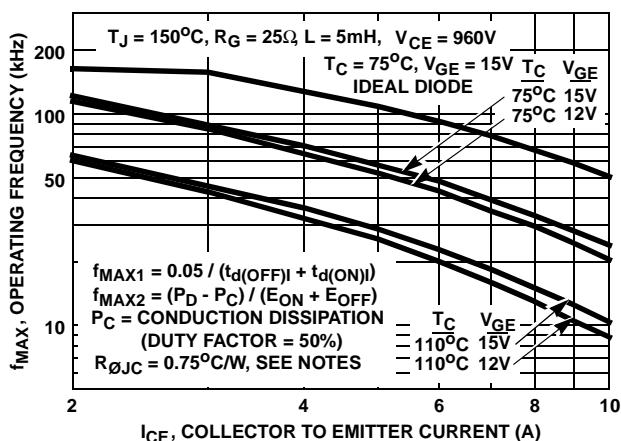


FIGURE 3. OPERATING FREQUENCY vs COLLECTOR TO Emitter CURRENT

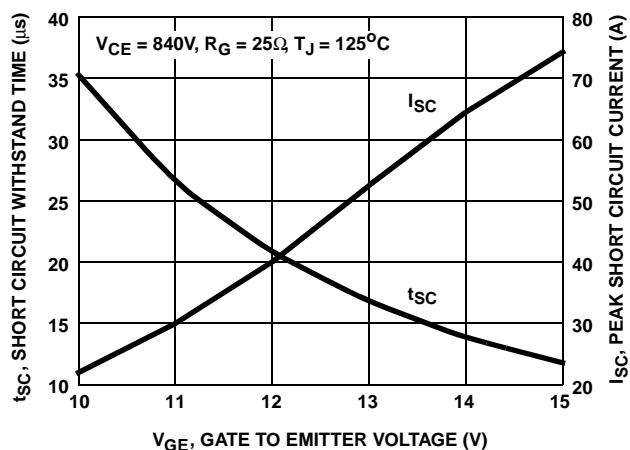


FIGURE 4. SHORT CIRCUIT WITHSTAND TIME

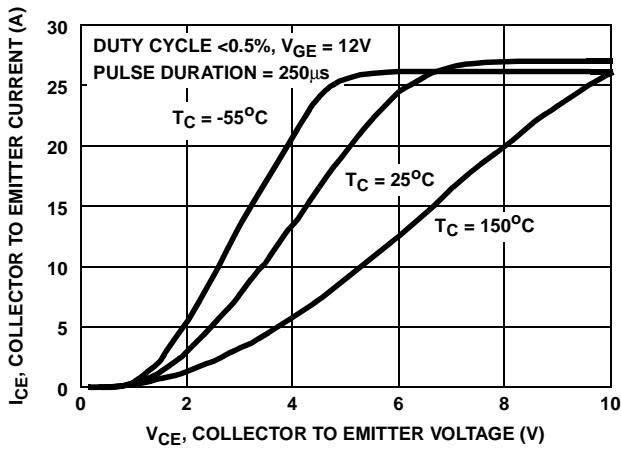


FIGURE 5. COLLECTOR TO Emitter ON-STATE VOLTAGE

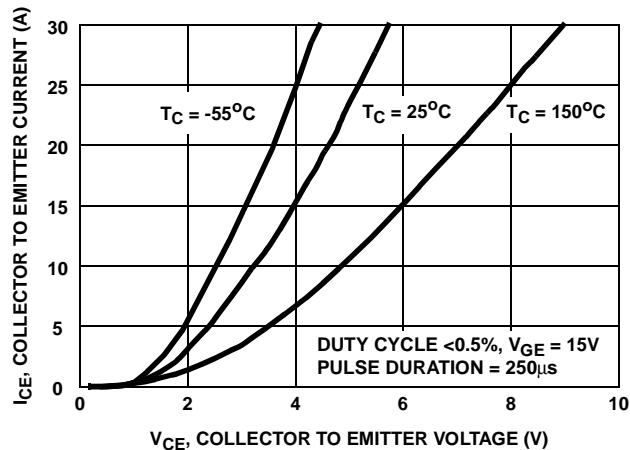


FIGURE 6. COLLECTOR TO Emitter ON-STATE VOLTAGE

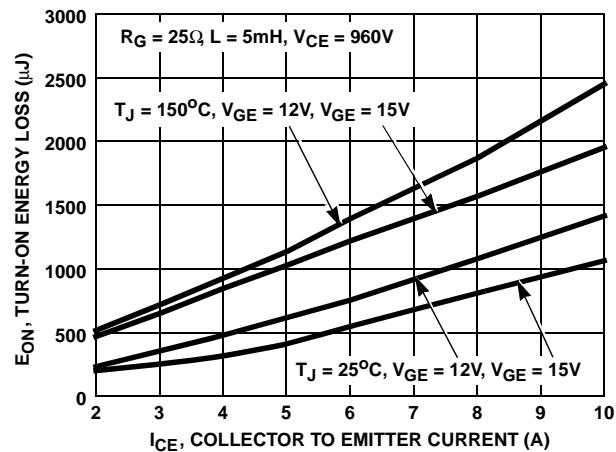


FIGURE 7. TURN-ON ENERGY LOSS vs COLLECTOR TO Emitter CURRENT

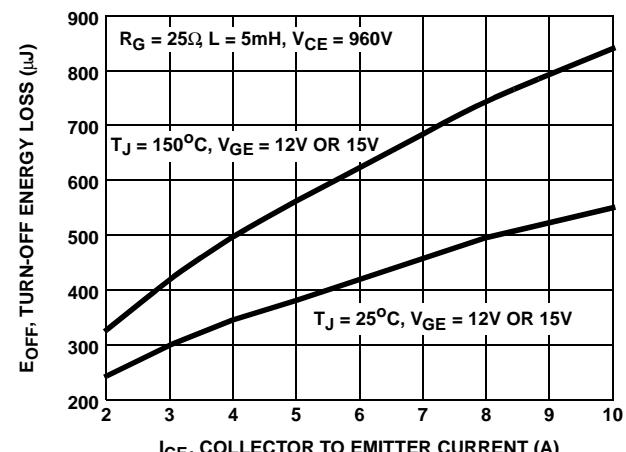


FIGURE 8. TURN-OFF ENERGY LOSS vs COLLECTOR TO Emitter CURRENT

Typical Performance Curves Unless Otherwise Specified (Continued)

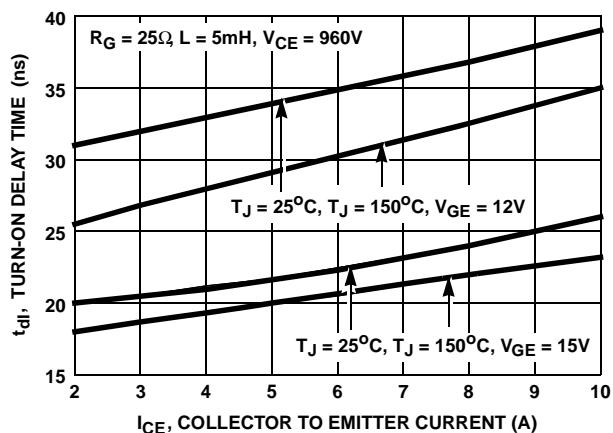


FIGURE 9. TURN-ON DELAY TIME vs COLLECTOR TO Emitter CURRENT

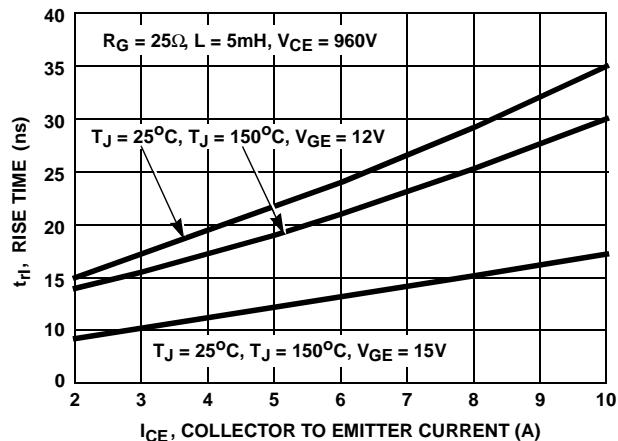


FIGURE 10. TURN-ON RISE TIME vs COLLECTOR TO Emitter CURRENT

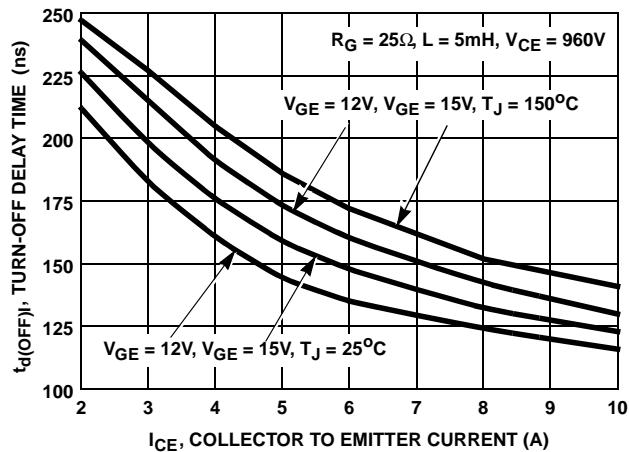


FIGURE 11. TURN-OFF DELAY TIME vs COLLECTOR TO Emitter CURRENT

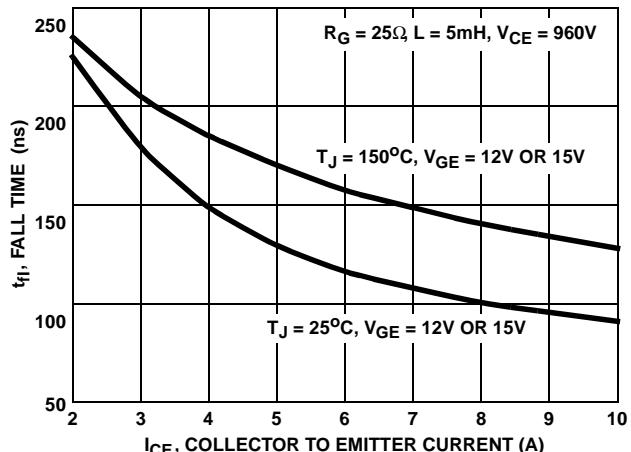


FIGURE 12. TURN-OFF FALL TIME vs COLLECTOR TO Emitter CURRENT

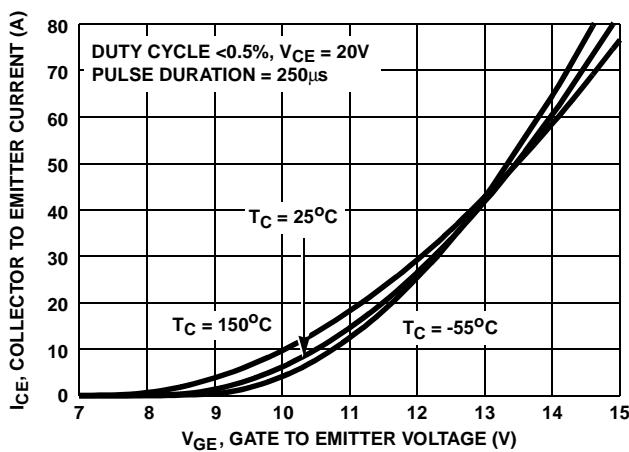


FIGURE 13. TRANSFER CHARACTERISTIC






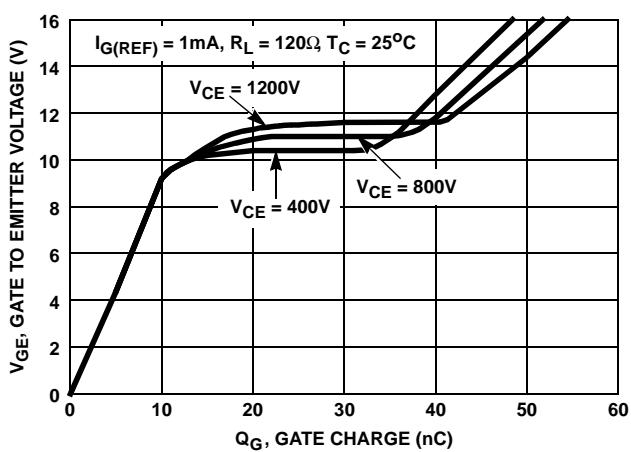


FIGURE 14. GATE CHARGE WAVEFORMS

Typical Performance Curves Unless Otherwise Specified (Continued)

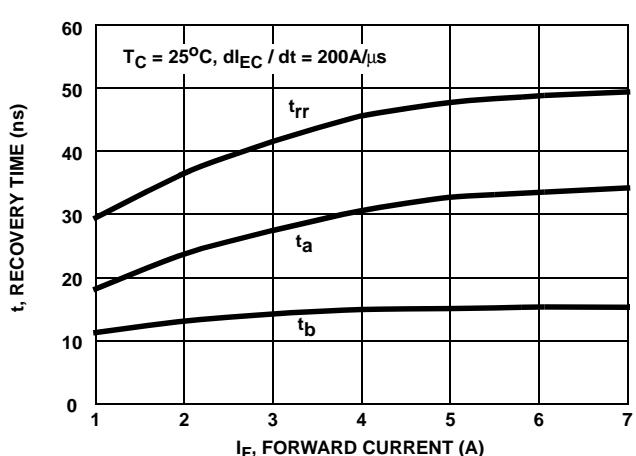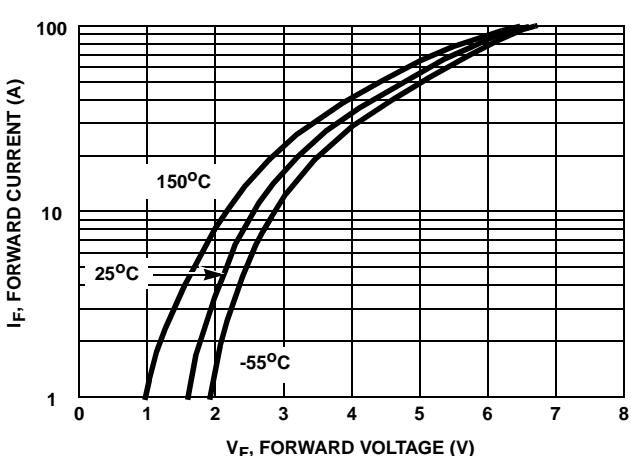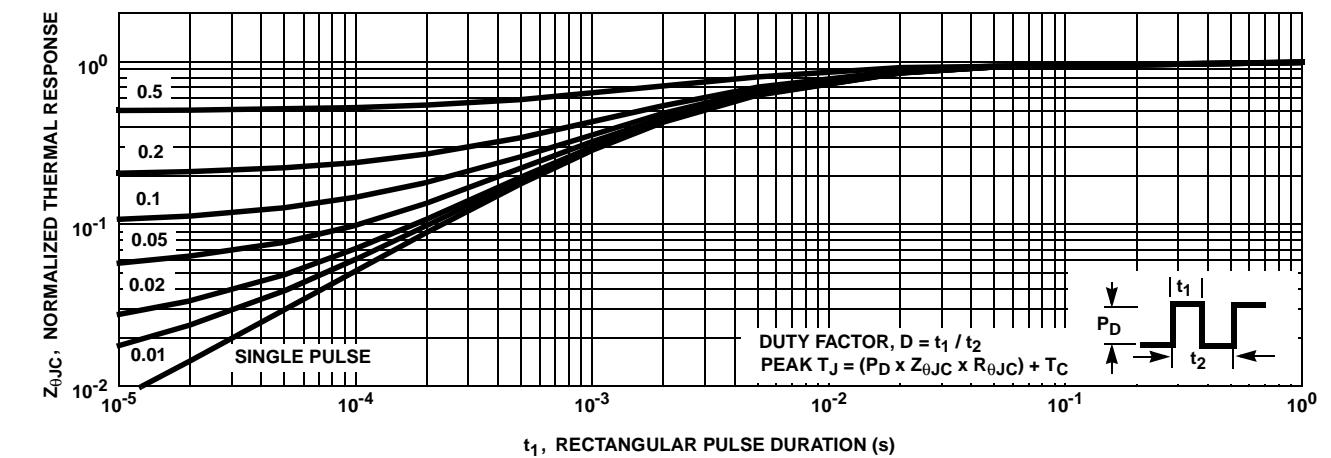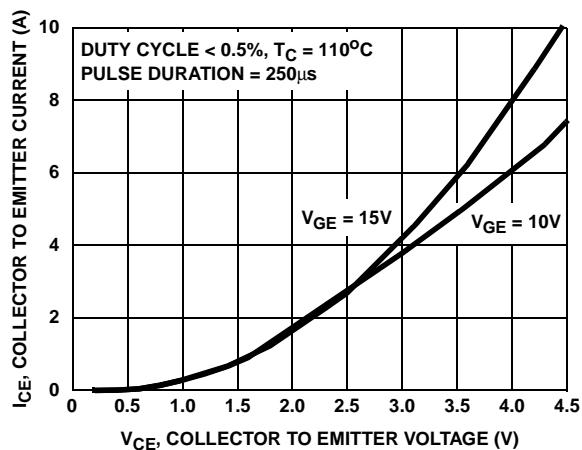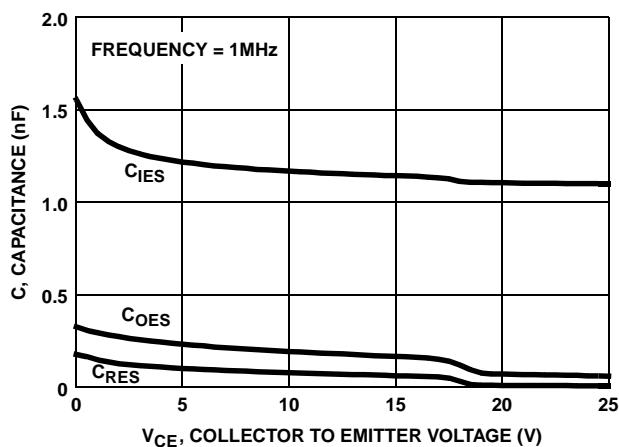

Test Circuit and Waveforms

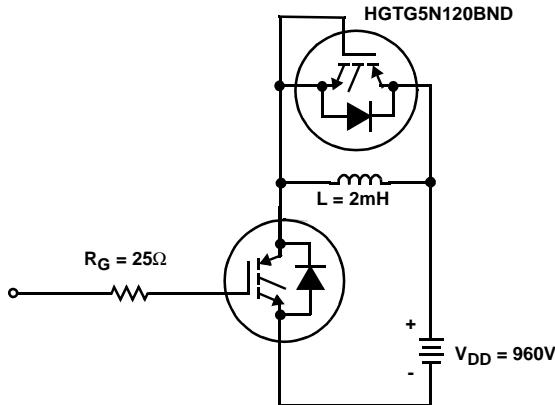


FIGURE 20. INDUCTIVE SWITCHING TEST CIRCUIT

Handling Precautions for IGBTs

Insulated Gate Bipolar Transistors are susceptible to gate-insulation damage by the electrostatic discharge of energy through the devices. When handling these devices, care should be exercised to assure that the static charge built in the handler's body capacitance is not discharged through the device. With proper handling and application procedures, however, IGBTs are currently being extensively used in production by numerous equipment manufacturers in military, industrial and consumer applications, with virtually no damage problems due to electrostatic discharge. IGBTs can be handled safely if the following basic precautions are taken:

1. Prior to assembly into a circuit, all leads should be kept shorted together either by the use of metal shorting springs or by the insertion into conductive material such as "ECCOSORBD™ LD26" or equivalent.
2. When devices are removed by hand from their carriers, the hand being used should be grounded by any suitable means - for example, with a metallic wristband.
3. Tips of soldering irons should be grounded.
4. Devices should never be inserted into or removed from circuits with power on.
5. **Gate Voltage Rating** - Never exceed the gate-voltage rating of V_{GEM} . Exceeding the rated V_{GE} can result in permanent damage to the oxide layer in the gate region.
6. **Gate Termination** - The gates of these devices are essentially capacitors. Circuits that leave the gate open-circuited or floating should be avoided. These conditions can result in turn-on of the device due to voltage buildup on the input capacitor due to leakage currents or pickup.
7. **Gate Protection** - These devices do not have an internal monolithic Zener diode from gate to emitter. If gate protection is required an external Zener is recommended.

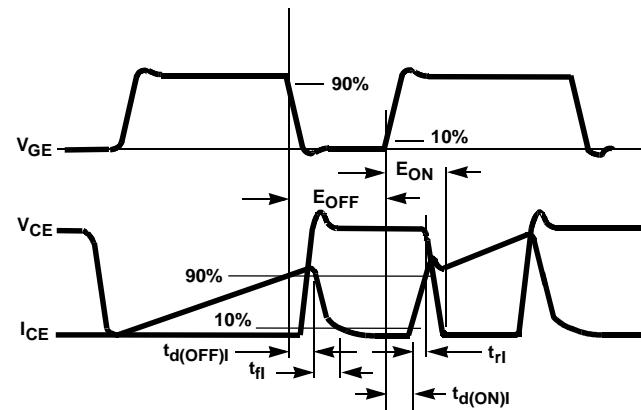


FIGURE 21. SWITCHING TEST WAVEFORMS

Operating Frequency Information

Operating frequency information for a typical device (Figure 3) is presented as a guide for estimating device performance for a specific application. Other typical frequency vs collector current (I_{CE}) plots are possible using the information shown for a typical unit in Figures 5, 6, 7, 8, 9 and 11. The operating frequency plot (Figure 3) of a typical device shows f_{MAX1} or f_{MAX2} ; whichever is smaller at each point. The information is based on measurements of a typical device and is bounded by the maximum rated junction temperature.

f_{MAX1} is defined by $f_{MAX1} = 0.05/(t_d(OFF)I + t_d(ON)I)$. Deadtime (the denominator) has been arbitrarily held to 10% of the on-state time for a 50% duty factor. Other definitions are possible. $t_d(OFF)I$ and $t_d(ON)I$ are defined in Figure 19. Device turn-off delay can establish an additional frequency limiting condition for an application other than T_{JM} . $t_d(OFF)I$ is important when controlling output ripple under a lightly loaded condition.

f_{MAX2} is defined by $f_{MAX2} = (P_D - P_C)/(E_{OFF} + E_{ON})$. The allowable dissipation (P_D) is defined by $P_D = (T_{JM} - T_C)/R_{\theta JC}$. The sum of device switching and conduction losses must not exceed P_D . A 50% duty factor was used (Figure 3) and the conduction losses (P_C) are approximated by $P_C = (V_{CE} \times I_{CE})/2$.

E_{ON} and E_{OFF} are defined in the switching waveforms shown in Figure 21. E_{ON} is the integral of the instantaneous power loss ($I_{CE} \times V_{CE}$) during turn-on and E_{OFF} is the integral of the instantaneous power loss ($I_{CE} \times V_{CE}$) during turn-off. All tail losses are included in the calculation for E_{OFF} ; i.e., the collector current equals zero ($I_{CE} = 0$).

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE TM	FACT TM	ImpliedDisconnect TM	PACMAN TM	SPM TM
ActiveArray TM	FACT Quiet Series TM	ISOPLANAR TM	POP TM	Stealth TM
Bottomless TM	FAST [®]	LittleFET TM	Power247 TM	SuperSOT ^{TM-3}
CoolFET TM	FASTr TM	MicroFET TM	PowerTrench [®]	SuperSOT ^{TM-6}
CROSSVOLT TM	FRFET TM	MicroPak TM	QFET TM	SuperSOT ^{TM-8}
DOME TM	GlobalOptoisolator TM	MICROWIRE TM	QS TM	SyncFET TM
EcoSPARK TM	GTO TM	MSX TM	QT Optoelectronics TM	TinyLogic [®]
E ² CMOS TM	HiSeC TM	MSXPro TM	Quiet Series TM	TruTranslation TM
EnSigna TM	I ² C TM	OCX TM	RapidConfigure TM	UHC TM
Across the board. Around the world. TM		OCXPro TM	RapidConnect TM	UltraFET [®]
The Power Franchise TM		OPTOLOGIC [®]	SILENT SWITCHER [®]	VCX TM
Programmable Active Droop TM		OPTOPLANAR TM	SMART START TM	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.