

# 8 Series Pushbutton Switches

## ■ Features

### 1. Contacts

Silver or gold-plated contacts.

### 2. Epoxy resin case

UL94V-0 self-extinguishing epoxy.

### 3. Actuator style

Over 30 actuator variations.

### 4. Insulation between terminal and ground: 4 mm minimum.

### 5. Prevention of flux entry

The epoxy resin seal on bottom of the switch helps prevent the entry of solder and flux.

### 6. Insulation barrier:

Insulation barrier design between poles helps prevent short-circuiting between poles ensuring high reliability.

### 7. For UL-recognized and CSA-approved products, please refer to P.280.

## ■ Specifications





Rating	Max. rating	6A 125VAC/3A 250VAC/4A 30VDC	
Initial contact resistance	10m Ωmax.	(1A 2~4VDC)	
Initial dielectric strength	1,500VAC 1 minute		
Initial insulation resistance	1,000MΩ min.	(500VDC)	
Electrical life (Excluding 8R & 8W)	Alternate type	40,000 operations	
	Momentary type	25,000 operations	
Operating temperature range	-30°C~+85°C		
Storage temperature range	-40°C~+85°C		

(Excluding 8R & 8W. Specifications on 8R and 8W series are specified separately on P.271 and P.273.)

## ■ Terminal Styles

Solder (Style:1)	Straight (Style:2)
<p>t=0.8</p>	<p>t=0.8</p>

# 8 Series Pushbutton Switches Selection Table

Part No.	Name	Actuator shape	Number of poles	Switching function	Terminal style	Page
<b>8N</b>	Standard Pushbutton		1.2.3.4	ON — ON ON — (ON)	 S/D Solder P/C Straight	<b>265</b>
<b>8P</b>	Splash Proof Pushbutton		1.2.3.4	ON — ON ON — (ON)	 S/D Solder P/C Straight	<b>267</b>
<b>8Y</b>	Mustang Pushbutton		1.2.3.4	ON — ON ON — (ON)	 S/D Solder	<b>269</b>
<b>8R-N</b>	Soft Touch Pushbutton		1.2	ON — ON ON — (ON)	 S/D Solder P/C Straight	<b>271</b>
<b>8W-N</b>	Snap-in Pushbutton		1.2	ON — (ON)	 S/D Solder P/C Straight	<b>273</b>

## Part Numbering

**8**

Series code

Actuator shape

**N**

Actuator shape

**1**

Number of poles

**01**

Switching function

**1**

Terminal style

**B — Z**

(※1) Contact plating and material

Code	Actuator
<b>N</b>	Standard
<b>P</b>	Splash proof
<b>Y</b>	Mustang
<b>R</b>	Soft Touch
<b>W</b>	Snap-in

Fig.	Number of poles
<b>1</b>	1
<b>2</b>	2
<b>3</b>	3
<b>4</b>	4

Fig.	Switching function
<b>01</b>	ON — ON
<b>02</b>	ON — (ON)

Fig.	Terminal style
<b>1</b>	Solder
<b>2</b>	PC/Straight

Code	Contact material	Plating
None	Bs+Ag or Cu+Ag	Ag
<b>B</b>	Bs or Cu	Ni+Au
<b>C</b>	Bs+Ag or Cu+Ag	Ni+Au

Note : Some combinations may not be available. Please check the "Table of Part Numbers" for each series.

※1 Brass  
Copper  
Silver  
Nickel  
Gold

# 8P

## Panel Seal

## Splash Proof Pushbutton Switches

RoHS Compliant



### Features

The **8P** series is a panel seal pushbutton switch with an O-ring to provide drip-proof and dust proof effect (corresponding to IP67 rating). Since a locking ring cannot be used because the panel seal is required, "D-cutting" is provided to the sleeve to prevent the switch from rotating. Note that the switch can also be mounted to a 6.5 mm dia. round hole instead of a "D-cut" hole without losing the drip-proof and dust proof effect.

### Table of Part Numbers

Terminal style	No. of pole Switching function	1 pole	2 poles	3 poles	4 poles
		ON — ON	<b>8P1011-Z</b>	★ <b>8P2011-Z</b>	★ <b>8P3011-Z</b>
Solder Lug	ON — (ON)	<b>8P1021-Z</b> ☆ <b>8P1021C-Z</b>	<b>8P2021-Z</b> ▲ <b>8P2021C-Z</b>	★ <b>8P3021-Z</b> —	★ <b>8P4021-Z</b> —
	ON — ON	★ <b>8P1012-Z</b>	★ <b>8P2012-Z</b>	—	—
Straight PC	ON — (ON)	★ <b>8P1022-Z</b>	★ <b>8P2022-Z</b>	—	—


PC Hole Layouts — Page 275.

Panel Cut-Out Dimensions — Page 275.

### Standard Accessories

《Supplied with switch》

Hex Nut	Lockwasher	O-Ring
<b>140008010241</b>	<b>140008030051</b>	<b>140000610076</b>
Nickel plated	Zinc plated	Nitrile rubber (Black)

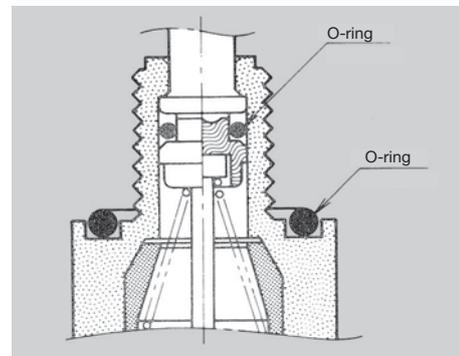

The 8P series is intended for panel seal and is not designed for use in water.

Part name	Color Button			
	Dimension A	φ 8	φ 10	φ 15
	Dimension B	7.5	8	10
 (Material : PA)	White	<b>140000481420</b>	<b>140000480082</b>	<b>140000480088</b>
	Red	<b>140000481421</b>	<b>140000480083</b>	<b>140000480089</b>
	Black	<b>140000481422</b>	<b>140000480081</b>	<b>140000480090</b>
	Gray	<b>140000481423</b>	<b>140000480084</b>	<b>140000480091</b>
	Green	<b>140000481424</b>	<b>140000480085</b>	<b>140000480092</b>
	Blue	<b>140000481425</b>	<b>140000480086</b>	<b>140000480093</b>
	Orange	<b>140000481426</b>	<b>140000480087</b>	<b>140000480094</b>
	Yellow	<b>140000481427</b>	<b>140000480371</b>	<b>140000480372</b>

★ : Made to order products.  
 ☆ : Semi-standard products.  
 (ON) : Momentary.  
 ▲ : Inquiry products.



● A Hex Nut, a Lockwasher, and an O-ring are supplied with the switch. A Color Button is also supplied with the switch. Please specify the part number from the above table when ordering.

**Color Button Installation**

Snap in the color button on to the actuator.



**SPDT**






Switching function		
Part No.		
※ 8P101- <span style="background-color: black; color: white;">■</span> -Z	ON	ON
8P102- <span style="background-color: black; color: white;">■</span> -Z	ON	(ON)
Connecting terminals	2-3	2-1

■ : Please refer to "Table of Part Numbers" on P.267 for a list of full part numbers.

Terminal numbers are not shown on the switch.

**DPDT**







Switching function		
Part No.		
※ 8P201- <span style="background-color: black; color: white;">■</span> -Z	ON	ON
8P202- <span style="background-color: black; color: white;">■</span> -Z	ON	(ON)
Connecting terminals	2-3 5-6	2-1 5-4

■ : Please refer to "Table of Part Numbers" on P.267 for a list of full part numbers.

Terminal numbers are not shown on the switch.

**3PDT**







Switching function		
Part No.		
※ 8P3011- <span style="background-color: black; color: white;">■</span> -Z	ON	ON
8P3021- <span style="background-color: black; color: white;">■</span> -Z	ON	(ON)
Connecting terminals	2-3 5-6 8-9	2-1 5-4 8-7

■ : Please refer to "Table of Part Numbers" on P.267 for a list of full part numbers.

Terminal numbers are not shown on the switch.

**4PDT**










Switching function		
Part No.		
※ 8P4011- <span style="background-color: black; color: white;">■</span> -Z	ON	ON
8P4021- <span style="background-color: black; color: white;">■</span> -Z	ON	(ON)
Connecting terminals	2-3 5-6 8-9 11-12	2-1 5-4 8-7 11-10

■ : Please refer to "Table of Part Numbers" on P.267 for a list of full part numbers.



Terminal numbers are not shown on the switch.

# Eight Switch

## Panel Cut-Out Dimensions

Series	8N		8R		8P	8Y	
Panel thickness	1.5 mm Max.	2.5 mm Max.	2 mm Max.	3 mm Max.	4.5 mm Max.	5 mm Max.	6 mm Max.
Dimensions							
	With Locking Ring	Without Locking Ring	With Locking Ring	Without Locking Ring		With Locking Ring	Without Locking Ring

## PC Hole Layouts

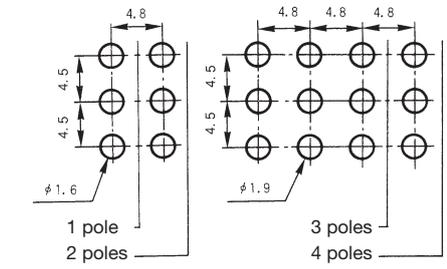Series	8N · 8P	8R · 8W
Dimensions		

## Precautions (8N·8P·8R·8W·8Y)

### 1. Soldering Specifications

(1) Manual soldering

Device : Solder iron

① 420°C Max. 3 sec. Max.

(2) Auto soldering

② 275°C ±10°C 5 sec. Max.

The above-stated soldering conditions shall apply only to switches with straight terminals. Auto soldering is not possible with right-angle terminals. Switches with right-angle terminals should be soldered manually according to the conditions specified in (1) above.

(3) When putting the switches through an aging process after they were soldered onto the printing board or after installed into a complete end product, be sure to remove the buttons of the switches.,

### 2. Mounting

- Do not bend the terminals before mounting the switch on the PC board.
- After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.
- For switches with straight terminals, solder the switch on the PC board after fixing the switch on the panel with a nut.

### 3. Flux Cleaning

- (1) Solvent : Fluorine or Alcohol type.
- (2) 8A/B/C/D/E/F/J/S series are not washable. To wash the PC board, clean the soldering surface of the PC board with a brush so that the switch is not exposed to the cleaning solution.

## Packaging Specification

