


Arbitrary/Function Generators

► AFG3021B • AFG3022B • AFG3101 • AFG3102 • AFG3251 • AFG3252

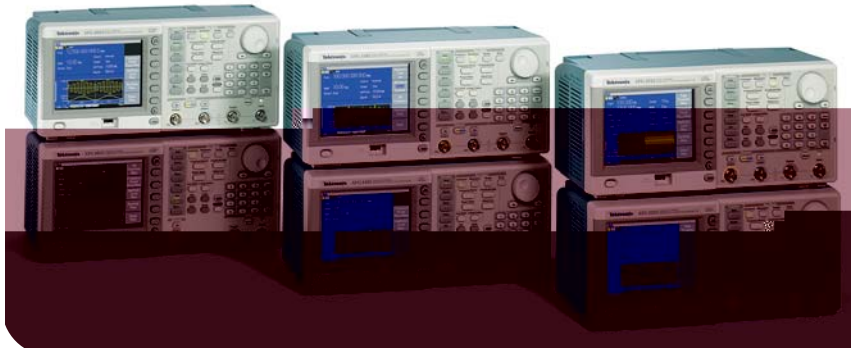

Unmatched performance, versatility, intuitive operation and affordability make the AFG3000 Series of Function, Arbitrary Waveform and Pulse Generators the most useful instruments in the industry.

Superior Performance and Versatility

Users can choose from 12 different standard waveforms. Arbitrary waveforms can be generated up to 128 K in length at high sampling rates. On pulse waveforms, leading and trailing edge time can be set independently. External signals can be connected and added to the output signal. Dual-channel models can generate two identical or completely different signals. All instruments feature a highly stable time base with only ± 1 ppm drift per year.

Intuitive User Interface Shows More Information at a Single Glance

A large screen shows all relevant waveform parameters and graphical waveshape at a single glance. This gives full confidence in the signal settings and lets you focus on the task at hand. Shortcut keys provide direct access to frequently used functions and parameters. Others can be selected conveniently through clearly structured menus. This reduces the time needed for learning and re-learning how to use the instrument. Look and feel are identical to the world's most popular TDS3000 Oscilloscopes.

ArbExpress™ Software Included for Creating Waveforms with Ease

With this PC software waveforms can be seamlessly imported from any Tektronix oscilloscope, or defined by standard functions, equation editor and waveform math.

► Features & Benefits

25 MHz, 100 MHz or 240 MHz Sine Waveforms

14 Bits, 250 MS/s, 1 GS/s or 2 GS/s Arbitrary Waveforms

5.6" Display for Full Confidence in Settings and Waveform Shape

Multi-language and Intuitive Operation Saves Set-up Time

Pulse Waveform with Variable Edge Times

AM, FM, PM, FSK, PWM

Sweep and Burst

Dual-channel Models Save Cost and Bench Space

USB Connector on Front Panel for Waveform Storage on Memory Device

USB, GPIB and LAN

► Applications

Electronic Test and Design

Sensor Simulation

Functional Test

Education and Training

Arbitrary/Function Generators

► AFG3021B • AFG3022B • AFG3101 • AFG3102 • AFG3251 • AFG3252

► Characteristics

► AFG3000 Series Characteristics

Model	AFG3021B/AFG3022B	AFG3101/AFG3102	AFG3251/AFG3252
Channels	1/2	1/2	1/2
Waveforms	Sine, Square, Pulse, Ramp, Triangle, Sin(x)/x, Exponential Rise and Decay, Gaussian, Lorentz, Haversine, DC, Noise		
Sine Wave	1 μ Hz to 25 MHz	1 μ Hz to 100 MHz	1 μ Hz to 240 MHz
Sine Wave in Burst Mode	1 μ Hz to 12.5 MHz	1 μ Hz to 50 MHz	1 μ Hz to 120 MHz
Amplitude Flatness (1 V_{p-p})			
<5 MHz	±0.15 dB	±0.15 dB	±0.15 dB
5 MHz to 20 MHz	±0.3 dB	±0.3 dB	±0.3 dB
20 MHz to 25 MHz	±0.5 dB	±0.3 dB	±0.3 dB
25 MHz to 100 MHz	—	±0.5 dB	±0.5 dB
100 MHz to 200 MHz	—	—	±1.0 dB
200 MHz to 240 MHz	—	—	±2.0 dB
Harmonic Distortion (1 V_{p-p})			
10 Hz to 20 kHz	<−70 dBc	<−60 dBc	<−60 dBc
20 kHz to 1 MHz	<−60 dBc	<−60 dBc	<−60 dBc
1 MHz to 5 MHz	<−50 dBc	<−50 dBc	<−50 dBc
5 MHz to 10 MHz	<−50 dBc	<−37 dBc	<−37 dBc
10 MHz to 25 MHz	<−40 dBc	<−37 dBc	<−37 dBc
>25 MHz	—	<−37 dBc	<−30 dBc
THD	<0.2% (10 Hz to 20 kHz, 1 V _{p-p})		
Spurious (1 V_{p-p})			
10 Hz to 1 MHz	<−60 dBc	<−60 dBc	<−50 dBc
1 MHz to 25 MHz	<−50 dBc	<−50 dBc	<−47 dBc
>25 MHz	—	<−50 dBc + 6 dBc/octave	<−47 dBc + 6 dBc/octave
Phase Noise, Typical	<−110 dBc/Hz at 20 MHz, 10 kHz offset, 1 V _{p-p}		
Residual Clock Noise	−63 dBm	−57 dBm	−57 dBm
Square Wave	1 μ Hz to 12.5 MHz	1 μ Hz to 50 MHz	1 μ Hz to 120 MHz
Rise/Fall Time	≤18 ns	≤5 ns	≤2.5 ns
Jitter (RMS), Typical	500 ps	200 ps	100 ps
Ramp Wave	1 μ Hz to 250 kHz	1 μ Hz to 1 MHz	1 μ Hz to 2.4 MHz
Linearity, Typical	≤0.1% of peak output	≤0.15% of peak output	≤0.2% of peak output
Symmetry	0.0% to 100.0%		
Pulse Wave	1 mHz to 12.5 MHz	1 mHz to 50 MHz	1 mHz to 120 MHz
Pulse Width	30.00 ns to 999.99 s	8.00 ns to 999.99 s	4.00 ns to 999.99 s
Resolution	10 ps or 5 digits		
Pulse Duty	0.001% to 99.999% (limitations of Pulse Width apply)		
Edge Transition Time	18 ns to 625 s	5 ns to 625 s	2.5 ns to 625 s
Resolution	10 ps or 4 digits		
Lead Delay	Range: 0 ps to Period − [Pulse Width + 0.8 * (Leading Edge Time + Trailing Edge Time)] Resolution: 10 ps or 8 digits		
Overshoot, Typical	<5%		
Jitter (RMS, Typical)	500 ps	200 ps	100 ps

► AFG3000 Series Characteristics (continued)

Model	AFG3021B/AFG3022B	AFG3101/AFG3102	AFG3251/AFG3252
Other Waveforms	1 μ Hz to 250 kHz	1 μ Hz to 1 MHz	1 μ Hz to 2.4 MHz
Noise Bandwidth (–3 dB)	25 MHz	100 MHz	240 MHz
Noise Type	White Gaussian		
DC (into 50 Ω)	–5 V to +5 V	–5 V to +5 V	–2.5 V to +2.5 V
Arbitrary Waveforms	1 mHz to 12.5 MHz	1 mHz to 50 MHz	1 mHz to 120 MHz
Non-volatile Memory	4 waveforms	4 waveforms	4 waveforms
Memory: Sample Rate	2 to 128 K: 250 MS/s	>16 K to 128 K : 250 MS/s 2 to 16 K: 1 GS/s	>16 K to 128 K : 250 MS/s 2 to 16 K: 2 GS/s
Vertical Resolution	14 bits	14 bits	14 bits
Rise Time/Fall Time	≤ 20 ns	≤ 8 ns	≤ 3 ns
Jitter (RMS)	4 ns	1 ns at 1 GS/s 4 ns at 250 MS/s	500 ps at 2 GS/s 4 ns at 250 MS/s
Amplitude, 50 Ω Load	10 mV _{p-p} to 10 V _{p-p}	20 mV _{p-p} to 10 V _{p-p}	≤ 200 MHz: 50 mV _{p-p} to 5 V _{p-p} >200 MHz: 50 mV _{p-p} to 4 V _{p-p}
Amplitude, Open Circuit	20 mV _{p-p} to 20 V _{p-p}	40 mV _{p-p} to 20 V _{p-p}	≤ 200 MHz: 100 mV _{p-p} to 10 V _{p-p} >200 MHz: 100 mV _{p-p} to 8 V _{p-p}
Accuracy	$\pm(1\%$ of setting + 1 mV) (1 kHz sine wave, 0 V offset, >10 mV _{p-p} amplitude)		
Resolution	0.1 mV _{p-p} , 0.1 mV _{RMS} , 1 mV, 0.1 dBm or 4 digits		
Units	V _{p-p} , V _{RMS} , dBm (sine wave only)		
Output Impedance	50 Ω		
Load Impedance Setting	Selectable: 50 Ω , 1 Ω to 10 k Ω , High Z (adjusts displayed amplitude according to selected load impedance)		
Isolation	42 V maximum to earth		
Short-circuit Protection	Signal outputs are robust against permanent shorts against floating ground		
External Voltage Protection	To protect signal outputs against external voltages use fuse adapter 013-0345-00		
DC Offset, 50 Ω Load	± 5 V _{pk} AC + DC	± 5 V _{pk} AC + DC	± 2.5 V _{pk} AC + DC
DC Offset, Open Circuit	± 10 V _{pk} AC + DC	± 10 V _{pk} AC + DC	± 5 V _{pk} AC + DC
Accuracy	$\pm(1\%$ of setting + 5 mV + 0.5% of amplitude (V _{p-p}))		
Resolution	1 mV		

Modulation**AM, FM, PM****Carrier Waveforms** – All, except Pulse, Noise and DC.**Source** – Internal/External.**Internal Modulating Waveform** – Sine, square, ramp, noise, ARB (AM: maximum waveform length 4,096; FM/PM: maximum waveform length 2,048).**Internal Modulating Frequency** – 2 mHz to 50 kHz.**AM Modulation Depth** – 0.0% to +120%.**Min FM Peak Deviation** – DC.**Max FM Peak Deviation** – See chart, next page.**Frequency Shift Keying****Carrier Waveforms** – All, except Pulse, Noise and DC.**Source** – Internal/External.**Internal Modulating Frequency** – 2 mHz to 1 MHz.**Number of Keys** – 2.**Pulse Width Modulation****Carrier Waveform** – Pulse.**Source** – Internal/External.**Internal Modulating Waveform** – Sine, square, ramp, noise, ARB.**Internal Modulating Frequency** – 2 mHz to 50 kHz.**Deviation** – 0% to 50% of pulse period.**Sweep****Waveforms** – All, except Pulse, Noise and DC.**Type** – Linear, logarithmic.**Sweep Time** – 1 ms to 300 s.**Hold/Return Time** – 0 ms to 300 s.**Resolution** – 1 ms or 4 digits.**Total Sweep Time Accuracy, Typical** – $\leq 0.4\%$.**Min Start/Stop Frequency** – All except ARB: 1 μ Hz, ARB: 1 mHz.**Max Start/Stop Frequency** – See chart, next page.**Burst****Waveforms** – All, except Noise and DC.**Type** – Triggered, gated (1 to 1,000,000 cycles or Infinite).**Internal Trigger Rate** – 1 ms to 500 s.**Gate and Trigger Sources** – Internal, external, remote interface.

Arbitrary/Function Generators

► AFG3021B • AFG3022B • AFG3101 • AFG3102 • AFG3251 • AFG3252

► Modulation: Max FM Peak Deviation

	AFG3021B/AFG3022B	AFG3101/AFG3102	AFG3251/AFG3252
Sine	12.5 MHz	50 MHz	120 MHz
Square	6.25 MHz	25 MHz	60 MHz
ARB	5 MHz	25 MHz	60 MHz
Others	100 kHz	500 kHz	2.4 MHz

PM Phase Deviation – 0° to +180°.

► Sweep: Max Start/Stop Frequency

	AFG3021B/AFG3022B	AFG3101/AFG3102	AFG3251/AFG3252
Sine	25 MHz	100 MHz	240 MHz
Square	12.5 MHz	50 MHz	120 MHz
ARB	12.5 MHz	50 MHz	120 MHz
Others	200 kHz	1 MHz	5 MHz

► Common Characteristics – Remote Programming

Remote Programming		GPIB, LAN 10Base-T/100Base-TX, USB 1.1		
Configuration Times, Typical	USB	LAN	GPIB	
Function Change	95 ms	103 ms	84 ms	
Frequency Change	2 ms	19 ms	2 ms	
Amplitude Change	60 ms	67 ms	52 ms	
Select User ARB	88 ms	120 ms	100 ms	
Data Download Time for 4000 Point Waveform Data, Typical	20 ms	84 ms	42 ms	

Auxiliary Inputs**Modulation Input** – Channel 1, Channel 2.**Input Range** –All except FSK: ± 1 V.

FSK: 3.3 V logic level.

Impedance – 10 k Ω .**Frequency Range** – DC to 25 kHz (122 KS/s).**External Triggered/Gated Burst Input** –

Level – TTL compatible.

Impedance – 10 k Ω .

Pulse Width – 100 ns minimum.

Slope – Positive/Negative, selectable.

Trigger Delay – 0.0 ns to 85 s.

Resolution – 100 ps or 5 digits.

Jitter (RMS), Typical – Burst: <500 ps (Trigger input to signal output).

10 MHz Reference Input –Impedance – 1 k Ω , AC coupled.Required Input Voltage Swing – 100 mV_{p-p} to 5 V_{p-p}.Lock Range – 10 MHz ± 35 kHz.**External Channel 1 Add Input** – AFG3101,

AFG3102, AFG3251, AFG3252 only.

Impedance – 50 Ω .Input Range – -1 V to $+1$ V (DC + peakAC).Bandwidth – DC to 10 MHz (-3 dB) at 1 V_{p-p}.**Auxiliary Outputs****Channel 1 Trigger Output** –Level – Positive TTL level pulse into 1 k Ω .Impedance – 50 Ω .

Jitter (RMS), Typical –

AFG3021B/22B: 500 ps.

AFG3101/02: 200 ps.

AFG3251/52: 100 ps.

10 MHz Reference Out – AFG3101, AFG3102,

AFG3251, AFG3252 only.

Impedance – 50 Ω , AC coupled.Amplitude – 1.2 V_{p-p} into 50 Ω load.**Common Characteristics****Frequency Setting Resolution** – 1 μ Hz or 12 digits**Phase (except DC, Noise, Pulse)** –Range – -180° to $+180^\circ$.

Resolution – 0.01° (sine), 0.1° (other waveforms).

Internal Noise Add – When activated, output signal amplitude is reduced to 50%.Level – 0.0% to 50% of amplitude (V_{p-p}) setting.

Resolution – 1%.

Main Output – 50 Ω .**Internal Frequency Reference** –

Stability – All except

ARB: ± 1 ppm, 0 °C to 50 °C.ARB: ± 1 ppm ± 1 μ Hz, 0 °C to 50 °C.Aging – ± 1 ppm per year.**Remote Programming** – See last table at left.**Power Source** – 100 to 240 V, 47 to 63 Hz or 115 V, 360 to 440 Hz.**Power Consumption** – Less than 120 W.**Warm-up Time, Typical** – 20 minutes.**Power On Self Calibration, Typical** – <16 s.**Acoustic Noise, Typical** – <50 dBA.**Display** – AFG3021B: 5.6" Monochrome LCD

All others: 5.6" Color LCD.

Physical Characteristics**Benchtop Configuration**

Dimensions	mm	in.
Height	156.3	6.2
Width	329.6	13.0
Depth	168.0	6.6
Weight	kg	lbs.
Net	4.5	9.9
Shipping	5.9	12.9

Environmental and Safety Characteristics**Temperature** –

Operating – 0 °C to +50 °C.

Nonoperating – -30 °C to $+70$ °C.**Humidity** –

Operating –

At or below $+40$ °C: $\leq 80\%$. $> +40$ °C to 50 °C: $\leq 60\%$.**Altitude** – Up to 10,000 feet/3,000 m.**EMC Compliance** –

European Union –

EN 61326 Class A.

EN 61000-3-2, and EN 61000-3-3.

IEC 61000-4-2, 4-3, 4-4, 4-5, 4-6, 4-11.

Australia – AS/NZS 2064.

Safety –

UL 61010-1:2004.

CAN/CSA C22.2 No. 61010-1:2004.

IEC 61010-1:2001.

Arbitrary/Function Generators

► AFG3021B • AFG3022B • AFG3101 • AFG3102 • AFG3251 • AFG3252

► Ordering Information

AFG3021B, AFG3022B, AFG3101, AFG3102, AFG3251, AFG3252

Arbitrary/Function Generator.

Includes: Quick-start user manual, power cord, USB cable, CD-ROM with reference manual, service manual and ArbExpress™ software, NIST-traceable calibration certificate. Please specify power plug when ordering.

International Power Plugs

Opt. A0 – North America power.

Opt. A1 – Universal Euro power.

Opt. A2 – United Kingdom power.

Opt. A3 – Australia power.

Opt. A5 – Switzerland power.

Opt. A6 – Japan power.

Opt. A10 – China power.

Opt. A11 – India power.

Opt. A99 – No power cord or AC adapter.

Manual Options

Note: Includes front panel overlay.

Opt. L0 – English (071-1631-xx).

Opt. L1 – French (071-1632-xx).

Opt. L2 – Italian (071-1669-xx).

Opt. L3 – German (071-1633-xx).

Opt. L4 – Spanish (071-1670-xx).

Opt. L5 – Japanese (071-1634-xx).

Opt. L7 – Simplified Chinese (071-1635-xx).

Opt. L8 – Traditional Chinese (071-1636-xx).

Opt. L9 – Korean (071-1637-xx).

Opt. L10 – Russian (071-1638-xx).

Opt. L99 – No manual.

Service

Opt. C3 – Calibration Service 3 years.

Opt. C5 – Calibration Service 5 years.

Opt. CA1 – Single calibration event or coverage for the designated calibration interval, whichever comes first.

Opt. D1 – Calibration Data Report.

Opt. D3 – Calibration Data Report 3 years (with Opt. C3).

Opt. D5 – Calibration Data Report 5 years (with Opt. C5).

Opt. R5 – Repair Service 5 years.

Warranty

Three-year warranty on parts and labor.

Recommended Accessories

Rackmount Kit – RM3100.

Fuse Adapter, BNC-P to BNC-R – 013-0345-00.

Fuse Set, 3 Pieces, 0.125 A – 159-0454-00.

BNC Cable Shielded, 3 ft. – 012-0482-00.

BNC Cable Shielded, 9 ft. – 012-1256-00.



► BNC Fuse Adapter and 0.125 A Fuse.

Arbitrary/Function Generators

► AFG3021B • AFG3022B • AFG3101 • AFG3102 • AFG3251 • AFG3252

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900

Austria +41 52 675 3777

Balkan, Israel, South Africa and other ISE Countries +41 52 675 3777

Belgium 07 81 60166

Brazil & South America (11) 40669400

Canada 1 (800) 661-5625

Central East Europe, Ukraine and the Baltics +41 52 675 3777

Central Europe & Greece +41 52 675 3777

Denmark +45 80 88 1401

Finland +41 52 675 3777

France +33 (0) 1 69 86 81 81

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-22275577

Italy +39 (02) 25086 1

Japan 81 (3) 6714-3010

Luxembourg +44 (0) 1344 392400

Mexico, Central America & Caribbean 52 (55) 5424700

Middle East, Asia and North Africa +41 52 675 3777

The Netherlands 090 02 021797

Norway 800 16098

People's Republic of China 86 (10) 6235 1230

Poland +41 52 675 3777

Portugal 80 08 12370

Republic of Korea 82 (2) 6917-5000

Russia & CIS +7 (495) 7484900

South Africa +27 11 206 8360

Spain (+34) 901 988 054

Sweden 020 08 80371

Switzerland +41 52 675 3777

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 01 June 2007

Our most up-to-date product information is available at:
www.tektronix.com



Product(s) are manufactured in ISO registered facilities.

Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Copyright © 2007, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

6/07 HB/WOW

76W-18656-2

Tektronix
Enabling Innovation