



HD74LS90 • Decade Counters

The HD74LS90 contains four master-slave flip-flops and additional gating to provide a divide-by-two counter and three-stage binary counter for divide-by-five. This device has a gated zero reset and also has gated set-to-nine inputs for use in BCD nine's complement applications. To use this maximum count length of this counter the B input is connected to the Q_A output. The input count pulses are applied to input A and the outputs are described in the appropriate function table. A symmetrical divide-by-ten count can be obtained from HD74LS90 counter by connecting the Q_D output to the A input and applying the input count to the B input which gives a divide-by-ten square wave at output Q_A .

PIN ARRANGEMENT



BLOCK DIAGRAM

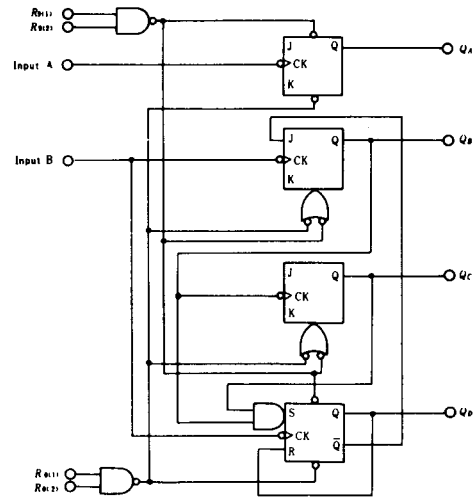

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Ratings	Unit
Supply voltage	V_{CC}	7.0	V
Input voltage	R Inputs	7.0	V
	A, B Inputs	5.5	V
Operating temperature range	T_{opr}	-20 ~ +75	°C
Storage temperature range	T_{stg}	-65 ~ +150	°C

FUNCTION TABLE

Reset/Count Function Table

Reset Inputs				Outputs			
$R_{0(1)}$	$R_{0(2)}$	$R_{9(1)}$	$R_{9(2)}$	Q_D	Q_C	Q_B	Q_A
H	H	L	X	L	L	L	L
H	H	X	L	L	L	L	L
X	X	H	H	H	L	L	H
X	L	X	L	Count			
L	X	L	X	Count			
L	X	X	L	Count			
X	L	L	X	Count			

BCD Count Sequence(Notes1) Bi-Quinary Count Sequence(Notes2)

Count	Outputs				Count	Outputs			
	Q_D	Q_C	Q_B	Q_A		Q_A	Q_D	Q_C	Q_B
0	L	L	L	L	0	L	L	L	L
1	L	L	L	H	1	L	L	L	H
2	L	L	H	L	2	L	L	H	L
3	L	L	H	H	3	L	L	H	H
4	L	H	L	L	4	L	H	L	L
5	L	H	L	H	5	H	L	L	L
6	L	H	H	L	6	H	L	L	H
7	L	H	H	H	7	H	L	H	L
8	H	L	L	L	8	H	L	H	H
9	H	L	L	H	9	H	H	L	L


- Notes) 1. Output Q_A is connected to input B for BCD count.
 2. Output Q_D is connected to input A for Bi-Quinary count.
 3. H; high level, L; low level, X; irrelevant.

HD74LS90

■ RECOMMENDED OPERATING CONDITIONS

Item	Symbol	min	typ	max	Unit
Count frequency	A input	0	—	32	MHz
	B input	0	—	16	
Pulse width	A input	15	—	—	ns
	B input	30	—	—	
	Reset inputs	15	—	—	
Setup time	t_{su}	25	—	—	ns

■ TIMING DEFINITION

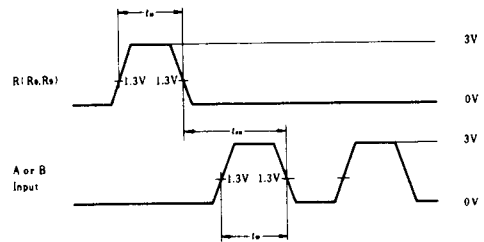

■ ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$)

Item		Symbol	Test Conditions	min	typ*	max	Unit	
Input voltage		V_{IH}		2.0	—	—	V	
		V_{IL}		—	—	0.8	V	
Output voltage		V_{OH}	$V_{CC}=4.75\text{V}$, $V_{IH}=2\text{V}$, $V_{IL}=0.8\text{V}$, $I_{OH}=-400\mu\text{A}$	2.7	—	—	V	
		V_{OL}	$V_{CC}=4.75\text{V}$, $V_{IH}=2\text{V}$, $V_{IL}=0.8\text{V}$	$I_{OL}=4\text{mA}^{**}$	—	—	0.4	V
			$I_{OL}=8\text{mA}^{**}$	—	—	0.5		
Input current	Any Reset	I_{IL}	$V_{CC}=5.25\text{V}$, $V_I=0.4\text{V}$	—	—	-0.4	mA	
	A input			—	—	-2.4		
	B input			—	—	-3.2		
	Any Reset	I_{IH}	$V_{CC}=5.25\text{V}$, $V_I=2.7\text{V}$	—	—	20	μA	
	A input			—	—	40		
	B input			—	—	80		
	Any Reset	I_I	$V_{CC}=5.25\text{V}$	$V_I=7\text{V}$	—	—	0.1	mA
	A input			$V_I=5.5\text{V}$	—	—	0.2	
	B input			—	—	0.4		
Short-circuit output current		I_{os}	$V_{CC}=5.25\text{V}$	-20	—	-100	mA	
Supply current * * *		I_{CC}	$V_{CC}=5.25\text{V}$	—	9	15	mA	
Input clamp voltage		V_{IK}	$V_{CC}=4.75\text{V}$, $I_{IN}=-18\text{mA}$	—	—	-1.5	V	

* $V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$

** Q_A output is tested at specified I_{OL} plus the limit value of I_{IL} for the B input. This permits driving the B input while maintaining full fan out capability.


*** I_{CC} is measured with all outputs open, both R_0 inputs grounded following momentary connection to 4.5V, and all other inputs grounded.

■ SWITCHING CHARACTERISTICS ($V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$)

Item	Symbol	Inputs	Outputs	Test Conditions	min	typ	max	Unit
Maximum count frequency	f_{max}	A	Q_A	$C_L=15\text{pF}$, $R_L=2\text{k}\Omega$	32	42	—	MHz
		B	Q_B		16	—	—	
Propagation delay time	t_{PLH}	A	Q_A		—	10	16	ns
	t_{PHL}				—	12	18	
	t_{PLH}	B	Q_D		—	32	48	ns
	t_{PHL}				—	34	50	
	t_{PLH}	B	Q_B		—	10	16	ns
	t_{PHL}				—	14	21	
	t_{PLH}	B	Q_C		—	21	32	ns
	t_{PHL}				—	23	35	
	t_{PLH}	B	Q_D		—	21	32	ns
	t_{PHL}				—	23	35	
	t_{PHL}	Set-to-0	$Q_A \sim Q_D$		—	26	40	ns
	t_{PLH}	Set-to-9	Q_A, Q_D		—	20	30	ns
			Q_B, Q_C		—	26	40	


■ TESTING METHOD

1) Test Circuit

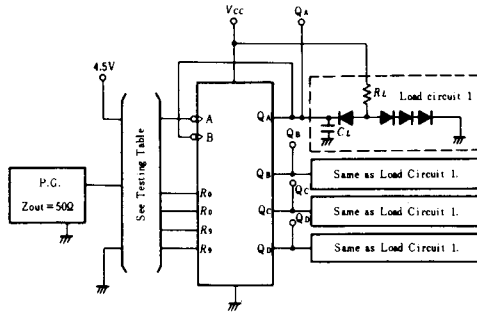

- Notes) 1. Input pulse; $t_{TLH} \leq 15\text{ns}$, $t_{THL} \leq 6\text{ns}$, $PRR = 1\text{MHz}$, duty cycle=50%
 2. C_L includes probe and jig capacitance.
 3. All diodes are 1S2074 Φ .

Waveform-1 f_{max} , t_{PLH} , t_{PHL} (Clock $\rightarrow$ Q)

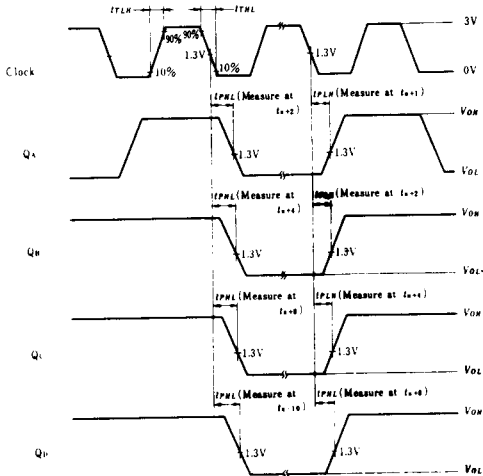

- Notes) 1. Input pulse; $t_{TLH} \leq 15\text{ns}$, $t_{THL} \leq 5\text{ns}$, $PRR = 1\text{MHz}$, duty cycle=50% and: for f_{max} , $t_{TLH} = t_{THL} \leq 2.5\text{ns}$.
 2. t_H is reference bit time when all outputs are low.


2) Testing Table

Item	From input to output	Inputs				Outputs			
		A	B	R0	R9	QA	QB	QC	QD
f_{max}	A $\rightarrow$ Q	IN	to QA	GND	GND	Out	Out	Out	Out
	B $\rightarrow$ Q	4.5V	IN	GND	GND	—	Out	Out	Out
t_{PLH} t_{PHL}	A $\rightarrow$ QA	IN	to QA	GND	GND	Out	—	—	—
	A $\rightarrow$ QB	IN	to QA	GND	GND	—	—	—	Out
	B $\rightarrow$ QB	4.5V	IN	GND	GND	—	Out	—	—
	B $\rightarrow$ QC	4.5V	IN	GND	GND	—	—	Out	—
	B $\rightarrow$ QD	4.5V	IN	GND	GND	—	—	—	Out
	R0 $\rightarrow$ Q	IN*	to QA	IN	GND	Out	Out	Out	Out
	R9 $\rightarrow$ Q	IN*	to QA	GND	IN	Out	Out	Out	Out


*: For initialized

** : Measured with each input and unused inputs at 4.5V.

Waveform-2 t_{PHL} ($R_0 \rightarrow Q$)

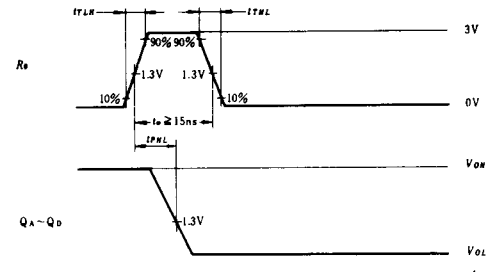

Waveform-3 t_{PLH} , t_{PHL} ($R_9 \rightarrow Q$)

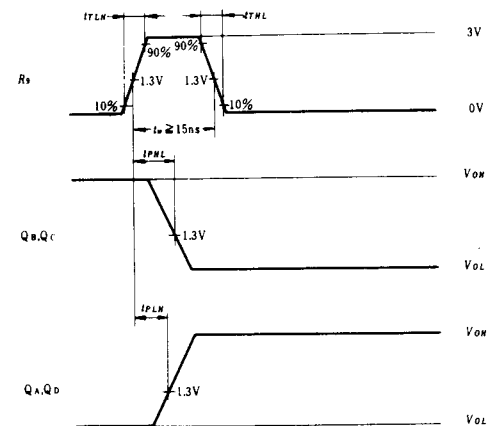

- Notes) 1. $t_{TLH} \leq 15\text{ns}$, $t_{THL} \leq 5\text{ns}$.

PACKAGING INFORMATION

T-90-20


Factory orders for circuits described in this databook should include a three-part type number as explained in the following example.

HD 74LS00 P


Package ; Plastic DIP ; letters P
Cerdip ; non-letters
Circuit description
Prefix : HD ; Hitachi Digital IC

■ Plastic DIP


● 14 Pin

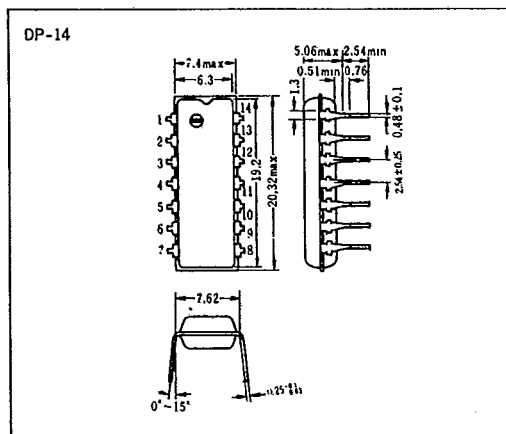


● 16 Pin

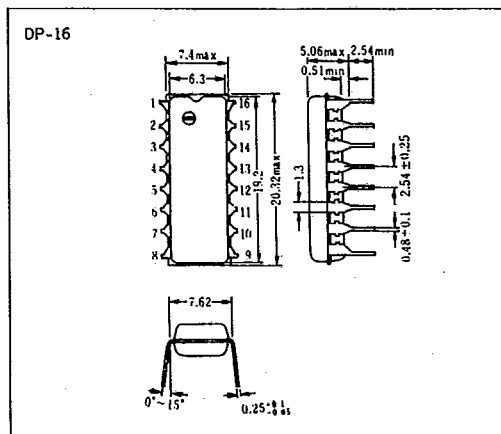

● 20 Pin

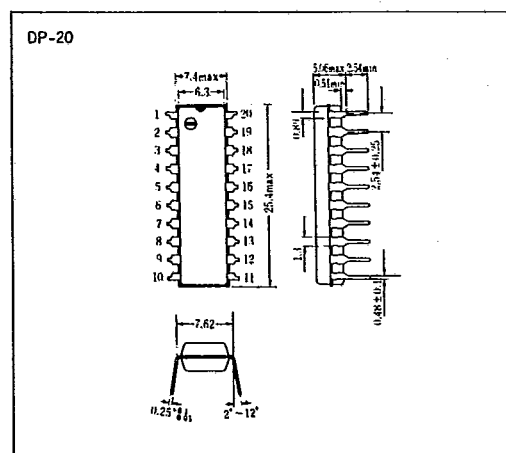

● 24 Pin

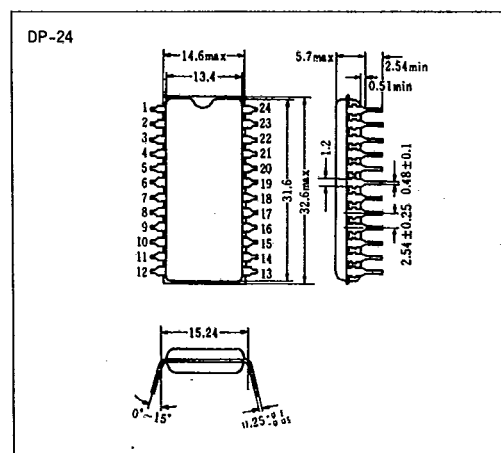


Hitachi America Ltd. • 2210 O'Toole Ave. • San Jose, CA 95131 • (408) 435-8300

T-90-20


PACKAGING INFORMATION

■Cerdip


●14 Pin

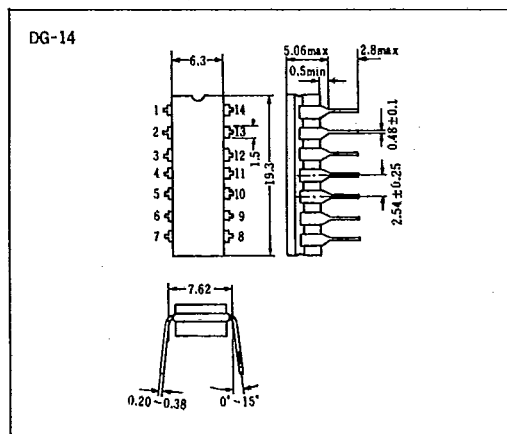

●16 Pin

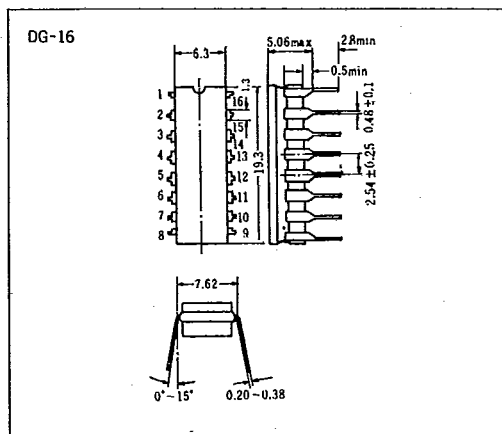

●20 Pin

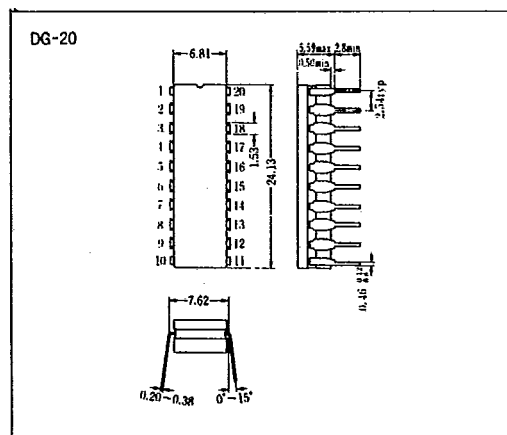

●24 Pin

