











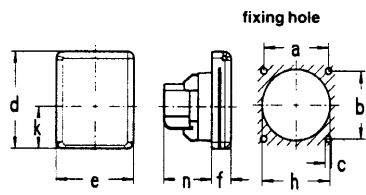

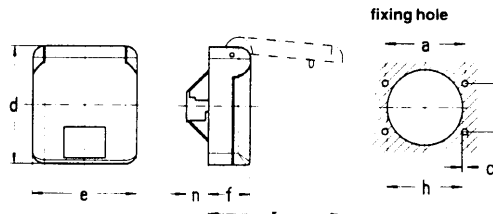
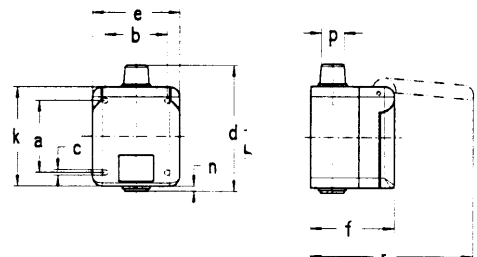
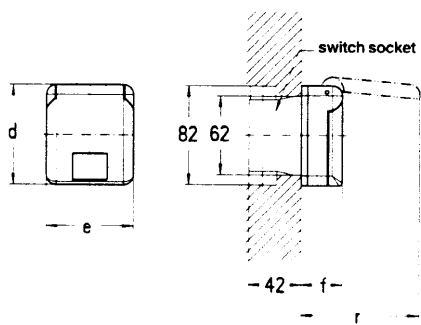


Amp	Volt	Hz	IP Ident. colour + h	Part No.	Couplers	3 P +  IEC/EN 60 309	  9	EAN No. 4015609...																								
 IP44					flexible cable entry																											
16	400	50/60	6	310 406	 		10	015665 015641 015689 015672 015696 015627 015702																								
	110	50/60	4	310 404																												
	230	50/60	9	310 409																												
	500	50/60	7	310 407																												
	>50	100/300	10	310 410																												
	>50	300/500	2	310 402																												
	440	60	11	310 411			192																									
32	400	50/60	6	330 406																												
	110	50/60	4	330 404																												
	230	50/60	9	330 409																												
	500	50/60	7	330 407																												
	>50	100/300	10	330 410																												
	>50	300/500	2	330 402																												
	440	60	11	330 411			290																									
63	400	50/60	6	360 406																												
	110	50/60	4	360 404																												
	230	50/60	9	360 409																												
	500	50/60	7	360 407																												
	>50	100/300	10	360 410																												
	>50	300/500	2	360 402																												
	440	60	11	360 411			719																									
					<table><tr><th>Ampère</th><th>d</th><th>Øe</th><th>f</th><th>m</th><th>Øp</th></tr><tr><td>16 A</td><td>161</td><td>58</td><td>76</td><td>113</td><td>8/21</td></tr><tr><td>32 A</td><td>196</td><td>72</td><td>91</td><td>141</td><td>11/24</td></tr><tr><td>63 A</td><td>266</td><td>96</td><td>114</td><td>196</td><td>15/33</td></tr></table>				Ampère	d	Øe	f	m	Øp	16 A	161	58	76	113	8/21	32 A	196	72	91	141	11/24	63 A	266	96	114	196	15/33
Ampère	d	Øe	f	m	Øp																											
16 A	161	58	76	113	8/21																											
32 A	196	72	91	141	11/24																											
63 A	266	96	114	196	15/33																											
</																																

Amp	Volt	Hz	IP Ident. colour + h	Part No.	Wall mount appliance inlets	3 P +  IEC/EN 60 309	  9	EAN No. 4015609...																																						
16	400	50/60	 IP44 6	610 406	external fixing means, 1 top cable entry   	<table><tr><th>Ampère</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>l</th><th>n</th><th>Pg</th></tr><tr><td>16 A</td><td>60</td><td>5,3</td><td>80</td><td>74</td><td>73</td><td>31</td><td>117</td><td>16</td></tr><tr><td>32 A</td><td>60</td><td>5,3</td><td>97</td><td>82</td><td>80</td><td>45</td><td>141</td><td>21</td></tr></table>	Ampère	b	c	d	e	f	l	n	Pg	16 A	60	5,3	80	74	73	31	117	16	32 A	60	5,3	97	82	80	45	141	21	10 164	023141 023134 023165 023158 023172 023127 023189 024056 024032 024070 024063 024087 024018 024094											
	Ampère	b	c	d			e	f	l	n	Pg																																			
	16 A	60	5,3	80			74	73	31	117	16																																			
	32 A	60	5,3	97			82	80	45	141	21																																			
	110	50/60	4	610 404																																										
	230	50/60	9	610 409																																										
	500	50/60	7	610 407																																										
	>50	100/300	10	610 410																																										
	>50	300/500	2	610 402																																										
	440	60	11	610 411																																										
	32	400	50/60	6			630 406	internal fixing means, 2 cable entries both, top and bottom (knock-out)   	<table><tr><th>Ampère</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>l</th><th>n</th><th>v</th><th>Pg</th></tr><tr><td>16 A</td><td>66,5</td><td>5</td><td>96</td><td>95</td><td>140</td><td>47,5</td><td>151</td><td>7</td><td>16/21</td></tr><tr><td>32 A</td><td>66,5</td><td>5</td><td>96</td><td>95</td><td>140</td><td>47,5</td><td>160</td><td>7</td><td>16/21</td></tr></table>	Ampère	b	c	d	e	f	l	n	v	Pg	16 A	66,5	5	96	95	140	47,5	151	7	16/21	32 A	66,5	5	96			95	140	47,5	160	7	16/21	5 323	023783 023776 023790 165735 165742 165728 165759 024629 166978 146178 166985 165926 165919 165933			
		Ampère	b	c			d			e	f	l	n	v	Pg																															
16 A		66,5	5	96	95	140	47,5			151	7	16/21																																		
32 A		66,5	5	96	95	140	47,5			160	7	16/21																																		
110		50/60	4	630 404																																										
230		50/60	9	630 409																																										
500		50/60	7	630 407																																										
>50		100/300	10	630 410																																										
>50		300/500	2	630 402																																										
440		60	11	630 411																																										
16		400	50/60	 IP67 6	618 406	internal fixing means, 2 cable entries both, top and bottom (knock-out)   	<table><tr><th>Ampère</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>l</th><th>n</th><th>u</th><th>v</th><th>Pg</th></tr><tr><td>16 A</td><td>66,5</td><td>5</td><td>96</td><td>95</td><td>140</td><td>47,5</td><td>154</td><td>81</td><td>7</td><td>16/21</td></tr><tr><td>32 A</td><td>66,5</td><td>5</td><td>96</td><td>95</td><td>147</td><td>47,5</td><td>164</td><td>96</td><td>7</td><td>16/21</td></tr></table>			Ampère	b	c	d	e	f	l	n	u	v	Pg	16 A	66,5	5	96	95	140	47,5	154	81	7	16/21	32 A	66,5	5	96	95	147	47,5	164	96	7			16/21	5 328	023844 142606 023851 165773 165780 165766 165797 024681 024674 024698 167029 167036 167012 167043
		Ampère	b	c	d					e	f	l	n	u	v	Pg																														
	16 A	66,5	5	96	95			140	47,5	154	81	7	16/21																																	
	32 A	66,5	5	96	95			147	47,5	164	96	7	16/21																																	
	110	50/60	4	618 404																																										
	230	50/60	9	618 409																																										
	500	50/60	7	618 407																																										
	>50	100/300	10	618 410																																										
	>50	300/500	2	618 402																																										
	440	60	11	618 411																																										
	cable gland Pg 16 enclosed				6			638 406	5 427	024681 024674 024698 167029 167036 167012 167043																																				
	400	50/60	4	638 404																																										
230	50/60	9	638 409																																											
500	50/60	7	638 407																																											
>50	100/300	10	638 410																																											
>50	300/500	2	638 402																																											
440	60	11	638 411																																											
cable gland Pg 21 enclosed				6	668 406	2 827	024926 024919 024940 024933 166046 166039 024957																																							
400	50/60	4	668 404																																											
230	50/60	9	668 409																																											
500	50/60	7	668 407																																											
>50	100/300	10	668 410																																											
>50	300/500	2	668 402																																											
440	60	11	668 411																																											
63	400	50/60	6	668 406	external fixing means, 1 top cable entry   			<table><tr><th>Ampère</th><th>a</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>n</th><th>u</th><th>Pg</th></tr><tr><td>63 A</td><td>120</td><td>106</td><td>5,6</td><td>152</td><td>118</td><td>118</td><td>232</td><td>113</td><td>29</td></tr></table>	Ampère	a	b	c	d	e	f	n	u	Pg	63 A	120	106	5,6	152	118	118	232	113	29	2 827	024926 024919 024940 024933 166046 166039 024957																
	Ampère	a	b	c					d	e	f	n	u	Pg																																
	63 A	120	106	5,6					152	118	118	232	113	29																																
	110	50/60	4	668 404																																										
	230	50/60	9	668 409																																										
	500	50/60	7	668 407																																										
	>50	100/300	10	668 410																																										
	>50	300/500	2	668 402																																										
	440	60	11	668 411																																										
	see page 2/93																																													

Amp	Volt	Hz	IP Ident. colour + h	Part No.	Schuko socket outlets	2 P +  DIN 49 440	  9	EAN No. 4015609...																					
16	250~	-	 IP44	10 003 1)	panel socket straight   fixing dimension = a + b, flange dim. = d + e <table><tr><th>Ampère</th><th>a</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>h</th><th>k</th><th>n</th></tr><tr><td>16 A</td><td>38</td><td>38</td><td>4,2</td><td>60</td><td>50</td><td>12,5</td><td>43,5</td><td>26</td><td>26,5</td></tr></table>	Ampère	a	b	c	d	e	f	h	k	n	16 A	38	38	4,2	60	50	12,5	43,5	26	26,5	10	003457		
	Ampère	a		b		c	d	e	f	h	k	n																	
	16 A	38		38		4,2	60	50	12,5	43,5	26	26,5																	
250~	-	10 001 2)	46	003433																									
1) blue 2) grey				10 014	Facility for protection against accidental contact with live parts according to VBG 4 for Schuko socket outlets	10 3	180493																						
16	250~	-	 IP44	- 10 004	mondo panel socket straight, RAL 7035 light grey   fixing dimension = a + b, flange dim. = d + e <table><tr><th>Ampère</th><th>a</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>h</th><th>n</th><th>r</th></tr><tr><td>16 A</td><td>53</td><td>32</td><td>4,2</td><td>80</td><td>70</td><td>28</td><td>50</td><td>18</td><td>91</td></tr></table>	Ampère	a	b	c	d	e	f	h	n	r	16 A	53	32	4,2	80	70	28	50	18	91	10 94	003464		
	Ampère	a		b		c	d	e	f	h	n	r																	
	16 A	53		32		4,2	80	70	28	50	18	91																	
16	250~	-	 IP44	- 10 007	mondo panel socket, surface mounting, RAL 7035 light grey   <table><tr><th>Ampère</th><th>a</th><th>b</th><th>c</th><th>d</th><th>e</th><th>f</th><th>k</th><th>n</th><th>p</th><th>r</th></tr><tr><td>16 A</td><td>58</td><td>50</td><td>4,5</td><td>98</td><td>70</td><td>68</td><td>80</td><td>5</td><td>7/17,5</td><td>130</td></tr></table>	Ampère	a	b	c	d	e	f	k	n	p	r	16 A	58	50	4,5	98	70	68	80	5	7/17,5	130	10 153	003495
	Ampère	a		b		c	d	e	f	k	n	p	r																
	16 A	58		50		4,5	98	70	68	80	5	7/17,5	130																
16	250~	-	 IP44	- 10 008	mondo wall socket outlet, flush-type, RAL 1013 pearl white, with plaster thickness adjustment   switch socket <table><tr><th>Ampère</th><th>d</th><th>e</th><th>f</th><th>r</th></tr><tr><td>16 A</td><td>80</td><td>70</td><td>33</td><td>96</td></tr></table>	Ampère	d	e	f	r	16 A	80	70	33	96	10 120	003501												
	Ampère	d		e		f	r																						
	16 A	80		70		33	96																						