


cable snap - for cables up to 2.0" (50,8mm)

Ferrite assembly in fully enclosed nylon case; functional with wires and cables up to a 2.0" (50,8mm) diameter. Snap closed around wire by claspng shut to position assembly.

May also be mounted with a flat-head screw through the .120" (3,0mm) diameter hole in the bottom by temporarily removing lower ferrite half.







PART No.	A		B		C		D		IMPEDANCE IN OHMS
CS28B1642	.852	21,6	.885	22,5	.840	21,3	.282	7,2	100 @ 100MHz
CS28B1805	1.040	26,4	.667	16,9	1.025	26,4	.340	8,6	73 @ 100MHz
CS28B1937	1.182	30,0	.780	19,8	1.188	30,2	.425	10,8	117 @ 100MHz
CS28B1984	1.218	30,9	.705	17,9	1.220	31,0	.525	13,3	62 @ 100MHz
CS28B1501	1.725	43,8	1.232	31,3	1.720	43,7	.710	18,0	177 @ 100MHz
CS28B1500	1.725	43,8	1.232	31,3	1.720	43,7	.960	24,4	133 @ 100MHz
CS28B2000	2.350	59,7	1.851	47,0	2.309	58,6	.960	24,4	See page 45 for more details 380 @ 100MHz
CS28B4000	4.500	114,2	1.851	47,0	4.687	119,0	1.960	49,8	See page 45 for more details 290 @ 100MHz

optional material formulations available upon request:

- low frequency 30 MHz peak
- high frequency 700 MHz peak

performance by part number:

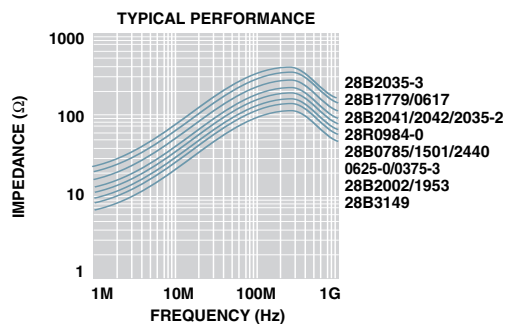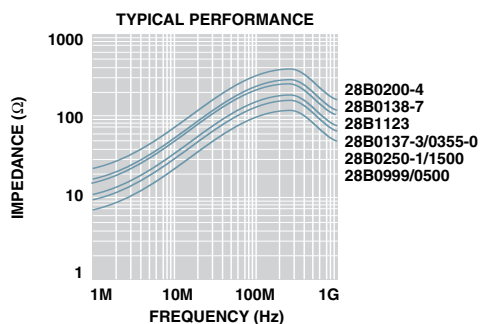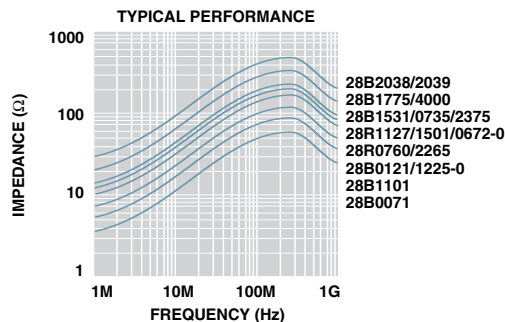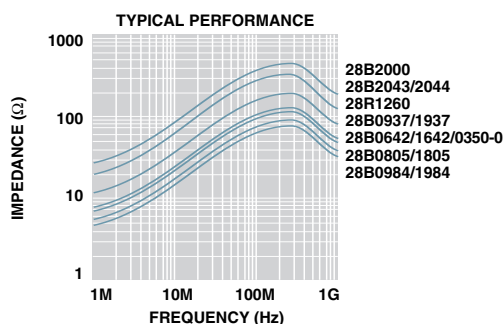

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LeaderTech:](#)

[CS28B1805](#) [CS28B1642](#) [CS28B2000](#) [CS28B1984](#) [CS28B1937](#) [CS28B1501](#) [CS28B1500](#)