


0.3mm Pitch, Vertical mating, Board-to-Micro Coaxial Cable Connectors

DF56 Series

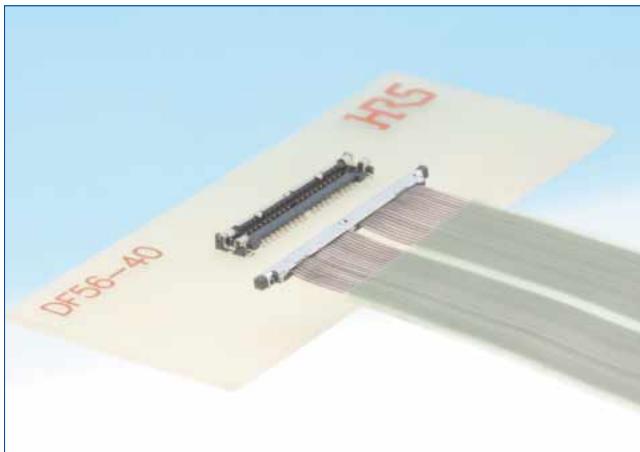

High contact reliability

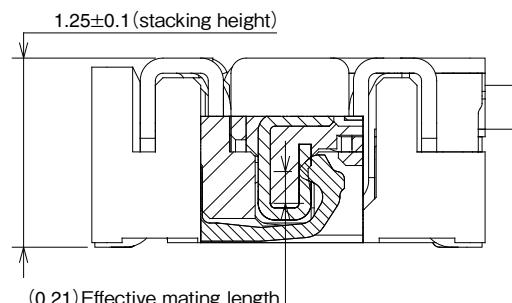


Fig.1

Features

1. Small mated height and board occupied space

Small pitch (0.3mm) and mated height (1.25mm) allows use in space-restricted areas. It's a small connector with mated height of 1.25mm (1.35mm MAX) and depth of 2.6mm.

2. Compatibility with small diameter hinges

AWG44 x 40 are compatible with hinge diameters of ϕ 2.8mm, which allows wiring in small hinge in side devices.

3. Reliable electrical and mechanical connection

Despite its small mated height, unique contact configuration assures highly reliable connection, with effective mating length of 0.21mm.(Fig.1)

4. Durable plug construction

Formed metal shells on the top and side surfaces form a strong and rigid assembly.

5. Enhanced shielding and ground connections

Metal shells on the plug and receptacle connect to each other with a reliable multi-point ground contacts, assuring reliable ground connection and EMC protection. (Fig.2)

6. Reliable lock

Fully mated condition is assured with reliable locks at 4 locations, confirming it with a distinct tactile click. (Fig.3)

7. Solder wicking prevention

Nickel barriers prevent solder wicking in the critical contact areas.

8. RoHS, Halogen-free*

*As defined by IEC61249-2-21
Br-900 ppm maximum, Cl-900 ppm maximum,
Cl + Br combined-1,500 ppm maximum.

Connectors for conductivity tests

We have a line-up of plug and receptacle connectors for inspection, usable for electrical testing.

In cases where the application will demand a high level of reliability, such as automotive, please contact a company representative for further information.

2017.6③

HRS

■ Specifications

| | | | | |
|---------|-----------------------------|--|--|--|
| Ratings | Current rating | 0.2A (42 AWG) 0.15A (44 AWG) 0.1A (46 AWG) | Operating temperature range : Operating humidity range: | -35 to +85°C (Note 1) 20% to 80% RH |
| | Voltage rating 30Vrms AC | 30V AC | Storage temperature range : Storage humidity range : | -10 to +60°C (Note 2) 40% to 70% RH |

| Item | Specification | Conditions |
|---------------------------------|--|--|
| 1. Insulation resistance | 50MΩ min. | 100V DC |
| 2. Withstanding voltage | No flashover or insulation breakdown | 100Vrms AC / 1 minute |
| 3. Contact resistance | Signal : 80mΩ max, Ground 80mΩ max | 100mA (DC or 1,000Hz) |
| 4. Vibration | No electrical discontinuity of 1μs or longer | Frequency : 10 to 55Hz, single amplitude of 0.75mm, 10 cycles in each of the 3 axis |
| 5. Humidity | Contact resistance (change from initial value) 50mΩ max. Insulation resistance : 25MΩ min. | 96 hours at of 40 ±2°C, and humidity of 90 to 95% |
| 6. Temperature cycle | Contact resistance (change from initial value) 50mΩ max. Insulation resistance : 25MΩ min. | -55°C → 5 to 35°C → 85°C → 5 to 35°C Time : 30 min. → 2 to 3 min. → 30 min. → 2 to 3 min. 5 cycles |
| 7. Durability | Contact resistance (change from initial value) 50mΩ max. | 20 cycles |
| 8. Resistance to soldering heat | No deformation of affecting performance | Reflow : At the recommended temperature profile Manual soldering : 350°C for 3 seconds |

Note1 : Includes temperature rise caused by current flow.

Note2 : The term "storage" refers to products stored for a long period prior to mounting and use. The operating temperature and humidity range covers the non-conducting condition of installed connectors in storage, shipment or during transportation after board mounting.

Note3 : Temperature rise of connector body only, and that of case is not included.

■ Materials / Finish

| Product | Part | Material | Finish | Remarks |
|------------|----------------|-----------------|-------------|---------|
| Receptacle | Insulator | LCP | Color:Black | UL94V-0 |
| | Contacts | Phosphor bronze | Gold plated | — |
| | Metal fittings | Phosphor bronze | Tin plated | — |
| Plug | Insulator | LCP | Color:Black | UL94V-0 |
| | Contacts | Phosphor bronze | Gold plated | — |
| | Metal cover | Stainless | Tin plated | — |
| Shell | Metal cover | Stainless | Tin plated | — |

■Product Number Structure

Refer to the chart below when determining the product specifications from the product number.
Please select from the product numbers listed in this catalog when placing orders.

●Connector

DF 56 J - * S - 0.3 V ()**

DF 56 J - * P - SHL

| | |
|---|--|
| ① Series name : DF | ⑥ Contact pitch : 0.3mm |
| ② Series No. : 56 | |
| ③ Connector style C : Stand-off type (No pattern prohibited area under connector) J : Connector for conductivity tests Blank : Standard (With pattern prohibited area under connector) | ⑦ Termination type V : Straight SMT SD : Fine coaxial cable plug |
| ④ Number of contacts C : Stand-off type 26, 30, 40 Standard : 40, 50 | ⑧ Packaging (51) : Embossed tape packaging |
| ⑤ Connector type S : Receptacle P : Plug | ⑨ Installation item (separate) SHL : Metal cover |

■Combinations

[Standard use]

DF56-*S-0.3V(**) + DF56-*P-ASSY
[DF56-*P-0.3SD(**)
DF56-*P-SHL]

Note : The product specification of the above combination is shown on page 2.

[Receptacle conductivity test]

DF56-*S-0.3V(**) + DF56J-*P-ASSY (Note)
[DF56-*P-0.3SD(**)
DF56J-*P-SHL]

Note : This harness item is only usable for the receptacle test.

For the product specification of the above combination, please contact our sales department.

[Plug for conductivity test]

DF56J-*S-0.3V(**) (Note) + DF56-*P-ASSY
[DF56-*P-0.3SD(**)
DF56-*P-SHL]
DF56CJ-*S-0.3V(**) + DF56-*P-ASSY
[DF56-*P-0.3SD(**)
DF56-*P-SHL]

Note : This harness item is only usable for the plugs and receptacles test.


For the product specification of the above combination, please contact our sales department.

* : ASSY means a harness item.


■ Receptacle (SMT)



● 40 pos

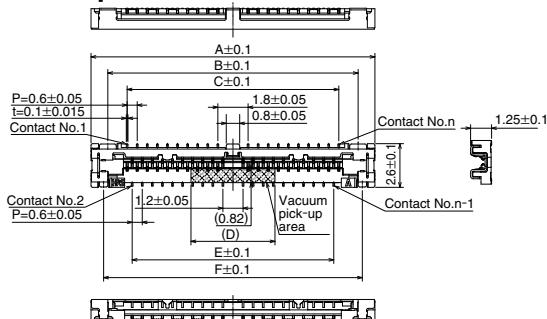

● 50 pos

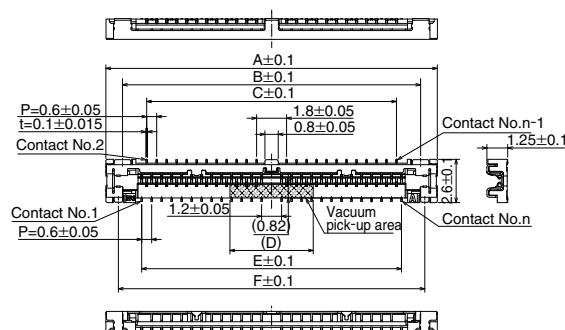

Note : The position of contact No.1 is different depending on No. of positions.

[Specifications number] - * *, (* *)
(51) : Embossed tape packaging



Unit : mm

| Part No. | HRS No. | No. of contacts | A | B | C | D | E | F |
|-------------------|---------------|-----------------|-------|-------|-------|--------|-------|-------|
| DF56-40S-0.3V(**) | 662-5600-0 ** | 40 | 16.90 | 14.90 | 12.60 | (5.00) | 12.00 | 15.40 |
| DF56-50S-0.3V(**) | 662-5606-7 ** | 50 | 19.90 | 17.90 | 15.00 | | 15.60 | 18.40 |

◆ Recommended PCB mounting pattern

● 40 pos

● 50 pos

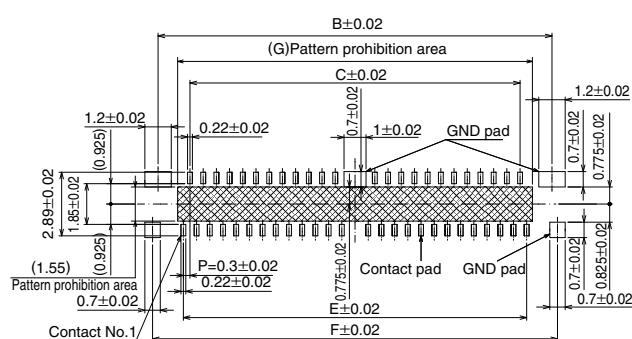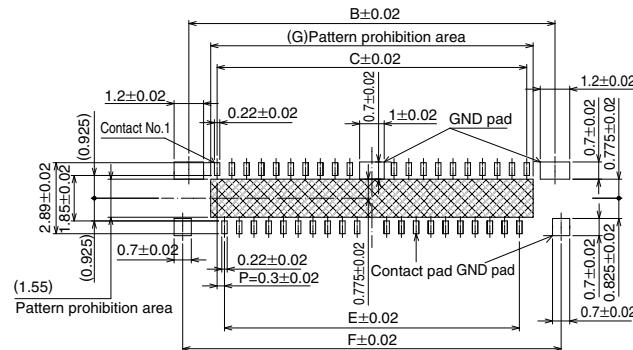

Note : The position of contact No.1 is different depending on No. of positions.

[Specifications number] - * *, (* *)
(51) : Embossed tape packaging

Unit : mm

| Part No. | HRS No. | No. of contacts | B | C | D | E | F | G |
|-------------------|---------------|-----------------|-------|-------|--------|-------|-------|-------|
| DF56-40S-0.3V(**) | 662-5600-0 ** | 40 | 14.90 | 12.60 | (5.00) | 12.00 | 15.40 | 13.12 |
| DF56-50S-0.3V(**) | 662-5606-7 ** | 50 | 17.90 | 15.00 | | 15.60 | 18.40 | 16.12 |


Note 1 : Tape and reel packaging (5,000 pcs/reel).

Order by number of reels.


■ Receptacle (SMT).....Stand-off type



● 26 pos/30 pos

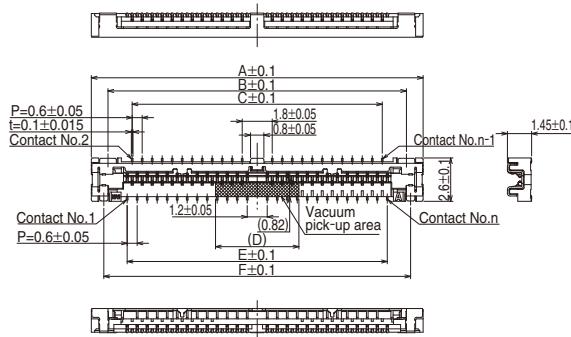

● 40 pos

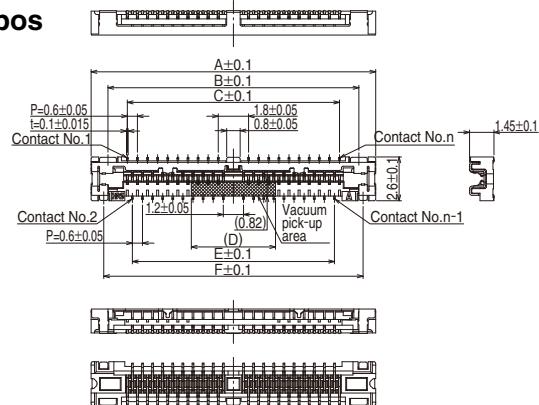

Note : The position of contact No.1 is different depending on No. of positions.


[Specifications number] - * *, (* *)
(51) : Embossed tape packaging

Unit : mm


| Part No. | HRS No. | No. of contacts | A | B | C | D | E | F |
|--------------------|---------------|-----------------|-------|-------|-------|--------|-------|-------|
| DF56C-26S-0.3V(**) | 662-5603-9 ** | 26 | 12.70 | 10.70 | 7.80 | (5.00) | 8.40 | 11.20 |
| DF56C-30S-0.3V(**) | 662-5616-0 ** | 30 | 13.90 | 11.90 | 9.00 | | 9.60 | 12.40 |
| DF56C-40S-0.3V(**) | 662-5619-9 ** | 40 | 16.90 | 14.90 | 12.60 | | 12.00 | 15.40 |

◆ Recommended PCB mounting pattern.....Stand-off type

● 26 pos/30 pos

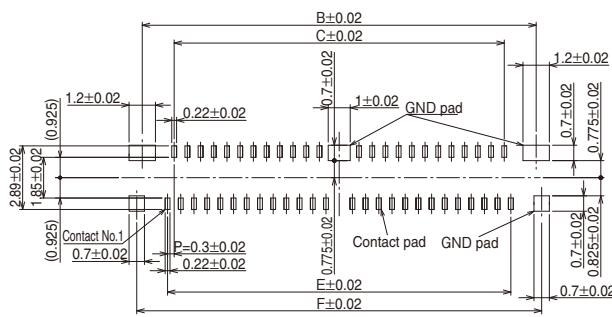

● 40 pos

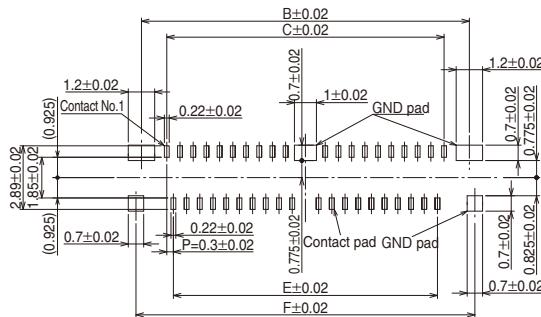

Note : The position of contact No.1 is different depending on No. of positions.

[Specifications number] - * *, (* *)
(51) : Embossed tape packaging


Unit : mm

| Part No. | HRS No. | No. of contacts | B | C | E | F |
|--------------------|---------------|-----------------|-------|-------|-------|-------|
| DF56C-26S-0.3V(**) | 662-5603-9 ** | 26 | 10.70 | 7.80 | 8.40 | 11.20 |
| DF56C-30S-0.3V(**) | 662-5616-0 ** | 30 | 11.90 | 9.00 | 9.60 | 12.40 |
| DF56C-40S-0.3V(**) | 662-5619-9 ** | 40 | 14.90 | 12.60 | 12.00 | 15.40 |

Note 1 : Tape and reel packaging (5,000 pcs/reel).

Order by number of reels.

■Plug

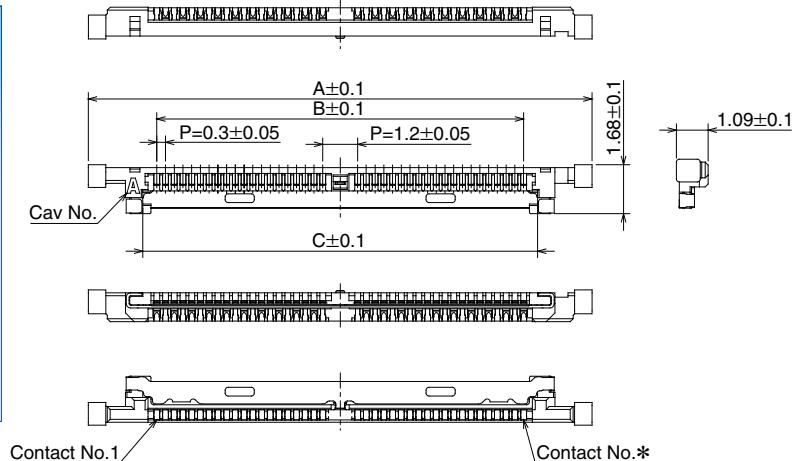

[Specifications number] - * *, (* *)
(51) : Embossed tape packaging

★Standard type

Unit : mm

| Part No. | HRS No. | No. of contacts | A | B | C | D |
|--------------------|---------------|-----------------|-------|-------|-------|-------|
| DF56-26P-0.3SD(**) | 662-5604-1 ** | 26 | 13.10 | 8.40 | 9.36 | 9.20 |
| DF56-30P-0.3SD(**) | 662-5617-3 ** | 30 | 14.30 | 9.60 | 10.56 | 10.40 |
| DF56-40P-0.3SD(**) | 662-5601-3 ** | 40 | 17.30 | 12.60 | 13.56 | 13.40 |
| DF56-50P-0.3SD(**) | 662-5607-0 ** | 50 | 20.30 | 15.60 | 16.56 | 16.40 |

Note 1 : Tape and reel packaging (10,000 pcs/reel). Order by number of reels.



Note 2 : The metal cover (DF56-*P-SHL) is required for micro coaxial cable termination.

★The type of emphasis for operation (A part in a different)

Unit : mm


| Part No. | HRS No. | No. of contacts | A | B | C | D |
|---------------------|---------------|-----------------|-------|-------|-------|-------|
| DF56L-26P-0.3SD(**) | 662-5623-6 ** | 26 | 13.50 | 8.40 | 9.36 | 9.20 |
| DF56L-30P-0.3SD(**) | 662-5625-1 ** | 30 | 14.70 | 9.60 | 10.56 | 10.40 |
| DF56L-50P-0.3SD(**) | 662-5626-4 ** | 50 | 20.70 | 15.60 | 16.56 | 16.40 |

◆Recommended Micro Coaxial Cable Preparation

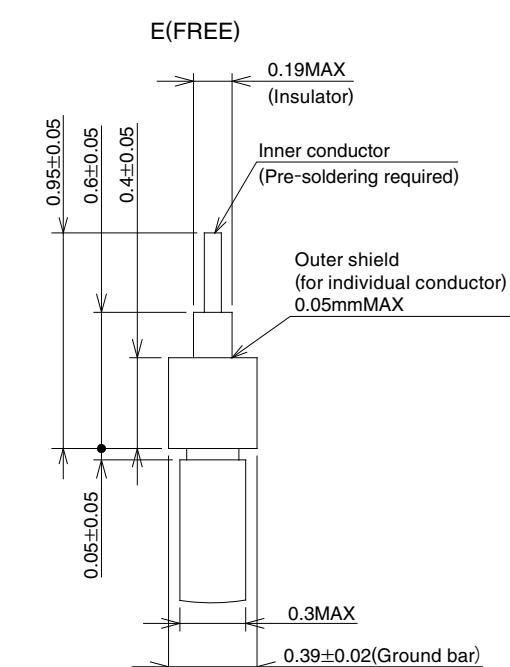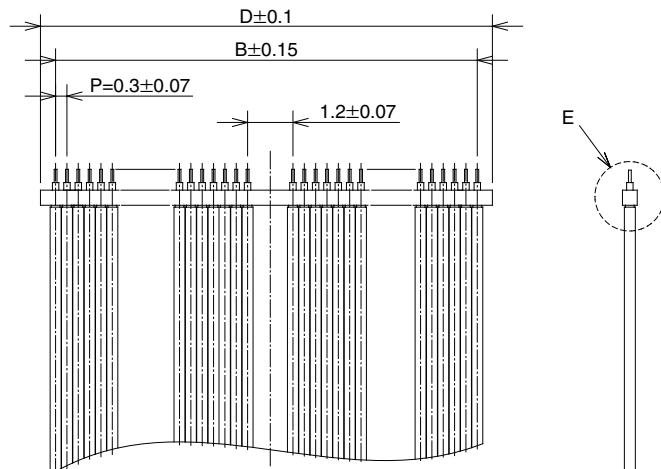

Note 1 : Contact Hirose for Termination Procedures.

■ Metal cover

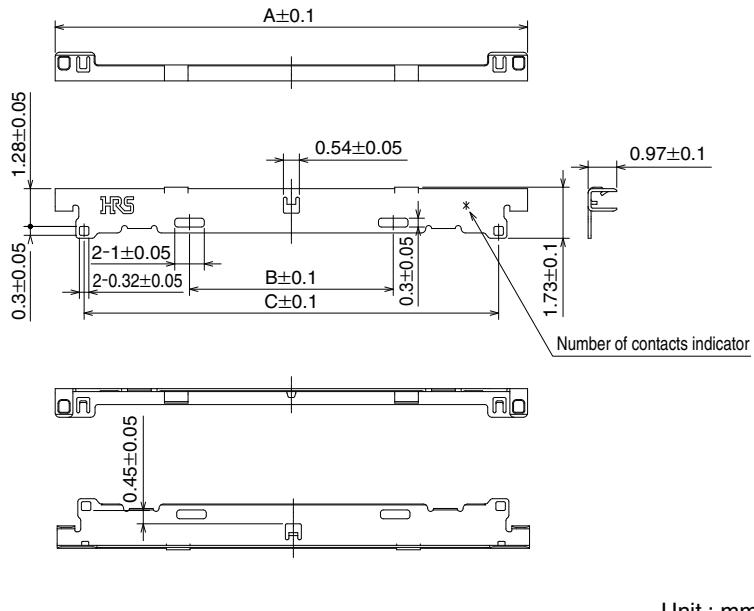


Unit : mm

| Part No. | HRS No. | No. of contacts | A | B | C |
|--------------|------------|-----------------|-------|------|-------|
| DF56-26P-SHL | 662-5605-4 | 26 | 11.80 | 3.90 | 9.84 |
| DF56-30P-SHL | 662-5618-6 | 30 | 13.00 | 3.90 | 11.04 |
| DF56-40P-SHL | 662-5602-6 | 40 | 16.00 | 6.90 | 14.04 |
| DF56-50P-SHL | 662-5608-2 | 50 | 19.00 | 7.50 | 17.04 |


Note 1 : Tape and reel packaging (10,000 pcs/reel). Order by number of reels.

◆ Packaging Specification

● Embossed Carrier Tape Dimensions—Receptacles

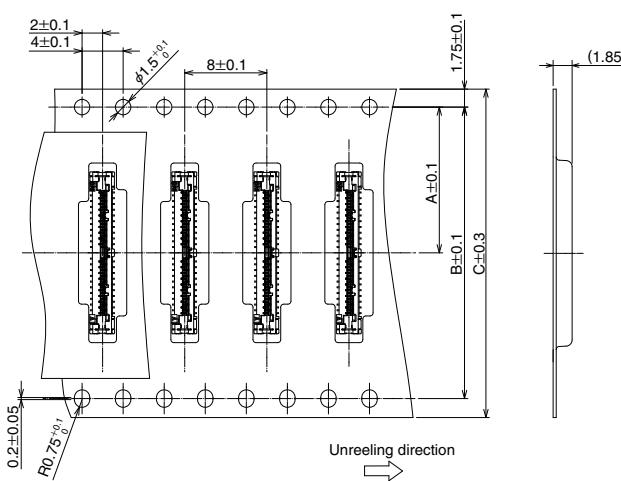

● Reel Dimensions

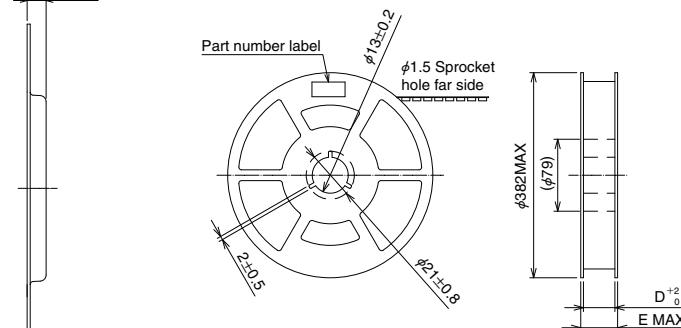

Unit : mm


| Part No. | HRS No. | No. of contacts | A | B | C | D | E |
|-------------------|---------------|-----------------|------|------|------|------|------|
| DF56-40S-0.3V(**) | 662-5600-0 ** | 40 | 14.2 | 28.4 | 32.0 | 32.4 | 38.4 |
| DF56-50S-0.3V(**) | 662-5606-7 ** | 50 | | | | | |

Note : When the number of contacts is 30 or less, the feed holes are only on one side of the tape. (Top of figure φ1.5 hole only)

◆Embossed tape dimensions (JIS C 0806 compliant).....Stand-off type

●Receptacles

●Reel Dimensions

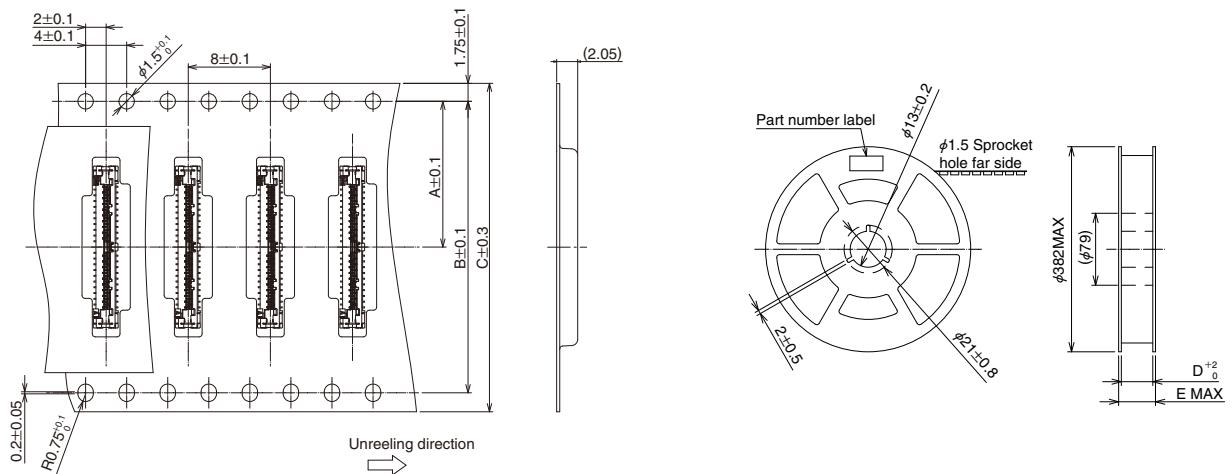

Unit : mm


| Part No. | HRS No. | No. of contacts | A | B | C | D | E |
|--------------------|---------------|-----------------|------|------|------|------|------|
| DF56C-26S-0.3V(**) | 662-5603-9 ** | 26 | 11.5 | — | 24.0 | 24.4 | 30.4 |
| DF56C-30S-0.3V(**) | 662-5616-0 ** | 30 | | | | | |
| DF56C-40S-0.3V(**) | 662-5619-9 ** | 40 | 14.2 | 28.4 | 32.0 | 32.4 | 38.4 |

Note : When the number of contacts is 30 or less, the feed holes are only on one side of the tape. (Top of figure $\phi 1.5$ hole only)

◆Packaging Specification

●Embossed Carrier Tape Dimensions—Plugs

●Reel Dimensions

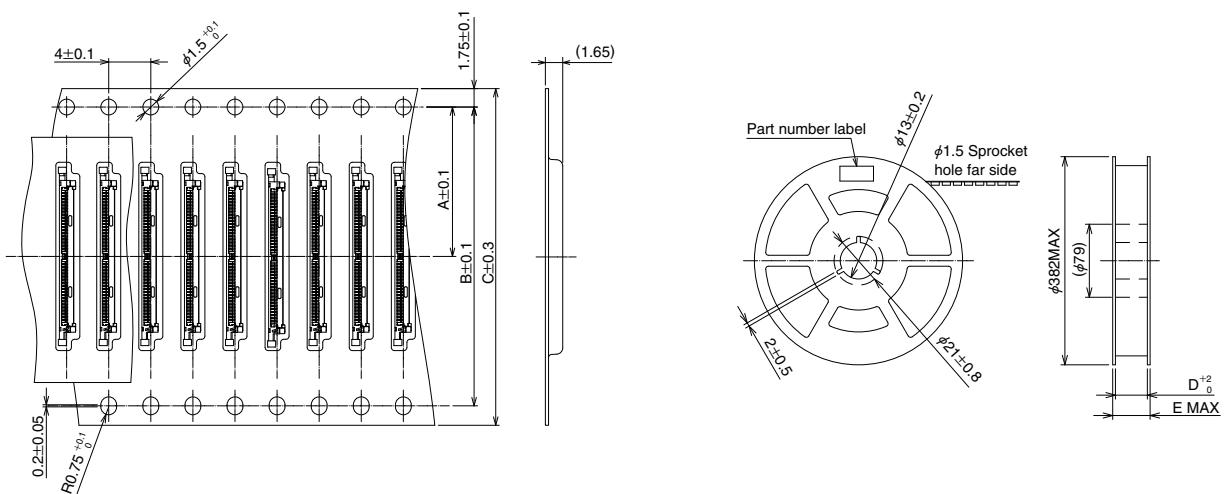


Unit : mm

| Part No. | HRS No. | No. of contacts | A | B | C | D | E |
|--------------------|---------------|-----------------|------|------|------|------|------|
| DF56-26P-0.3SD(**) | 662-5604-1 ** | 26 | | | | | |
| DF56-30P-0.3SD(**) | 662-5617-3 ** | 30 | 14.2 | 28.4 | 32.0 | 32.4 | 38.4 |
| DF56-40P-0.3SD(**) | 662-5601-3 ** | 40 | | | | | |
| DF56-50P-0.3SD(**) | 662-5607-0 ** | 50 | | | | | |



◆ Extraction tool

For details about the extraction tool, please contact your Hirose sales representative.

◆ Usage Recommendations
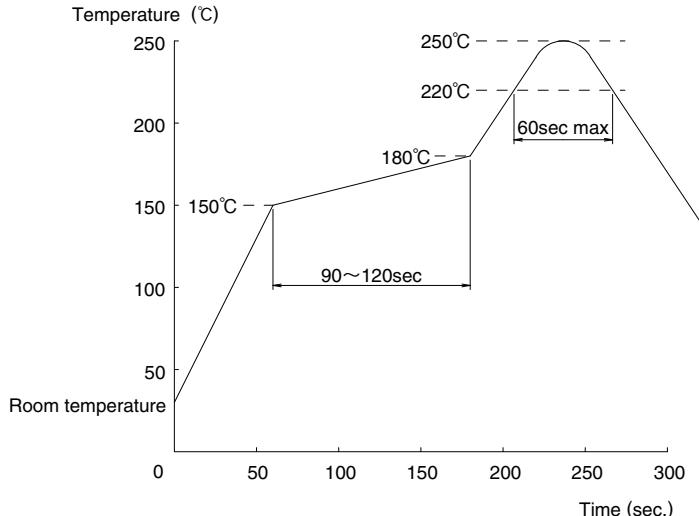
| | |
|---|---|
| <p>1. Recommended temperature profile</p> |  <p>Applicable Conditions</p> <ol style="list-style-type: none"> 1. Peak Temperature : 250°C max. 2. Heating : 220°C min. for 60 seconds max. 3. Pre-heating : 150 to 180°C for 90 to 120 seconds. 4. Number of cycles : Up to 2 cycles <p>*Solder composition : Sn-3Ag-0.5Cu</p> <p>(Note 1) Values in this temperature profile are one of the recommendations.</p> |
| <p>2. Recommended manual soldering</p> | <p>Temperature of the soldering iron : 350°C max. Soldering time : 3 seconds max.</p> |
| <p>3. Recommended screen thickness and open area ratio (Pattern area ratio)</p> | <p>Standard thickness 0.1mm C: Stand-off type Opening ratio : Lead 100%, ground 100% None: Standard type Opening ratio : Lead 60%, ground 100%</p> |
| <p>4. Board warpage</p> | <p>Maximum of 0.02mm at the connector center, with both ends of the connector as reference points.</p> |
| <p>5. Cleaning conditions</p> | <p>IPA (Isopropyl Alcohol) cleaning is permitted. (Cleaning is not recommended as it may change the feel of the mating and un-mating of the connector. Please contact your Hirose sales representative for information if you plan to use any other cleaning agents.)</p> |

◆Precautions
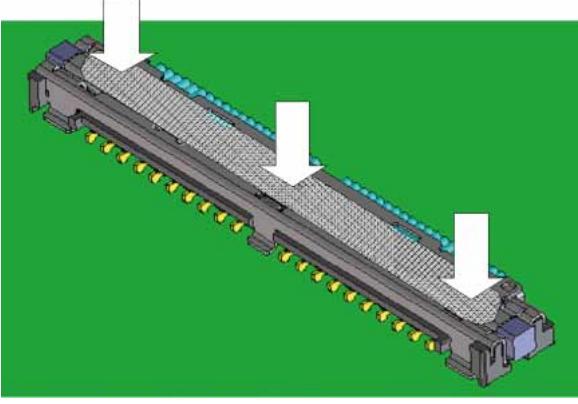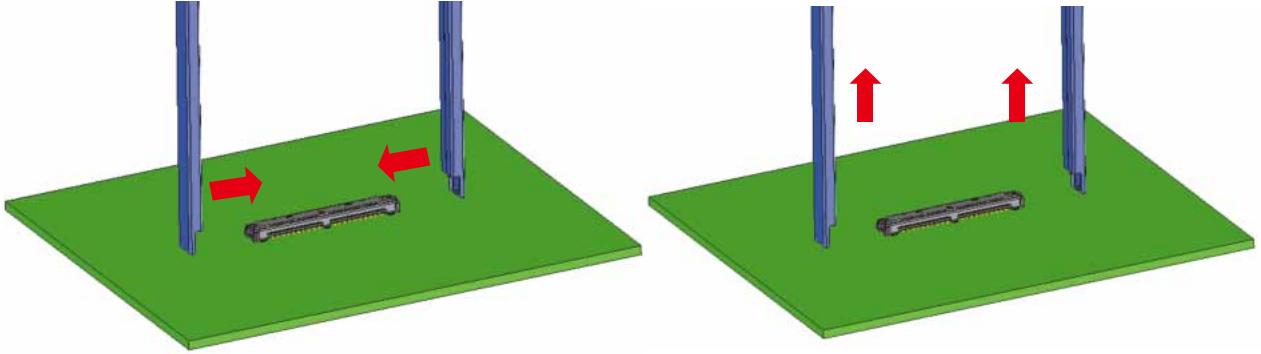
| Precautions |
|---|
| <p>■Mating</p> <p>Mate the plug with receptacle by pressing straight against the entire plug surface. Do NOT mate the plug while holding by the terminated cable.</p>  <p>■Un-mating</p> <p>Use a dedicated extraction tool to un-mate the plug. Insert the tool under either end of the plug and pull straight up as illustrated.</p>  <p>■Do not mate / un-mate the connectors when receptacle is not mounted on the board.</p> <p>■In the manual soldering process, don't carry out the flux coating which will cause a flux blister on the connector.</p> <p>■Excessive scoop insertion or extraction may result in damage.</p> |

MEMO :

USA:

HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE
 2300 Warrenville Road, Suite 150,
 Downers Grove, IL 60515
 Phone : +1-630-282-6700
<http://www.hirose.com/us/>

USA:

HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE
 2841 Junction Ave, Suite 200
 San Jose, CA. 95134
 Phone : +1-408-253-9640
 Fax : +1-408-253-9641
<http://www.hirose.com/us/>

USA:

HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)
 17197 N. Laurel Park Drive, Suite 253,
 Livonia, MI 48152
 Phone : +1-734-542-9963
 Fax : +1-734-542-9964
<http://www.hirose.com/us/>

USA:

HIROSE ELECTRIC (U.S.A.), INC. BOSTON OFFICE
 300 Brickstone Square Suite 201,
 Andover, MA 01810
 Phone : +1-978-662-5255

THE NETHERLANDS:

HIROSE ELECTRIC EUROPE B.V.
 Hogehillweg #8 1101 CC Amsterdam Z-O
 Phone : +31-20-6557460
 Fax : +31-20-6557469
<http://www.hirose.com/eu/>

GERMANY:

HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH
 Schoenbergstr. 20, 73760 ostfildern
 Phone : +49-711-456002-1
 Fax : +49-711-456002-299
<http://www.hirose.com/eu/>

GERMANY:

HIROSE ELECTRIC EUROPE B.V. NUERMBERG OFFICE
 Neumeyerstrasse 22-26, 90411 Nurnberg
 Phone : +49-911 32 68 89 63
 Fax : +49-911 32 68 89 69
<http://www.hirose.com/eu/>

GERMANY:

HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE
 Bayernstr. 3, Haus C 30855 Langenhagen, Germany
 Phone : +49-511 97 82 61 30
 Fax : +49-511 97 82 61 35
<http://www.hirose.com/eu/>

FRANCE:

HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE
 Regus La Garenne Colombes, Place de La Belgique,
 71 Boulevard National La Garenne Colombes, 92250, France
 Phone : +33 (0) 1 7082 3170
 Fax : +33 (1) 7082 3101
<http://www.hirose.com/eu/>

UNITED KINGDOM:

HIROSE ELECTRIC EUROPE BV (UK BRANCH)
 4 Newton Court, Kelvin Drive, Knowhill,
 Milton Keynes, MK5 8NH
 Phone : +44-1908 202050
 Fax : +44-1908 202058
<http://www.hirose.com/eu/>

CHINA:

HIROSE ELECTRIC (SHANGHAI) CO., LTD.
 18, Enterprise Center Tower 2, 209# Gong He
 Road, Jing'an District, Shanghai, CHINA 200070
 Phone : +86-21-6391-3355
 Fax : +86-21-6391-3335
<http://www.hirose.com/cn/>

CHINA:

HIROSE ELECTRIC (SHANGHAI) CO., LTD. BEIJING BRANCH
 A1001, Ocean International Center, Building 56# East 4th
 Ring Middle Road, ChaoYang District, Beijing, 100025
 Phone : +86-10-5165-9332
 Fax : +86-10-5908-1381
<http://www.hirose.com/cn/>

CHINA:

HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.
 Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre,
 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008
 Phone : +86-755-8207-0851
 Fax : +86-755-8207-0873
<http://www.hirose.com/cn/>

HONG KONG:

HIROSE ELECTRIC HONGKONG TRADING CO., LTD.
 Room 1001, West Wing, Tsim Sha Tsui Centre, 66
 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong
 Phone : +852-2803-5338
 Fax : +852-2591-6560
<http://www.hirose.com/hk/>

TAIWAN:

HIROSE ELECTRIC TAIWAN CO., LTD.
 103 8F, No.87, Zhengzhou Rd., Taipei
 Phone : +886-2-2555-7377
 Fax : +886-2-2555-7350
<http://www.hirose.com/tw/>

KOREA:

HIROSE KOREA CO., LTD.
 143, Gongdan 1-daero, Siheung-si,
 Gyeonggi-do, 15084, Korea
 Phone : +82-31-496-7000
 Fax : +82-31-496-7100
<http://www.hirose.co.kr/>

SINGAPORE:

HIROSE ELECTRIC SINGAPORE PTE. LTD.
 03, Anson Road, #20-01, Springleaf Tower,
 Singapore 079909
 Phone : +65-6324-6113
 Fax : +65-6324-6123
<http://www.hirose.com/sg/>

INDIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD. DELHI LIAISON OFFICE
 Office NO.552, Regus-Green Boulevard, Level5, Tower C,
 Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India
 Phone : +91-12-660-8018
 Fax : +91-120-4804949
<http://www.hirose.com/sg/>

INDIA:

HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE
 Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma
 Gandhi (MG) Road, Bangalore 560 001, Karnataka, India
 Phone : +91-80-4120 1907
 Fax : +91-80-4120 9908
<http://www.hirose.com/sg/>

MALAYSIA:

PENANG REPRESENTATIVE OFFICE
 73-3-1, Ideal@The One, Jalan Mahsuri, Bayan
 Lepas Penang, 11950, Malaysia
 Phone : +604-648-5536
<http://www.hirose.com/sg/>

THAILAND:

BANGKOK OFFICE (REPRESENTATIVE OFFICE)
 Unit 4703, 47th FL., 1 Empire Tower, South Sathorn
 Road, Yannawa, Sathorn, Bangkok 10120 Thailand
 Phone : +66-2-686-1255
 Fax : +66-2-686-3433
<http://www.hirose.com/sg/>

**HIROSE ELECTRIC CO., LTD.**

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN
 TEL: +81-45-620-3526 Fax: +81-45-591-3726
<http://www.hirose.com>
<http://www.hirose-connectors.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

[DF56-40S-0.3V\(51\)](#) [DF56-40P-SHL](#) [DF56-50S-0.3V\(51\)](#) [DF56-50P-0.3SD\(51\)](#) [DF56-50P-SHL](#) [DF56J-40P-SHL](#)
[DF56J-26P-SHL](#) [DF56-26P-0.3SD\(51\)](#) [DF56C-26S-0.3V\(51\)](#) [DF56-26P-SHL](#) [DF56-40P-0.3SD\(51\)](#) [DF56CJ-26S-0.3V\(51\)](#) [DF56J-40S-0.3V\(51\)](#) [DF56C-26S-GUIDE](#) [DF56-30P-SHL](#) [DF56-30P-0.3SD\(51\)](#) [DF56C-30S-0.3V\(51\)](#)
[DF56-50P-0.3SD\(53\)](#) [DF56-50S-0.3V\(53\)](#) [DF56C-50S-0.3V\(51\)](#) [DF56C-40S-0.3V\(51\)](#)