Distinctive Characteristics

Brilliant illumination for highly visible status indication with LEDs and caps in red, green, or amber; subdued illumination for low light requirements with white cap over red, green, or amber LEDs.


Photo interrupter, rather than contacts, ensures high reliability and long life of 3 million operations minimum.

Rugged construction and smooth actuation allow repeated, rapid actuation force anywhere on cap surface.

Snap-in mounting for easy installation.

Connector socket with 6 pins for simple connection.

Well suited for gaming and vending machines, as well as equipment exposed to corrosive gases used in environments such as chemical or steel manufacturing plants.

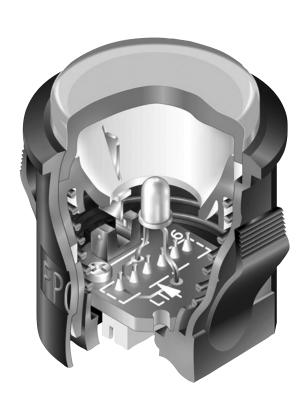







Contact factory for custom options

Ė

Supplement | Accessories

TYPICAL SWITCH ORDERING EXAMPLE **FP01 Photo Transistor** Receptacle **LEDs** Shape 6-pin Socket Single C Round C1 C Red See Connector. D Amber F Green **Actuator Colors Photo Interrupter** Housing Connector Unshaded (Shaded) Black White **Assembled Connector** C2 with Wire Leads (Momentary C Red Operating Function) **Unassembled Connector** D Amber * C3 and Pins F Green No Code No Connector * Available in Americas only

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE FP0115CAC1FF



	ACTUATOR & INTERRUPTER							
Actuator Position Photo Interrupter					Schematics			
Model	1	Normal	Down	Unshaded 5	Shade Iormally Unshaded wit Nomentary Shaded stat		LED connector pins are 5 & 6; interrupter connector pins are 3-4 & 1-2.	-
FP0115	Single Photo Transistor		shaded, the p al function wl its state.	noto transistor momentarily activates ich signals the external device to			6 0 0 5 4 0 0 3 2 0 7 0 1	

HOUSING SHAPE & COLOR

RECEPTACLE




Round Shape



Black Housing



6-pin Socket





Ė Touch Supplement | Accessories

not available separately. The electrical specifications shown are determined at a basic temperature of 25°C.	Ε÷
If the source voltage exceeds the rated voltage, a ballast	Where

LEDs are an integral part of the switch and

resistor is required.

E T	V _F Z	Anode Cathode
F	$R = \frac{E - V_F}{I_F}$	
Where: R	R = Resistor Vo	lue (Ohms)

	Г
Vhere:	R = Resistor Value (Ohms
	E = Source Voltage (V)
	$V_F = Forward Voltage (V)$
	I _F = Forward Current (A)

Single Element LED		С	D	F
	Color	Red	Amber	Green
Forward Peak Current	I _{FM}	30mA	25mA	25mA
Typical Forward Current	I _F	20mA	20mA	20mA
Forward Voltage	V _F	1.85V	2.0V	2.25V
Reverse Peak Voltage	V_{RM}	5V	5V	5V
Current Reduction Rate Above 25°C	$\Delta I_{_{\rm F}}$	0.38mA /°C	0.28mA /°C	0.40mA /°C
Ambient Temperature Range		_	-25° ~ +50°	С

SWITCH SPE	SWITCH SPECIFICATIONS				
	Actuator Up	Actuator Down			
Status of Photo Interrupter:	Unshaded	Shaded			
Collector Current I _c :	0.8mA minimum	10µA maximum			
Status of Photo Transistor:	On	Off			

Output Condition of Photo Transistor:	$I_F = 20 \text{mA} \& V_{CE} = 5 \text{V}$

MECHANICAL SPECIFICATIONS

Total Travel: .079" (2.0mm) 0.75 N (.169 lbf) **Operating Force:**

Mechanical Life: 3,000,000 operations minimum

-25°C through +50°C (-13°F through +122°F) **Operating Temperature Range:**

MATERIALS

Actuator: Polyacetal Housing: Polyamide

PHOTO INTERRUPTI	(Temperature @ 25°C)		
Electrical & Optical Characteristics	Typical	Maximum	Condition
Input			
Forward Voltage V _r :	1.3V	1.6V	$I_F = 50 \text{mA}$
Reverse Current I _R :		10µA	$F_R = 5V$
Transmission			
Collector Emittor Saturation Voltage V. satu		0.4\/	I _ 20m A & I _ 0 1m A

Collector-Emitter Saturation Volto	age V _{CE} sat:	0.4V	$I_F = 20 \text{mA} \& I_C = 0.1 \text{mA}$

Absolute Maximum Ratings


Input LED	Output Photo Transistor			
Forward Current I _F :	50mA	Collector-Emitter Voltage V _{CEO} :	30V	
Reverse Voltage V _R :	5V	Emitter-Collector Voltage V_{ECO} :	4.5V	
Power Dissipation P _D :	80mW	Collector Current I _c :	30mA	

Collector Dissipation P_c: 80mW

Circuit Design Considerations

Output of the infrared LED in the photo interrupter decreases approximately 50% after 100,000 hours.

Recommended load resistance (RL) is $40k \sim 120k\Omega$ for the illustrated circuit.



LED COLORS & SPECIFICATIONS

D7

ACTUATOR COLORS

White



Red



Amber



Green

CONNECTOR OPTIONS

C2

AT021 **Assembled Connector** with Wire Leads

Connector body: JST model ZHR-6 Crimp connector pins: JST model SZH-002T-P0.5 Wire leads: 28-26AWG; 12-inch, unstripped;

Blue for Pin 1






AT022 **Unassembled Connector** and Pins

1 connector and 8 crimp connector pins only (no wire leads provided).

Matching wire leads: 28-26AWG

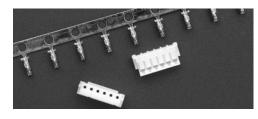

No Code


No Connector


Recommended connector for assembly:


JST model number ZHR-6

Recommended crimp connector pins: JST model SZH-002T-P0.5 for 28-26AWG wire leads or SZH-003T-P0.5 for 32-28AWG wire leads.


TYPICAL SWITCH DIMENSIONS















FP0115CAC1FF

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for FP01 Cap



Recommended Methods:

Screen Print on cap. Epoxy based ink is recommended.



Shaded area is printable area.



www.nkk.com