





CIRCUIT: SPST
SCHEMATIC

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
5. OPERATING FORCE: 160 $\pm$ 50gf
- ▲ 6. TRAVEL: 0.2mm $\pm$ 0.1
7. CONTACT RESISTANCE: 500 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 160g > 100,000 CYCLES
9. SILVER CONTACTS
10. PACKAGING: TAPE & REEL; 2000 PIECES PER REEL.
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

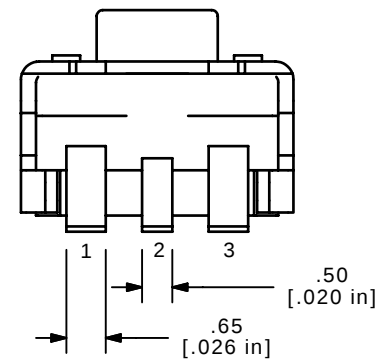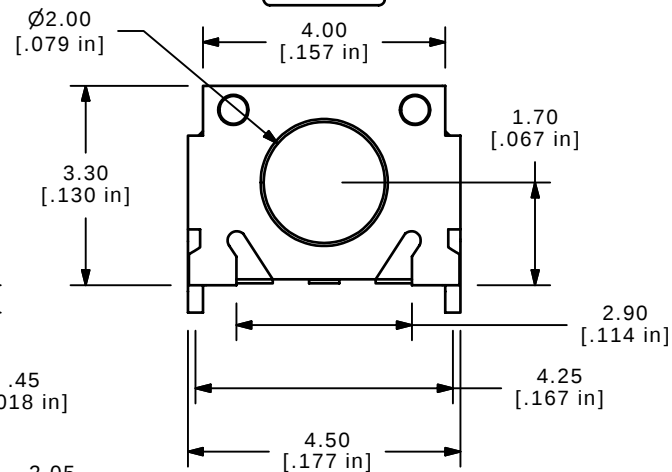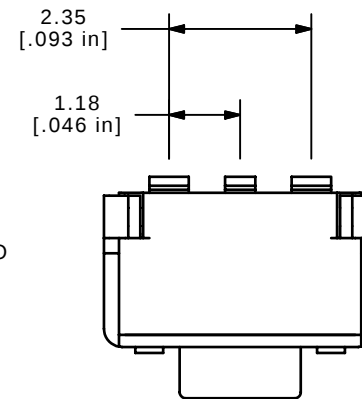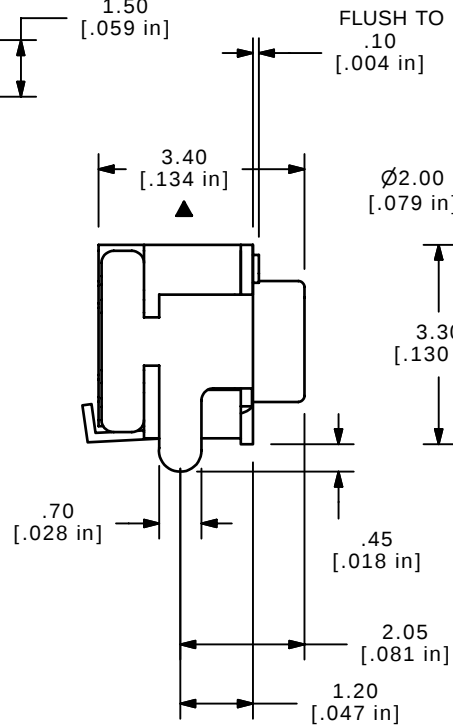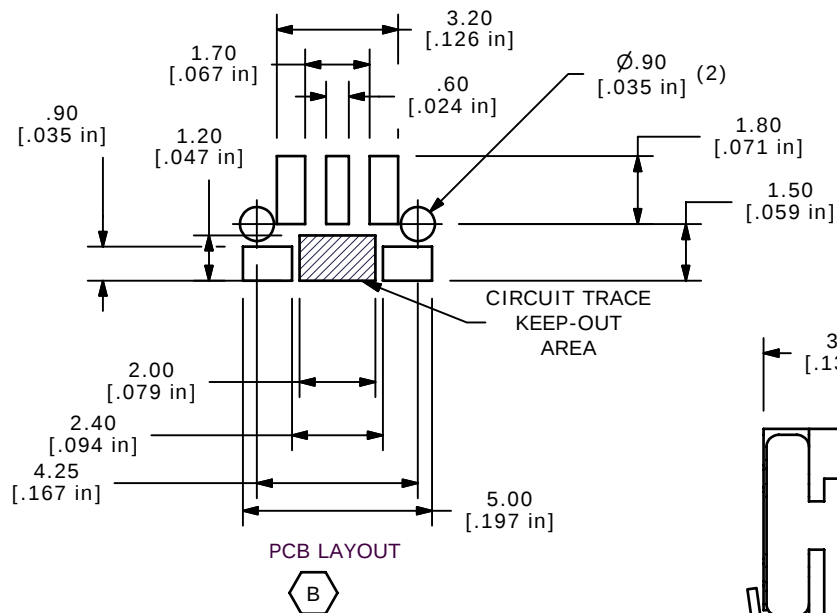

E-SWITCH™

B	17914	OVERRIDE (5x) DIMS IN PCB LAYOUT	1/7/08	BLR
A	17599	RELEASED FOR PRODUCTION	8/28/07	RC
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3340AF160QG

SCALE 8:1

DATE 1/7/2008

DR RC

DWG P021301

REV B