

Model

KLS-150A-RH

RoHS COMPLIANT


12 Volt Input

Dual Tube CCFT Inverter

Brightness Control

Physical Specifications

Dimensions:	120mm x 40mm x 10.0mm (4.72" x 1.57" x 0.39")
Operating Temp:	0 to 60°C, convection cooling
Relative Humidity:	20% to 90%, non-condensing
Storage:	-20 to 85°C/5-95% RH non-condensing
Impact Resistance:	50G half wave per 2 msec
Vibration Resistance:	10-55-10 Hz/min @ 1.5mm

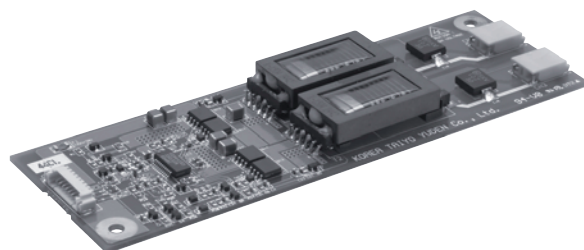

Input Specifications*

Item	Condition	Standard
Input Voltage	—	12 Vdc
Rated Tolerance	Continuous Operation	10.8 V - 13.2 V
	Starting Condition (Discharge Starting Voltage)	10.8 V - 13.2 V
Max. Input Current	V _{IN} = 12 Vdc Luminance @ Max.	1.2 A Typ.
Max. Input Power	V _{IN} = 12 Vdc Luminance @ Max.	16 W Max.
DC-Bright	I _{OUT} = Max I _{OUT} = Min	3.3 V 0 V
On/Off Input Current	On V _{CONT} = 3.0 – 5.0 V	I _{MAX} = 0.1 mA
	Off V _{CONT} = GND-0.8 Vdc	I _{MAX} = 16 µA

*Above Specifications Occur @ 25 ± 5°C

Output Specifications*

Item	Condition	Standard		
		MIN	TYP	MAX
Output Voltage (Vrms)	V _{IN} = 12 Vdc	—	930	—
Starting Voltage (Vrms)	V _{IN} = 10.8 Vdc	2000	—	—
Tube Current for per Lamp (mAmps)	Luminance @ Max. (High)	—	6.5	—
	Luminance @ Max. (Low)	—	4.0	—
	Luminance @ Min. (High)	—	3.0	—
	Luminance @ Min. (Low)	—	2.0	—
Max. Power Output for 2 Lamps (W)	V _{IN} = 12 Vdc/Luminance @ Max.	—	13	—
Ignition Frequency (kHz)	Luminance @ Max.	40	55	80


*Above specifications occur @ 25 ± 5°C.

Model

KLS-150A-RH

Luminance Variance

Item	Condition	Applied Voltage	Output Current
Luminance @ Max. (High)		Vbr= 3.3 V, Vsel = 5.0 V	6.5 mA (one lamp)
Luminance @ Max. (Low)		Vbr= 3.3 V, Vsel = 0 V	4 mA (one lamp)
Luminance @ Min. (High)		Vbr= 0 V, Vsel = 5.0 V	3 mA (one lamp)
Luminance @ Min. (Low)		Vbr= 0 V, Vsel = 0 V	2 mA (one lamp)

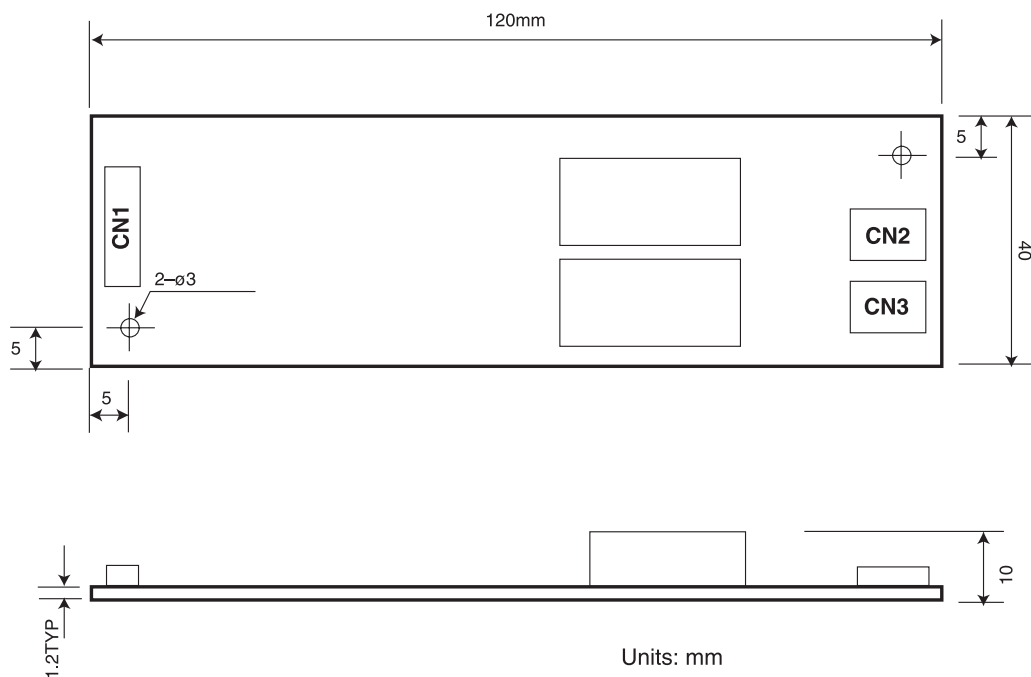

© Copyright 2007 TAIYO YUDEN (U.S.A.), INC. Specifications subject to change without notice.


TAIYO YUDEN

TAIYO YUDEN (U.S.A.), INC.
440 Stevens Avenue, Suite 300 Solana Beach, CA 92075
(858) 350-6800 / Fax: (858) 350-6854
(800) 263-4532 www.t-yuden.com inverters@t-yuden.com



FM 32227


Connection Diagram

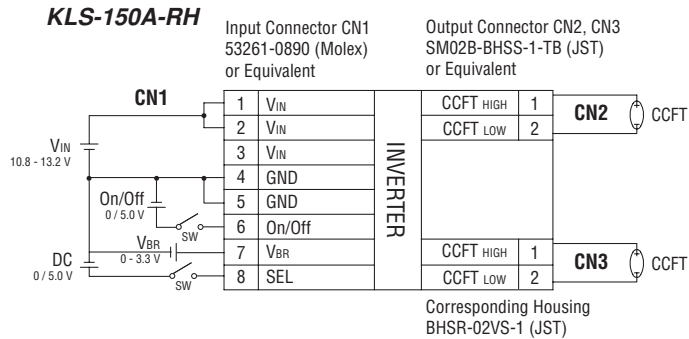


DC Brightness Control Method*

Maximum output current can be adjusted by applying bias voltage or using a variable resistor as shown below.


$I_{out} = 6.5\text{mA}$
($V_{in} = 12\text{V}$,
On/Off = 5V,
 $V_{br} = 3.3\text{V}$,
 $V_{sel} = 5\text{V}$)

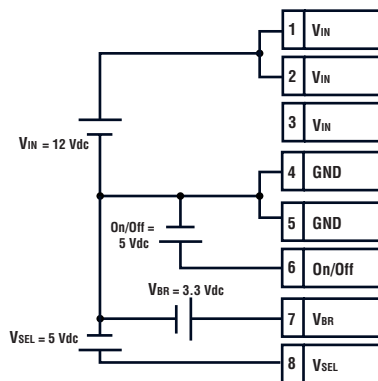

$I_{out} = 4\text{mA}$
($V_{in} = 12\text{V}$,
On/Off = 5V,
 $V_{br} = 3.3\text{V}$,
 $V_{sel} = 0\text{V}$)

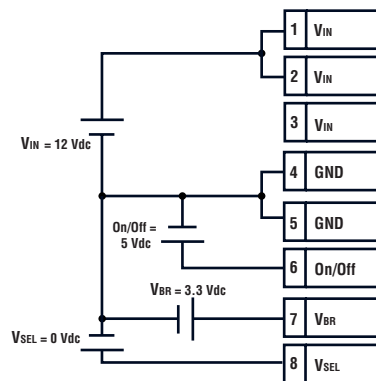

$I_{out} = 3\text{mA}$
($V_{in} = 12\text{V}$,
On/Off = 5V,
 $V_{br} = 0\text{V}$,
 $V_{sel} = 5\text{V}$)

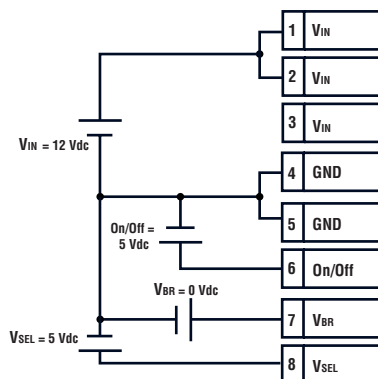

$I_{out} = 2\text{mA}$
($V_{in} = 12\text{V}$,
On/Off = 5V,
 $V_{br} = 0\text{V}$,
 $V_{sel} = 0\text{V}$)

