

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

5.0 AMP CURRENT SENSOR

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CATALOG LISTING
CSD1EC
PAGE 1 OF 1

3
ISSUE

REVISIONS	
A	CO-95704
DLM 13 MAR 00	

--	--

TEK
DRAWN

FOR

RELEASE NO. DR-3709-2

CHECK

Y
C
E
H
C

00

13 M



SAV

CHECK



AR C

13

D



SUGGESTED HOLE CENTERS
SCALE 2:1
COMPONENT SIDE

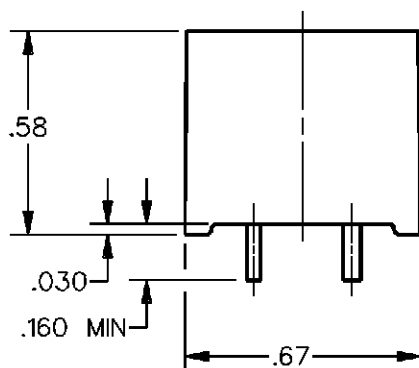

CHARACTERISTICS	
SUPPLY VOLTAGE	4.5 TO 24 VOLTS
SUPPLY CURRENT	22mA MAX, 16mA TYP
TEMPERATURE	-25 TO 85°C
CURRENT: OPERATING	5.0 AMPS±5% (25°C)
RELEASE	3.8 AMPS MIN (25°C)
MAX CONTINUOUS	20 AMPS
OUTPUT CURRENT	40mA MAX SINK
V _{sat}	.4 VOLTS MAX
RESISTANCE	5 mΩ
INDUCTANCE	4 μH

NOTE
1 - ELECTRICAL CONNECTIONS INDICATED ON
BOTTOM OF DEVICE



THIRD ANGLE PROJECTION		
		DO NOT SCALE PRINT
SCALE	2:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±
WEIGHT		