

PRELIMINARY

Notice : This is not a final specification
Some parametric limits are subject to change.

MITSUBISHI SEMICONDUCTOR <GaAs MMIC>

MGFC5213

K-Band 2-Stage Power Amplifier


DESCRIPTION

The MGFC5213 is a GaAs MMIC chip especially designed for 27.5 ~ 30.0 GHz band High Power Amplifier (HPA) .

FEATURES

- RF frequency : 27.5 to 30.0 GHz
- Linear gain : ≥ 9 dB
- P1dB : ≥ 29 dBm
- DC power : $V_d = 5$ V, $I_{d1} + I_{d2} = 1080$ mA

BLOCK DIAGRAM

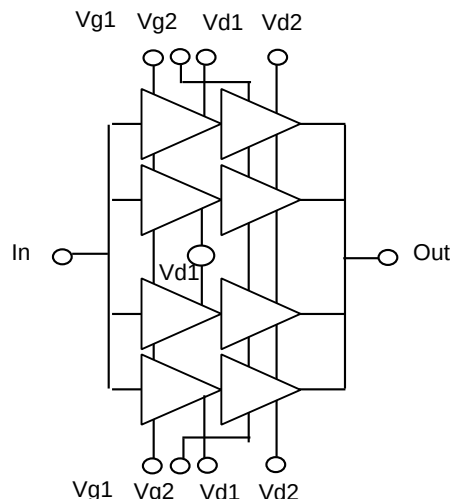

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Symbol	Parameter	Ratings	Units
Vd1, Vd2	Drain supply voltage	6	V
Vg1, Vg2	Gate supply voltage	-3 ~ 0.5	V
Id1	Drain current 1	480	mA
Id2	Drain current 2	960	mA
Pin	RF input power	25	dBm
Ta	Backside ambient temp.	-20 ~ +70	°C
Tstg	Storage temp.	-65 ~ +175	°C
Tmax	Maximum assembly temp.	+300	°C

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

Symbol	Parameter	Conditions	Limits			Units
			Min.	Typ.	Max.	
Gain	Gain	Vd = 5 V Id1 = 360 mA Id2 = 720 mA (RF off)	9.0			dB
VSWR in	Input VSWR				3.0	-
VSWR out	Output VSWR				3.0	-
P1dB	Output power at 1 dB compression point	f = 27.5, 30.0 GHz Single tone	29.0			dBm



MITSUBISHI
ELECTRIC

as of July '98

PRELIMINARY


Notice : This is not a final specification
Some parametric limits are subject to change.

MITSUBISHI SEMICONDUCTOR <GaAs MMIC>

MGFC5213

K-Band 2-Stage Power Amplifier

DIE SIZE AND BOND PAD LOCATION(UNIT : μM)

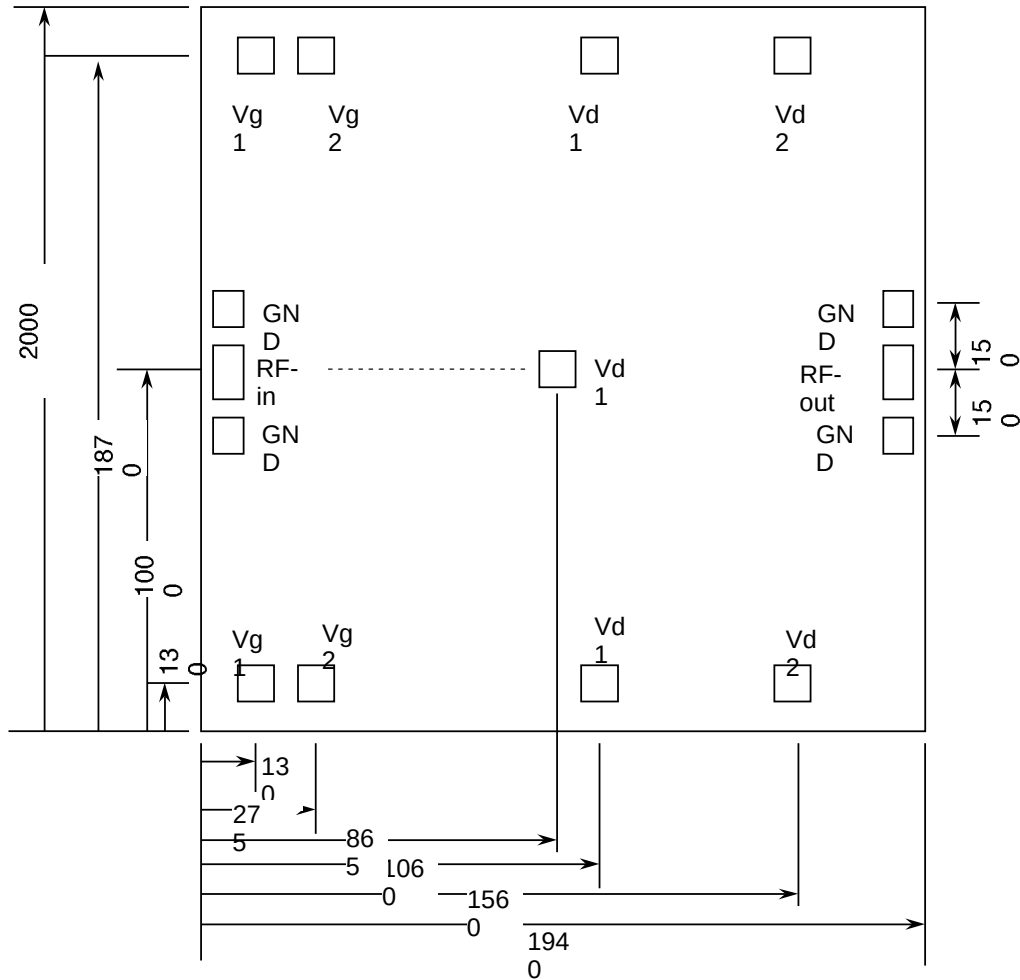

X Dimention 1.94 mm

Y Dimention 2.00 mm

PRELIMINARY

Notice : This is not a final specification
Some parametric limits are subject to change.


MITSUBISHI SEMICONDUCTOR <GaAs MMIC>

MGFC5213


K-Band 2-Stage Power Amplifier

TYPICAL CHARACTERISTICS

Small Signal Performances

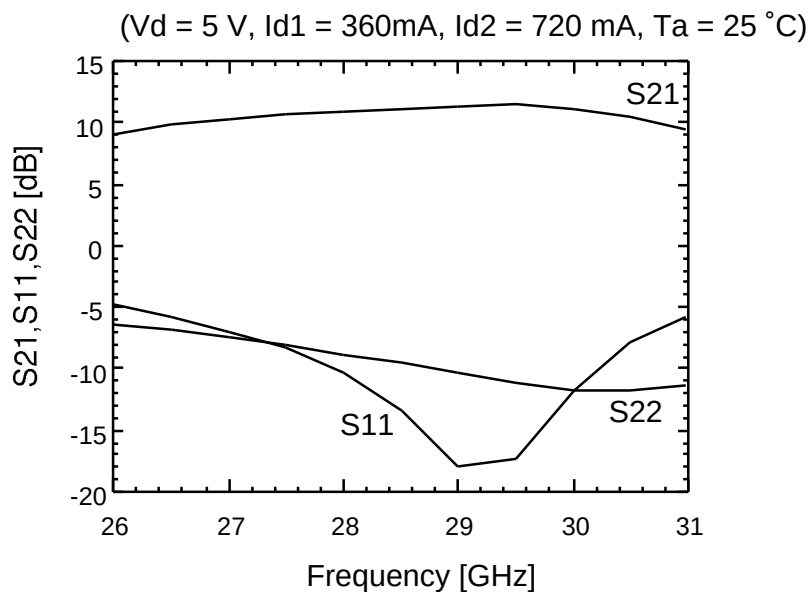

Output Power Performances

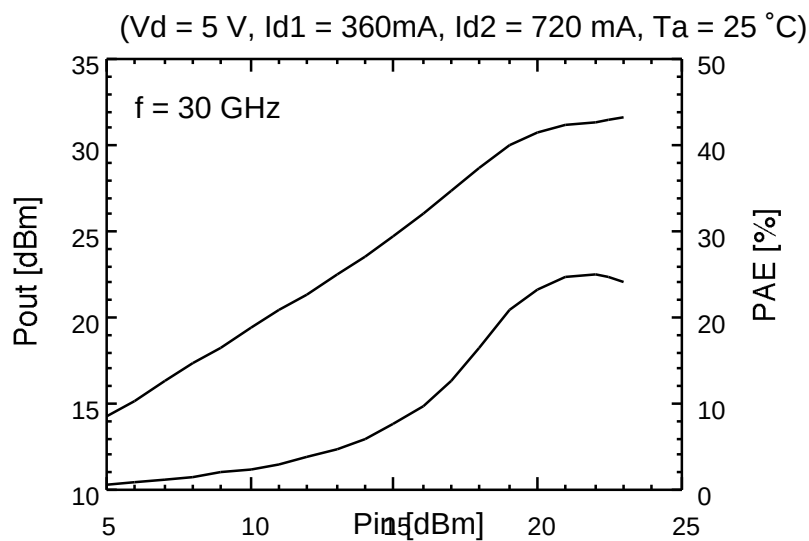

MITSUBISHI
ELECTRIC

as of July '98

PRELIMINARY


Notice : This is not a final specification
Some parametric limits are subject to change.

MITSUBISHI SEMICONDUCTOR <GaAs MMIC>

MGFC5213

K-Band 2-Stage Power Amplifier

AN EXAMPLE OF TEST CIRCUIT

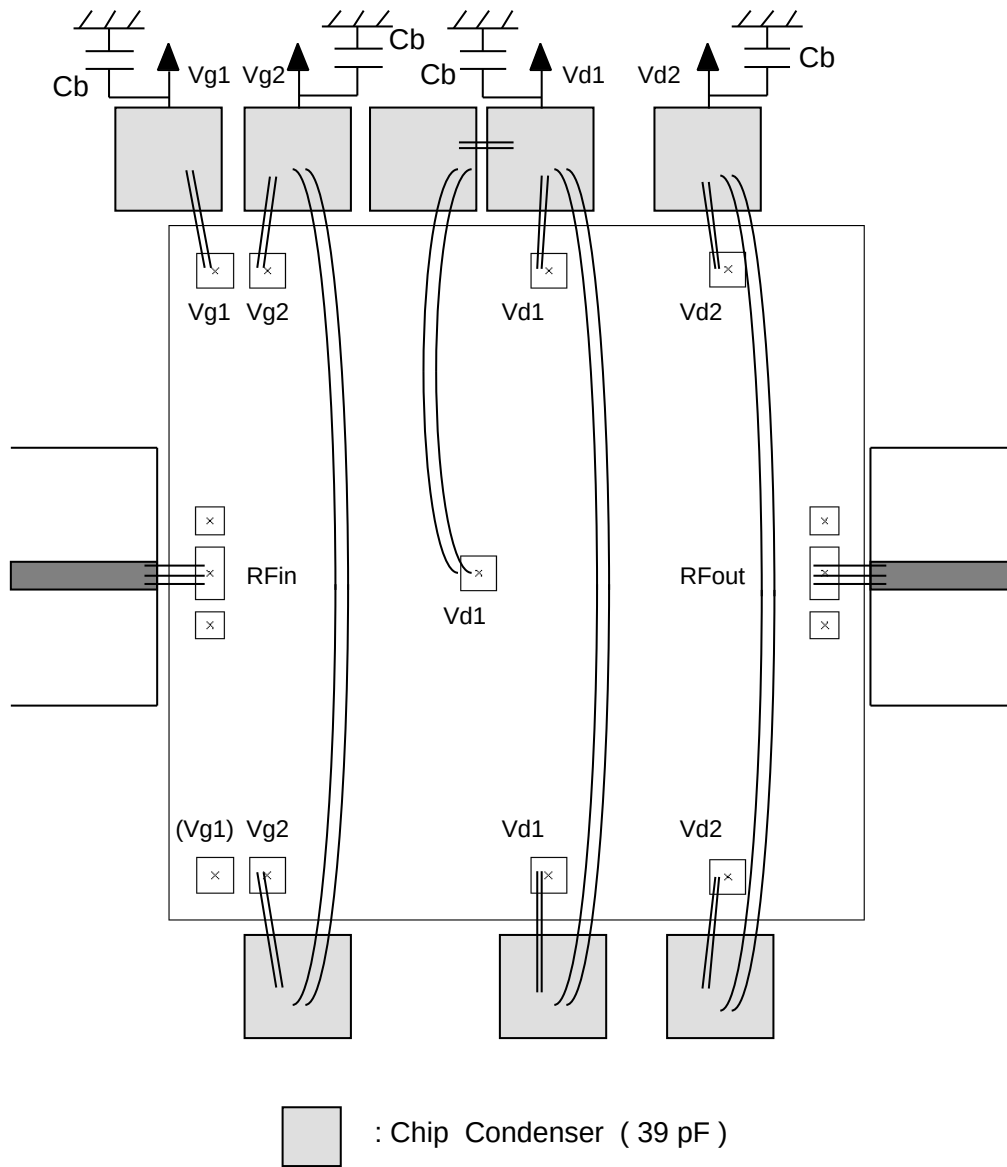

$C_b > 100 \mu F$