



| Description | Material | Finish |
|-------------|----------|--------|
| Body        | Brass    | Nickel |
| Socket      | Brass    | Gold   |
| Insulation  | PTFE     | N/A    |
| Crimp Ring  | Brass    | Nickel |

| REVISIONS |                       |           |      |
|-----------|-----------------------|-----------|------|
| REV       | DESCRIPTION           | DATE      | APPV |
| B         | Added New Title Block | 12-JUL-12 | SAH  |


SIDE VIEW

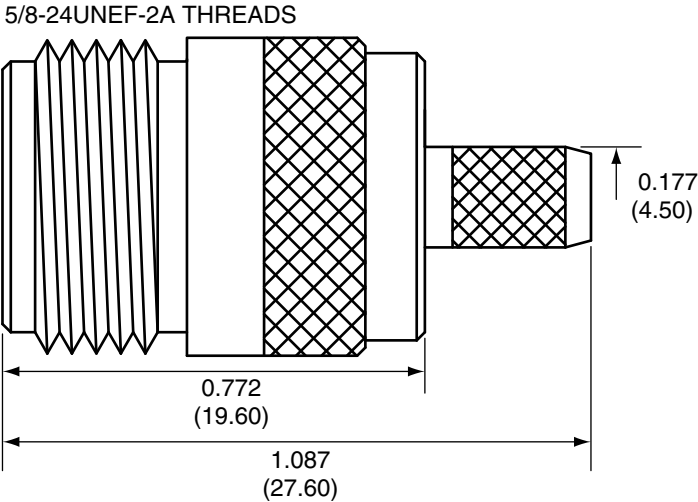


SOCKET

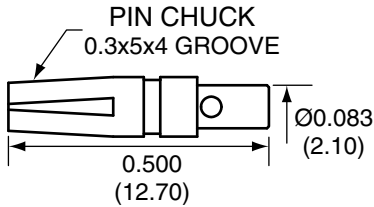

CRIMP RING



RECOMMENDED CABLE STRIPPING DIMENSIONS

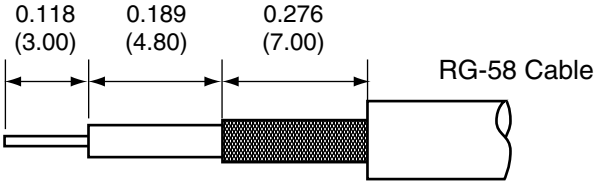

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- ALL DIMENSIONS ARE IN INCHES [mm].
  - DIMENSIONS APPLY AFTER FINISHING.
  - MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE.
  - SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

|           |                                                                                                                                                                                      |                                                                                                                     |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| MATERIAL: | TOLERANCES:<br>.020 [0.50]-.200 [5.00]= ±.008 [0.20]<br>.200 [5.00]-1.200 [30.00]= ±.016 [0.40]<br>1.20 [30.0]-4.75 [120.0]= ±.024 [0.60]<br>4.75 [120.0]-12.40 [315.0]= ±.040 [1.0] | PROJECTION:<br><br>ANGLES: ±1° |
|           | DRAWN: B.MURPHY<br>ENGR: S.HOGAN                                                                                                                                                     | DT: 12-JUL-12<br>DT: 12-JUL-12                                                                                      |

Linx

159 ORT LANE  
MERLIN, OR 97532

TITLE:  
N FEMALE CABLE END CRIMP  
FOR RG58 CABLE

| SIZE       | DWG. NO.             | REV          |
|------------|----------------------|--------------|
| A          | CONN011-R58          | B            |
| SCALE: 2:1 | DO NOT SCALE DRAWING | SHEET 1 OF 1 |

CONN011-R58 ASSEMBLY INSTRUCTIONS

- Solder the socket to the center conductor.
- Insert the socket, center conductor, and insulator into the body.
- Wrap the braid around the tail of the body and crimp the ring with a hex crimp tool labeled for use with RG-58 cable.