

ORDERING INFORMATION

Device	Temperature Range	Package
MC1420G	0°C to +70°C	Metal Can
MC1520F	-55°C to +125°C	Ceramic Flat
MC1520G	-55°C to +125°C	Metal Can

MC1420
MC1520


DIFFERENTIAL OUTPUT OPERATIONAL AMPLIFIER

A wide-band, general-purpose operational amplifier which features both differential inputs and outputs. Open loop gain is approximately 3000 V/V but may be adjusted with external feedback components. This device is particularly useful in applications which require differential outputs.

- Differential Input and Differential Output
- Wide Closed-Loop Bandwidth; 10 MHz
- Differential Gain; 70 dB
- High Input Impedance; 2.0 Megohms:
- Low Output Impedance; 50 ohms

OPERATIONAL AMPLIFIER

**SILICON MONOLITHIC
INTEGRATED CIRCUIT**





F SUFFIX
CERAMIC PACKAGE
CASE 606
(TO-91)

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Power Supply Voltage	V_{CC} V_{EE}	+8.0 -8.0	Vdc
Differential Input Signal	V_{in}	± 8.0	Vdc
Load Current	I_{L1}, I_{L2}	15	mA
Power Dissipation (Package Limitation)	P_D		
Metal Package		680	mW
Derate above $T_A = +25^\circ\text{C}$		4.6	mW/ $^\circ\text{C}$
Flat Package		500	mW
Derate above $T_A = +25^\circ\text{C}$		3.3	mW/ $^\circ\text{C}$
Operating Temperature Range	MC1520 MC1420	T_A -55 to +125 0 to +75	$^\circ\text{C}$
Storage Temperature Range		T_{stg} -65 to +150	$^\circ\text{C}$

FIGURE 1 - CIRCUIT SCHEMATIC

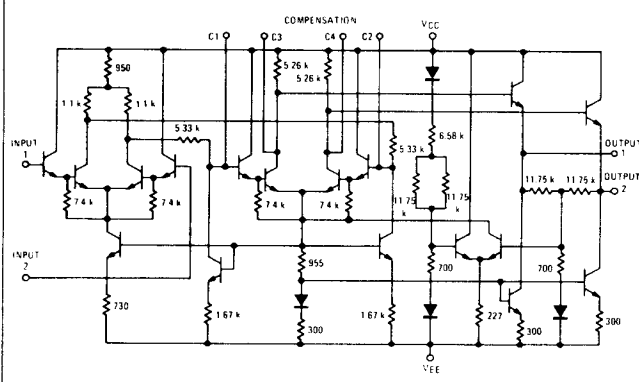

(TOP VIEW)
G SUFFIX
METAL PACKAGE
CASE 603

SINGLE-ENDED ELECTRICAL CHARACTERISTICS

(V_{CC} = +6.0 Vdc, V_{EE} = -6.0 Vdc, T_A = +25°C unless otherwise noted.¹)

Characteristic	Symbol	MC1520			MC1420			Unit
		Min	Typ	Max	Min	Typ	Max	
Open Loop Voltage Gain (T _{low} ② ≤ T _A ≤ T _{high} ②)	A _{vol}	1000 60	1500 64	—	750 —	1500 64	—	V/V dB
Output Impedance (f = 20 Hz)	Z _{os}	—	50	100	—	50	—	ohms
Input Impedance (f = 20 Hz)	Z _{is}	0.5	2.0	—	—	2.0	—	megohms
Output Voltage Swing (R _L = 7.0 kΩ [Figure 8])	V _O	±3.5	±4.0	—	±3.0	±4.0	—	V _{peak}
Input Common-Mode Voltage Swing	V _{ICR}	±2.0	±3.0	—	—	±3.0	—	V _{peak}
Common-Mode Rejection Ratio	CMRR	75	90	—	60	90	—	dB
Input Bias Current ($I_{IB} = \frac{I_1 + I_2}{2}$, T _A = +25°C)	I _{IB}	—	0.8	2.0	—	2.0	4.0	μA
Input Offset Current (I _{IO} = I ₁ - I ₂) (I _{IO} = I ₁ - I ₂ , T _A = T _{low}) (I _{IO} = I ₁ - I ₂ , T _A = T _{high})	I _{IO}	—	30	100	—	30	200	nA
		—	—	200	—	—	—	
		—	—	200	—	—	—	
Input Offset Voltage (T _A = +25°C)	V _{IO}	—	5.0	10	—	5.0	15	mV
Step Response Gain = 1.0, 10% Overshoot R ₁ = 10 kΩ R ₂ = 10 kΩ R ₃ = 5.0 kΩ C _s = 39 pF Gain = 10, 10% Overshoot R ₁ = 10 kΩ R ₂ = 100 kΩ R ₃ = 10 kΩ C _s = 10 pF Gain = 100, No Overshoot R ₁ = 1.0 kΩ R ₂ = 100 kΩ R ₃ = 1.0 kΩ C _s = 1.0 pF Open Loop, No Overshoot R ₁ = 50 Ω R ₂ = ∞ R ₃ = 50 Ω C _s = 0	t _{THL} t _{PLH} , t _{PHL} dV _{out} /dt ①	—	80	—	—	80	—	ns
		—	70	—	—	70	—	ns
		—	5.0	—	—	5.0	—	V/μs
		—	80	—	—	80	—	ns
		—	70	—	—	70	—	ns
		—	15	—	—	15	—	V/μs
		—	80	—	—	80	—	ns
		—	70	—	—	70	—	ns
		—	30	—	—	30	—	V/μs
		—	180	—	—	180	—	ns
		—	70	—	—	70	—	ns
		—	35	—	—	35	—	V/μs
Bandwidth: (Open Loop [Figure 4]) (Closed Loop [Unity Gain]) (Figure 5)	—	—	2.0	—	—	2.0	—	MHz
		—	10	—	—	10	—	
Input Noise Voltage (Open Loop) (5.0 Hz - 5.0 MHz)	V _{n(in)}	—	11	15	—	11	—	μV(rms)
Average Temperature Coefficient of Input Offset Voltage (R _S = 50 Ω, T _A = T _{low} to T _{high})	ΔV _{IO} /ΔT	—	2.0	—	—	2.0	—	μV/°C
DC Power Dissipation (V _O = 0)	P _D	—	120	240	—	120	240	mW
Power Supply Sensitivity (V _O = 0)	S [±]	—	250	450	—	250	—	μV/V

① dV_{out}/dt = Slew Rate② T_{low} = 0°C for MC1420,
-55°C for MC1520T_{high} = +75°C for MC1420
+125°C for MC1520

DIFFERENTIAL ELECTRICAL CHARACTERISTICS

($V_{CC} = +6.0$ Vdc, $V_{EE} = -6.0$ Vdc, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

Characteristic	Symbol	MC1520			MC1420			Unit
		Min	Typ	Max	Min	Typ	Max	
Gain (Open Loop)	A_{vol}	2000 66	3000 70	—	1500 64	3000 70	—	V/V dB
Input Impedance ($f = 20$ Hz)	z_{id}	0.5	2.0	—	—	2.0	—	megohms
Output Impedance ($f = 20$ Hz)	z_{od}	—	100	200	—	100	—	ohms
Common-Mode Output Voltage	$V_{O(CM)}$	-0.5	0	+0.5	—	0	—	Vdc
Output Voltage Swing ($R_L = 7.0$ k Ω)	V_O	± 7.0	± 8.0	—	± 6.0	± 8.0	—	V_{peak}

TYPICAL CHARACTERISTICS

($V_{CC} = +6.0$ Vdc, $V_{EE} = -6.0$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

FIGURE 2 — LARGE SIGNAL SWING
versus FREQUENCY


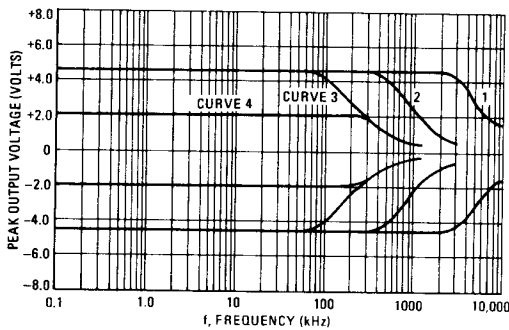


FIGURE 3 — OPEN LOOP VOLTAGE GAIN

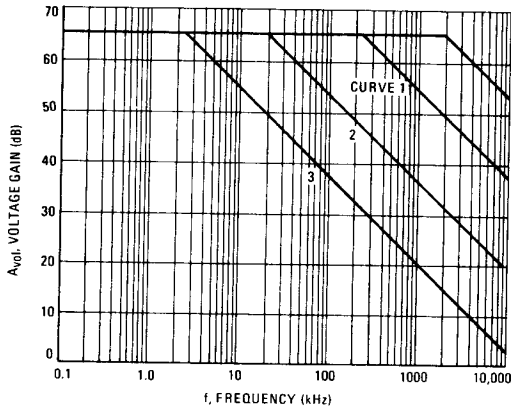

TEST CIRCUIT


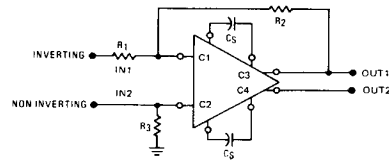





FIGURE NO.	CURVE NO.	MODE	VOLTAGE GAIN	TEST CONDITIONS					NOISE OUTPUT mV (rms)
				R_1 (Ω)	R_2 (Ω)	R_3 (Ω)	C_S (pF)		
2	1	INVERTING	100	1.0 k	100 k	1.0 k	1.0	2.0	0.55
	2	INVERTING	10	10 k	100 k	10 k	10	0.55	
	3	INVERTING	1.0	10 k	10 k	5.0 k	39	0.17	
	4	NON INVERTING	1.0	∞	10 k	10 k	39	0.17	
3	1	NON INVERTING	A_{vol}	0	∞	50	1.0	1.0	2.0
	2	NON INVERTING	A_{vol}	0	∞	50	10	2.0	
	3	NON INVERTING	A_{vol}	0	∞	50	39	5.2	
4	1	NON INVERTING	100	100	10 k	100	1.0	2.0	0.55
	2	NON INVERTING	10	1.0 k	9.1 k	910	10	0.55	
	3	NON INVERTING	1.0	∞	10 k	10 k	39	0.17	

FIGURE 4 — CLOSED LOOP VOLTAGE GAIN
versus FREQUENCY

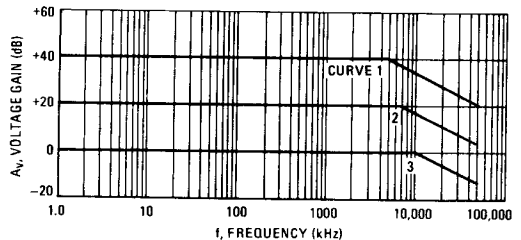

TYPICAL OUTPUT CHARACTERISTICS

($V_{CC} = +6.0$ Vdc, $V_{EE} = -6.0$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

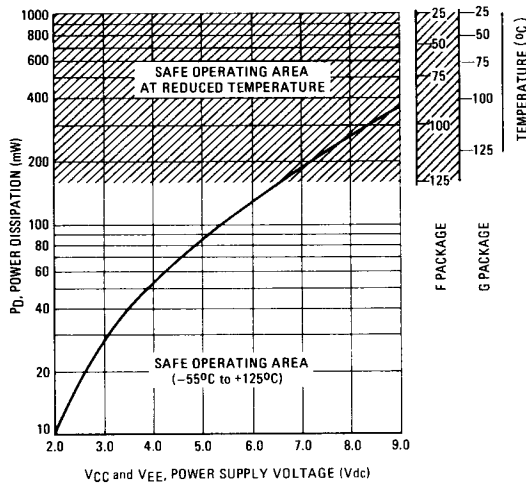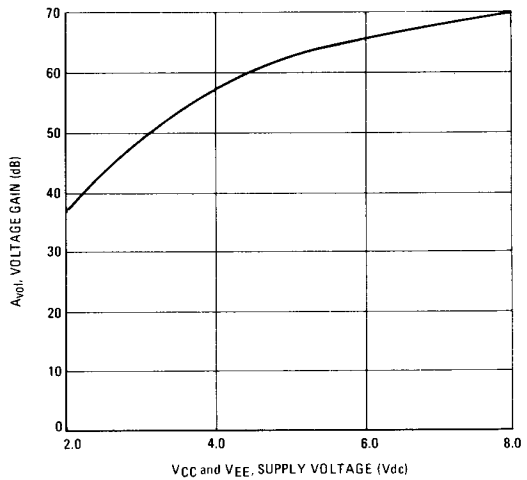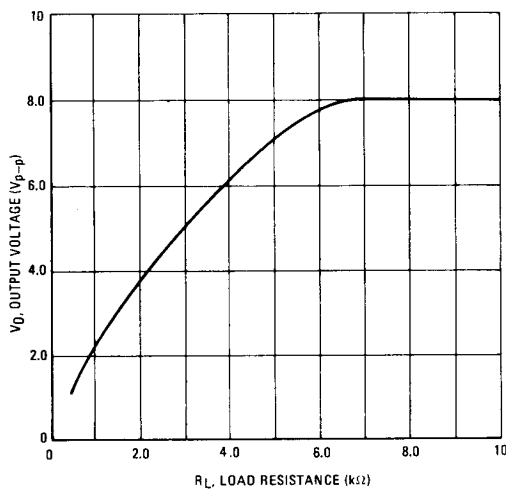FIGURE 5 – POWER DISSIPATION
versus POWER SUPPLY VOLTAGEFIGURE 6 – OPEN LOOP VOLTAGE GAIN
versus SUPPLY VOLTAGEFIGURE 7 – SINGLE ENDED OUTPUT VOLTAGE
versus LOAD RESISTANCEFIGURE 8 – OUTPUT NOISE VOLTAGE
versus SOURCE RESISTANCE