

HF series

Hall effect joysticks

Distinctive features and specifications



- ☐ 1, 2 & 3 axis configurations
- ☐ CANbus J1939 and CANopen options
- ☐ USB 1.1 HID interface option
- ☐ Dual sensors for redundancy
- ☐ Voltage regulator, 24V supply option
- ☐ Connectorized housing

MECHANICAL (FOR X, Y AXIS)

- Break Out Force: 1.3N (0.3lbf)
- Operating Force: 2.8N (0.63lbf)
- Maximum Applied Force: 200N (45.00lbf)
- Mechanical Angle of Movement: 36° (18° from center)
- Expected Life: 5 million
- Material: Glass filled nylon
- Package Size: 5.75" x 4.50" x 3.25"
- Lever Action: Single spring, omnidirectional

ENVIRONMENTAL

- Operating Temperature: -40°C to 85°C (-40°F to 185°F)
- Storage Temperature: -40°C to 85°C (-40°F to 185°F)
- Sealing (IP): Up to IP68*
- EMC Immunity Level (V/M): EN61000-4-3
- EMC Emissions Level: EN61000-6-3:2001
- ESD: EN61000-4-2
- Output linearity: $\pm 200\text{mV}$
- Dual output interlinearity (X/Y): $\pm 400\text{mV}$
- Dual output interlinearity (Z): $\pm 600\text{mV}$

MECHANICAL (FOR Z AXIS)

- Break Out Torque: 0.09N·m (0.80lbf·in)
- Operating Torque: 0.121N·m(1.07lbf·in)
- Maximum Allowable Torque: 2.50N·m(22.13lbf·in)
- Hand Mechanical Angle: 60° (30° from center)
- Handle Action: Spring centering, rotational
- Expected Life: 5 million

ELECTRICAL

- Sensor: Hall effect
- Supply Voltage Operating: 5VDC $\pm 0.01\text{VDC}$
- Reverse Polarity Max: -10VDC
- Overvoltage Max: 20VDC
- Output Voltage: See options
- Output Impedance: 2 Ω

NOTES:

- All values are nominal.
- Exact specifications may be subject to configuration. Contact Technical Support for the performance of your specific configuration.
- * Excludes some handle options.



Note: The company reserves the right to change specifications without notice.

APEM

www.apem.com

HF series

Hall effect joysticks

Overview

HF				
SERIES		Limiters Plate		Output Options
		S Square □ R Round ○ X Slotted — Y Slotted — P Plus + C Cross × W Guided Feel Square Z Guided Feel Round		
	Handle		Mounting	
	10 Ball Tip (2 Axis) 11 Tapered (2 Axis) 22 1 Pushbutton (2 Axis) 27 1 Pushbutton (2 Axis), IP67 Sealed 33 3 Axis 44 1 Pushbutton (3 Axis) 45 2 Pushbuttons (3 Axis) 46 Low Profile (3 Axis) 50 3 Axis, IP67 Sealed 51 3 Axis, 1 Pushbutton, IP67 Sealed 52 3 Axis, 2 Pushbutton, IP67 Sealed 55 3 Axis, 2 Pushbutton, IP67 Sealed		1 Drop-in 4 Rear Mount	
				0 0V to 5V 1 0.5V to 4.5V 2 0.25V to 4.75V 3 1V to 4V 4 0V to 5V - Sensor 1 0V to 5V - Sensor 2 5 0.5V to 4.5V - Sensor 1 0.5V to 4.5V - Sensor 2 6 0.25V to 4.75V - Sensor 1 0.25V to 4.75V - Sensor 2 7 1V to 4V - Sensor 1 1V to 4V - Sensor 2 8 0V to 5V - Sensor 1 5V to 0V - Sensor 2 9 0.5V to 4.5V - Sensor 1 4.5V to 0.5V - Sensor 2 10 0.25V to 4.75V - Sensor 1 4.75V to 0.25V - Sensor 2 11 1V to 4V - Sensor 1 4V to 1V - Sensor 2 0-U USB-Horizontal, Mini B termination 2-U USB-Vertical cable exit 1-J Cursor Emulation 0-V 0V to 5V (Voltage regulator)* B-V ±10V (Voltage regulator)** 2-C CANbus J1939 3-C CANopen

NOTES

- The HF Series joysticks are supplied with a Hirose DF11-12DP-2DS9(24) connector (male receptacle). (Fig 1) Cable not included. Please request at order entry. Cable connector (female socket) is Hirose DF11-12DS-2C. (Fig 2) Connector specifications: 12 position 2mm pitch dual row (2x6) pin header.

Wire Color	Description
Black	Ground
Red	Power
Blue/White	X-Axis (Dual Output)
Blue	X-Axis
Yellow/Black	Y-Axis (Dual Output)
Yellow	Y-Axis
Green/Black	Z-Axis (Dual Output)
Green	Z-Axis
Orange	Button 1
White	Button Common
Violet	Button 2

* Requires operating voltage $6V \geq 35V$

** Requires operating voltage $11V \geq 35V$



Fig 1



Fig 2



Up to IP68 available.



Mounting accessories. Standard hardware includes: gasket, clamping ring, and four #4-40x3/4 Phil Ph MS SS screws.





Note: The company reserves the right to change specifications without notice.

HF series



Hall effect joysticks

Overview



10

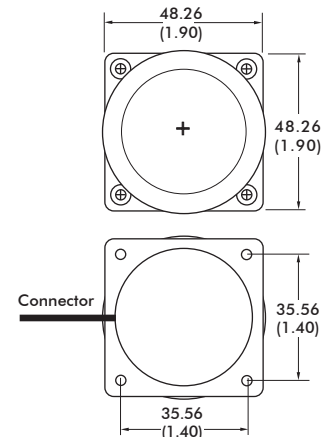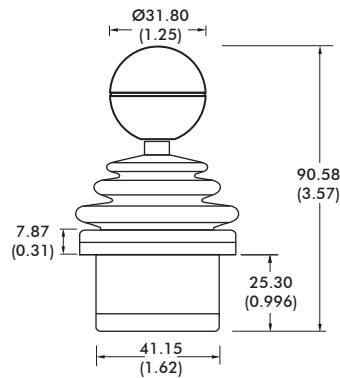



11

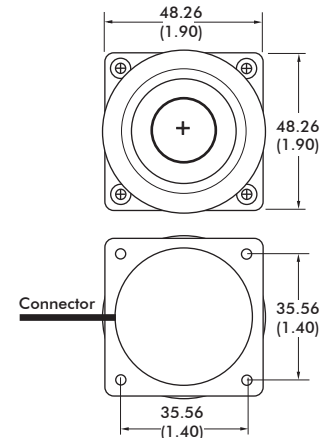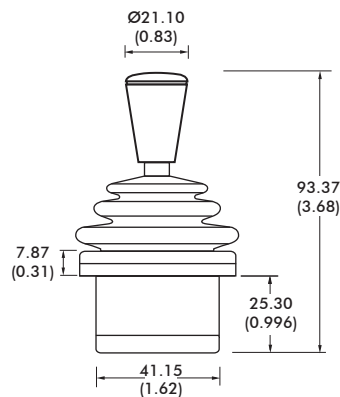

22

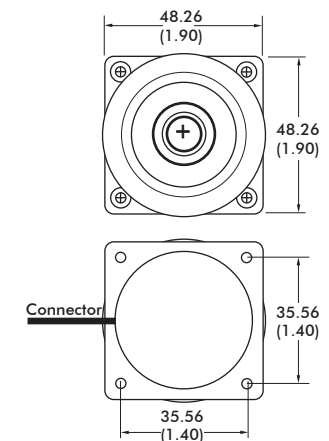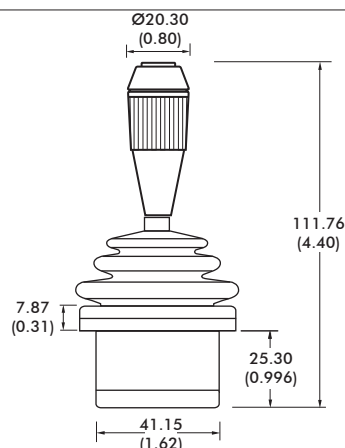

27

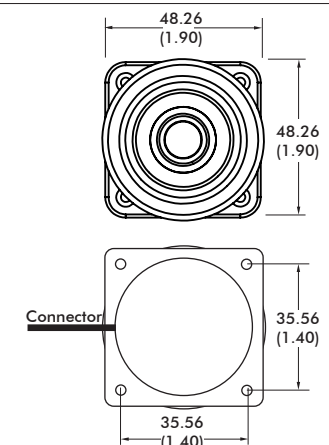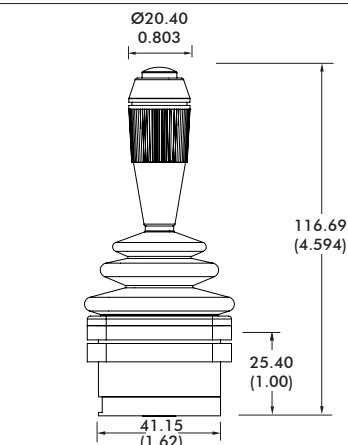

Note: The company reserves the right to change specifications without notice.

APEM



www.apem.com

HF series



Hall effect joysticks

Overview



33

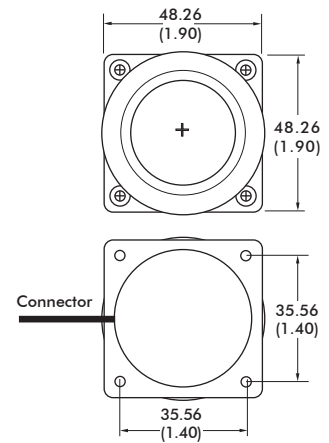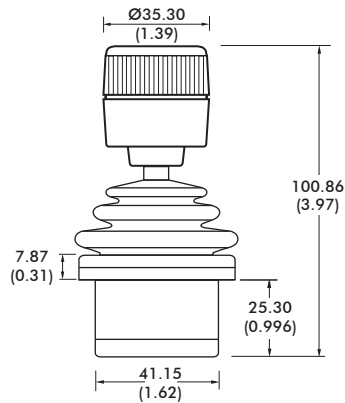



44

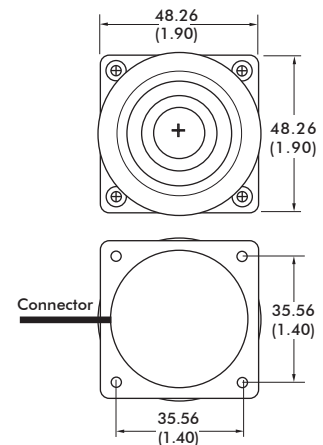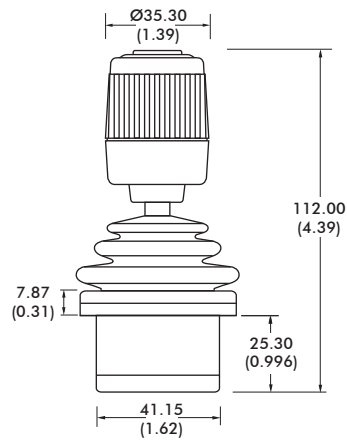

45

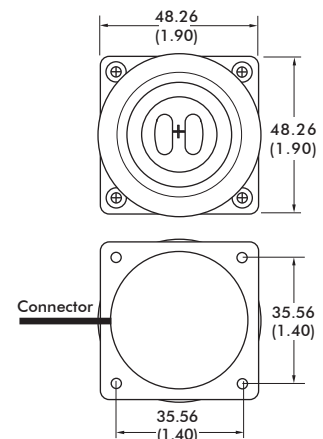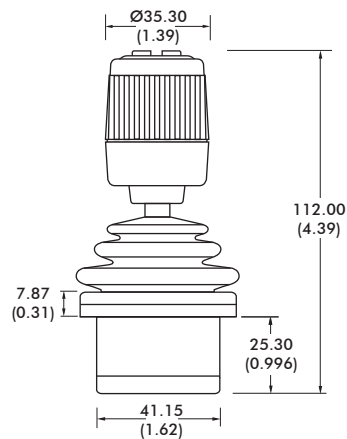

46

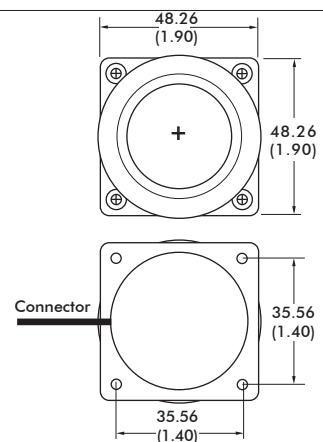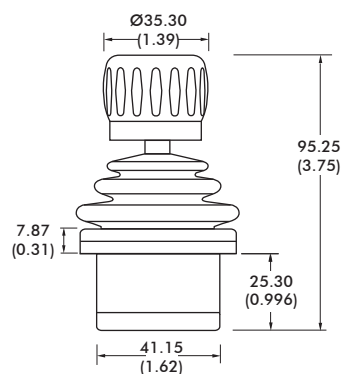


Note: The company reserves the right to change specifications without notice.

HF series

Hall effect joysticks

Overview

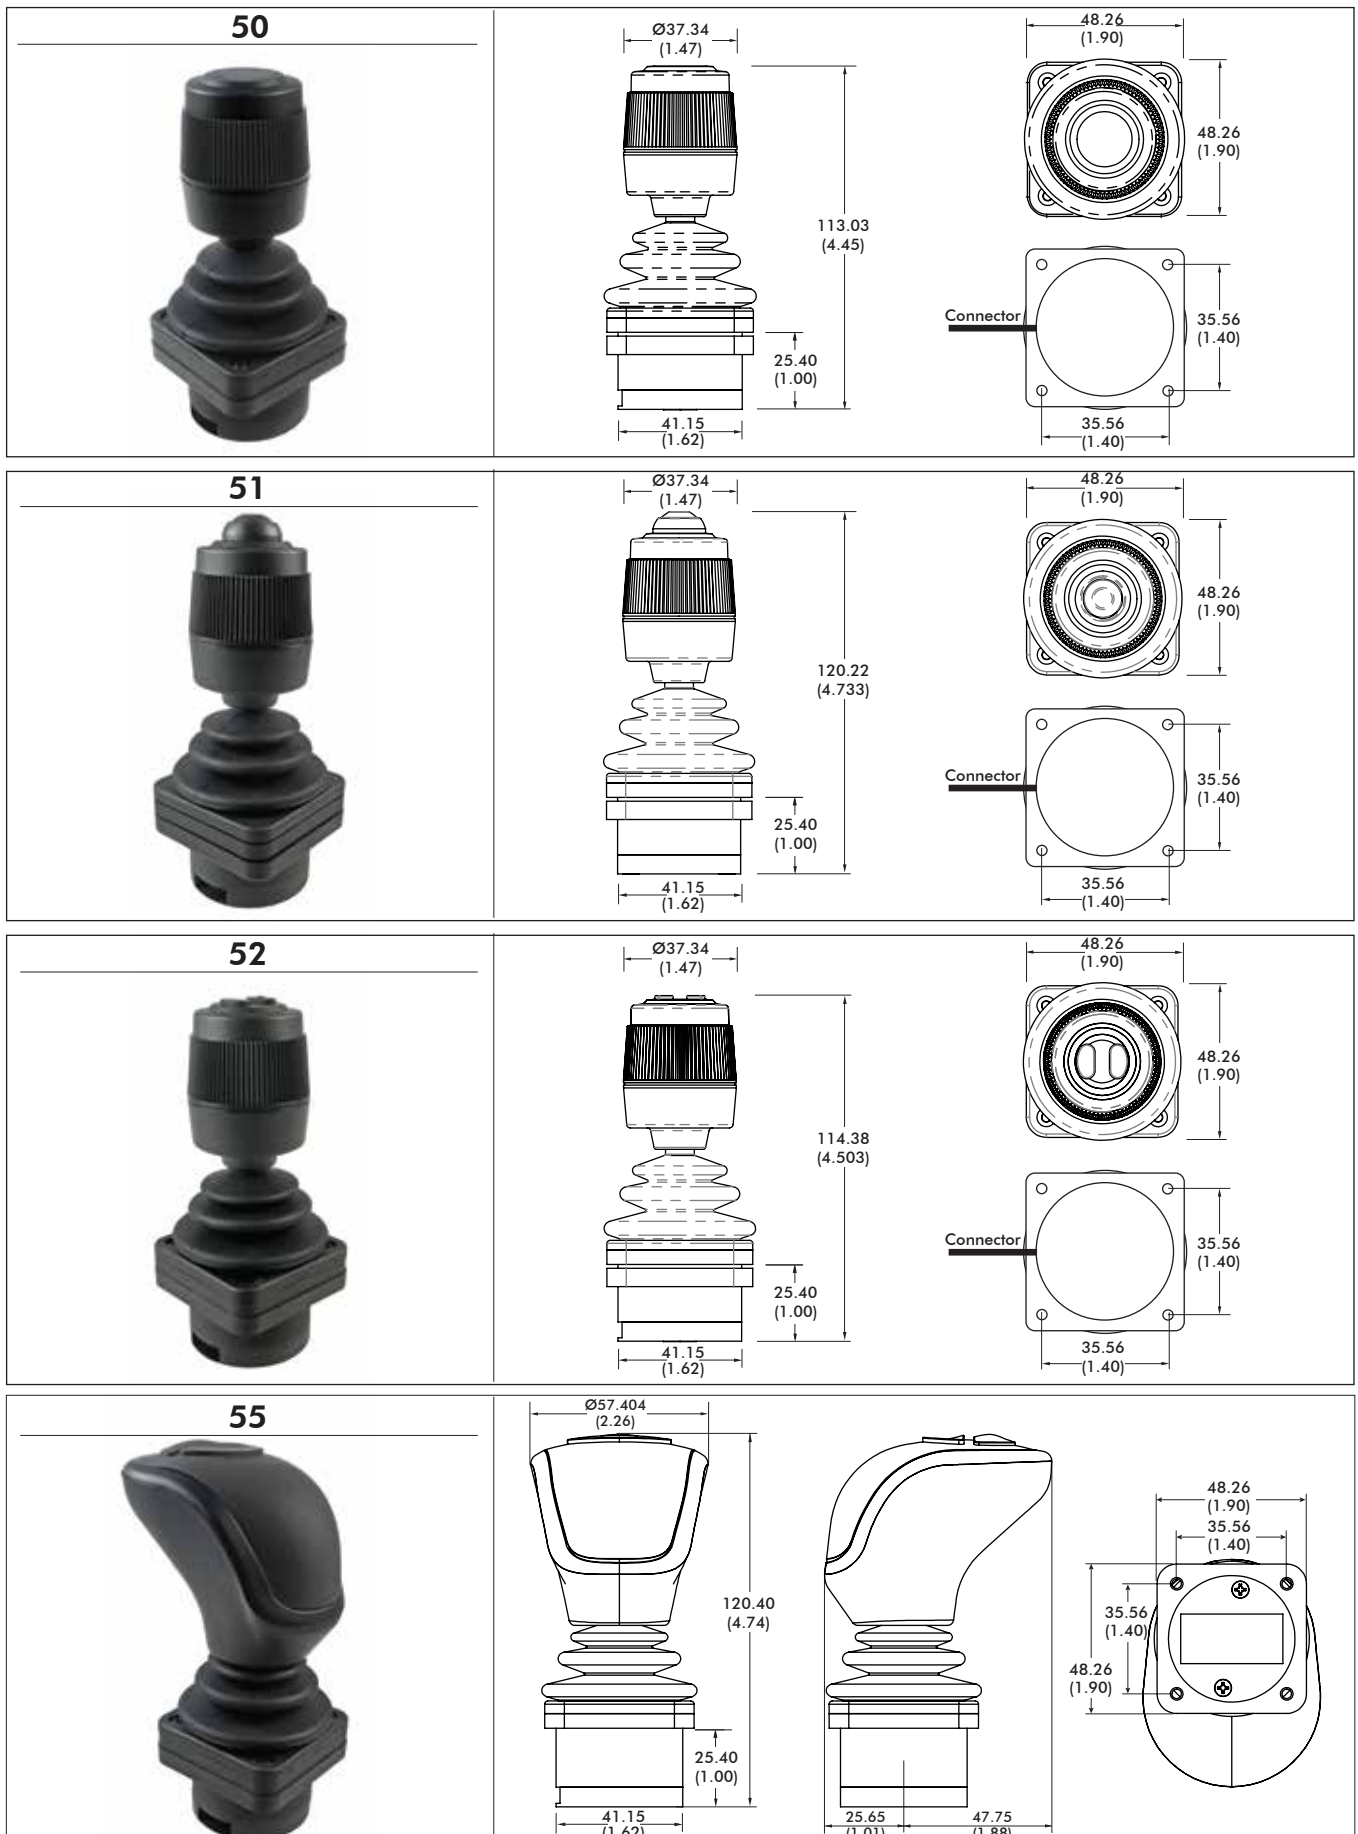

Note: The company reserves the right to change specifications without notice.

APEM



www.apem.com

HF series

Hall effect joysticks


Overview

PANEL CUT-OUT DIMENSIONS

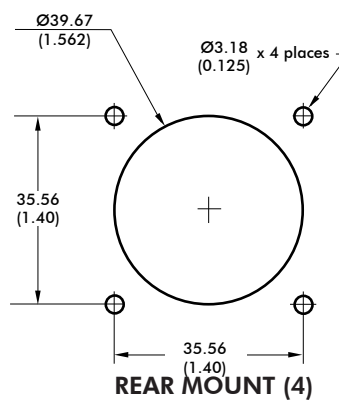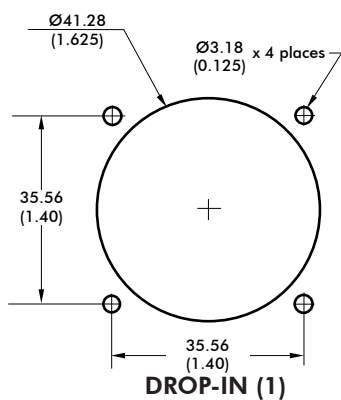


* Not available for Option 11 and 55 Handles

MOUNTING OPTIONS

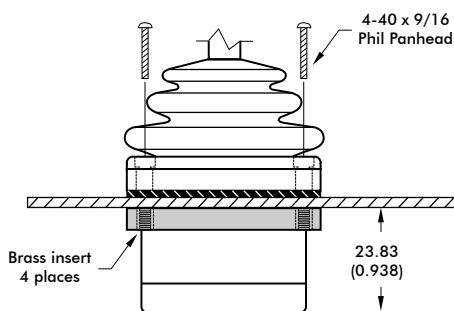


DROP-IN (1)

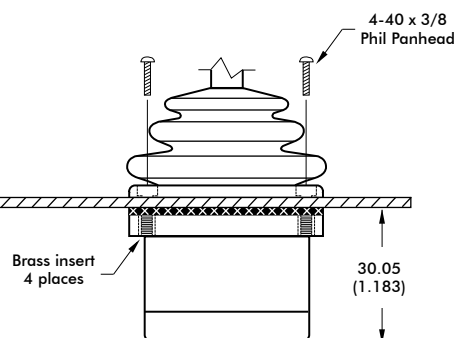


REAR MOUNT (4)

CLAMPING RING

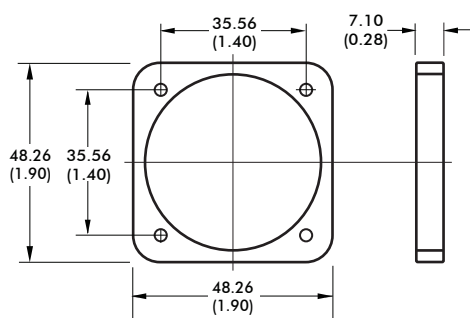


NOTES:

- For DROP-IN mounting, the panel thickness can be 1.17mm to 3.17mm (0.046in to 0.125in).
- For REAR MOUNT the maximum panel thickness is 1.6mm (0.063in).
- A panel thickness of 1/16" (1.6mm/0.063in) was considered for all the below-panel depth values.
- The below-panel depth is extended by 7.11mm (0.28in) with the USB, Cursor Emulation, Voltage Regulator options.

-  - Panel
-  - Gasket
-  - Rear Mount Gasket

NOTES:

1. Dimensions are in mm/(inch).
2. Axis orientation:




Note: The company reserves the right to change specifications without notice.

HF series

Hall effect joysticks

Overview

VOLTAGE OUTPUT OPTIONS

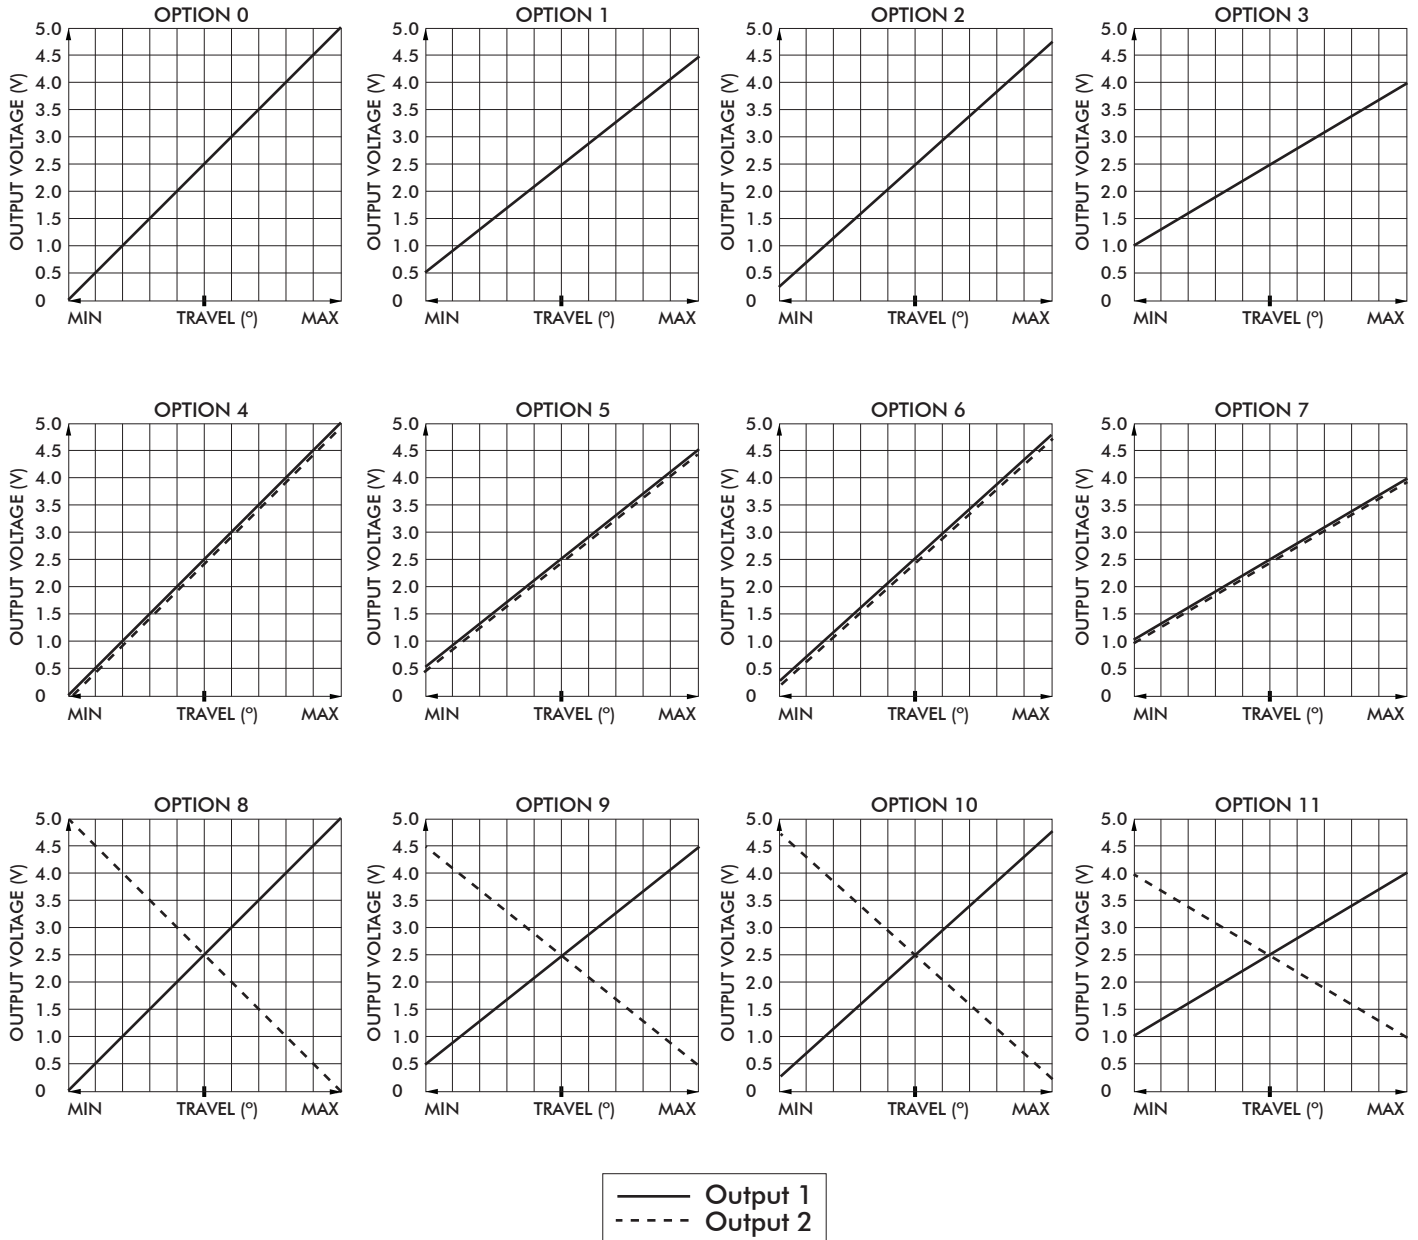

Note: The company reserves the right to change specifications without notice.

HF series

Hall effect joysticks

Overview

USB

USB

Featuring USB 1.1 HID compliant interface, APEM's USB joysticks are recognized as standard HID "game controller" devices. Adhering to the HID specification, APEM's USB joysticks are plug-and-play with most versions of Windows and Linux. Joystick button and axis assignments are dependent upon the controlled application.

FEATURES

- USB 1.1 HID compliant "game controller" device
- Easy to install and operate
- Functions determined by controlled application
- Standard Male Type A Connector

CURSOR EMULATION

The Cursor Emulation option converts multi-axis joystick output into a mouse, trackball, or cursor control device. The joystick's internal microprocessor converts absolute axis position into a cursor velocity, which is translated as a relative trackball or mouse position.

APPLICATIONS

The Cursor Emulation option is ideal for vehicle applications subjected to dirt and high vibration which makes operating a traditional cursor control device difficult. The Cursor Emulation option is widely used in marine and military applications.


FEATURES

- HID compliant "pointing device"
- Plug-and-play with USB option
- Ideal for marine GPS and navigation

TERMINATION OPTIONS

- 0-U USB Male Type A to mini B
- 2-U USB Male Type A to verticle cable termination

I/O COMPLEMENT/ USER SPECIFIED PARAMETERS:

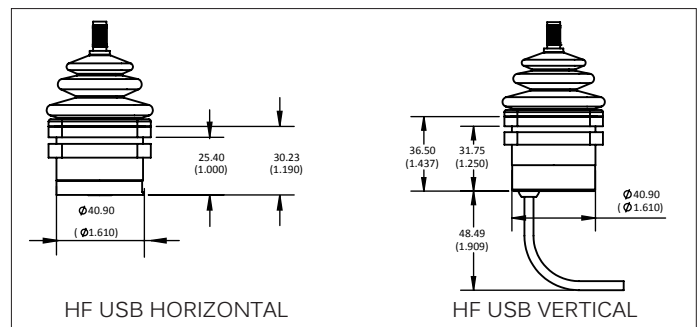

ADDITIONAL OUTPUT OPTIONS

VOLTAGE REGULATOR

The Voltage Regulator option may be used when the operating supply voltage is 11V to 35V..

User Specified Output Voltage:

- 0-5VDC
- ± 10 VDC

ELECTRICAL SPECIFICATIONS

- Supply Voltage: 11V to 35V
- Supply Current: 90mA max

WIRING SPECIFICATION

- Red wire: Supply (+35V max.)
- Black wire: Ground
- Blue wire: X axis output
- Yellow wire: Y axis output
- Green wire: Z axis output
- White wire: Pushbutton common wire
- Orange,violet,gre,y,brown,pink,bl/wt/y/bk,gn/bk,gy/w wire: Pushbutton outputs

Note: The company reserves the right to change specifications without notice.


CANbus

CANbus ELECTRICAL SPECIFICATIONS

- Operating voltage: 6V to 35V
- Current consumption: TBD
(typical: 35mA @ 12V, 18mA @ 24V, 15mA @ 30V)
- Output signal: CANbus
- Reverse connection protected: Yes
- Short-circuit protected against + UB max: Yes
- Short-circuit protected against GND: Yes
- CAN: ISO 11898, CAN specification 2.0A/ 2.0B
- Protocol: CANJ1939, CANJ1939-71, CANopen
- Baud rate: 125kbit/s, 250kbit/s, 500kbit/s, 1Mbit/s
- CAN ID: 11/29 bit/s as requested
- BJM/EJM cycle time: 50ms (standard)/15ms (optional)
- Terminating resistor: Optional
- Operating temperature: -40° to +85°C (-40°F to 185°F)
- Storage temperature: -40° to +85°C (-40°F to 185°F)
- Wiring specifications: 22AWG, PTFE, 22" ±.125"
 - Red: Supply power
 - Black: Ground
 - Green: CAN High data
 - White: CAN Low data
 - Blue: Identifier Select LSB
 - Orange: Identifier Select MSB

MOUNTING

Below panel dimensions for CANbus configurations

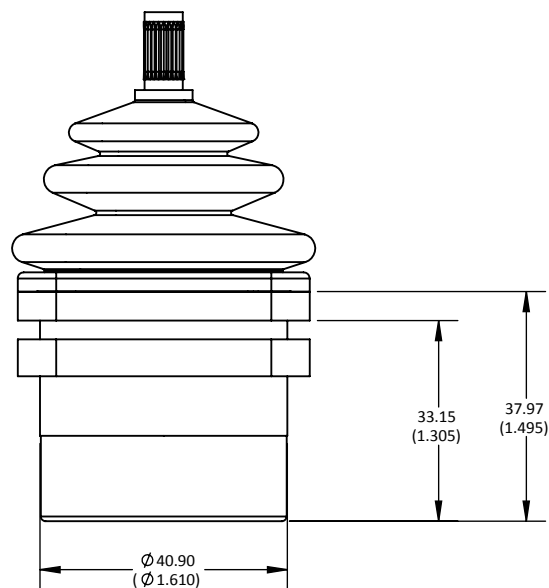

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[HF-33S10](#) [HF-45S10](#) [HF-44S10-U](#) [HF-11S10](#) [HF-27S10](#) [HF10R11](#) [HF44S10](#) [HF45S10U](#) [HF45R10](#) [HF10S11](#)
[HF45S12](#) [HF22Y12](#) [HF10S10](#) [HF10P10](#)