



DESCRIPTION: POWER COMBO SOLDER CUP


FACE VIEW OF RECEPTACLE IS SHOWN




5W1




3W3




3W3K




7W2




11W1




5W5




13W3




17W2



21W1



8W8



21WA4

PART NUMBER KEY

680 XXXX X 0 2 XX 1

SERIES

680

SHELL SIZE

5W1

3W3

3W3K

7W2

11W1

5W5

13W3

17W2

21W1

8W8

21WA4 (SEE BELOW)

GENDER

1 = MALE (PLUG)

2 = FEMALE (RECEPTACLE)

TERMINATION TYPE

0 = SOLDER CUP

SHELL PLATING

2 = TIN/ZINC

POWER CONTACT

20 = 20 AMP

40 = 40 AMP

CONTACT PLATING

1 = GOLD FLASH

68021WA4 PART NUMBERS = 68021WA4P201 = MALE 20 AMP
68021WA4P401 = MALE 40 AMP
68021WA4S201 = FEMALE 20 AMP
68021WA4S401 = FEMALE 40 AMP



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
6-3-02

CHECKED:

DATE:

SCALE:

SHEET

1

OF

1

REV


3

DWG NO.


680 SERIES CONNECTORS

NorComp


DESCRIPTION: SIGNAL/POWER CONTACTS

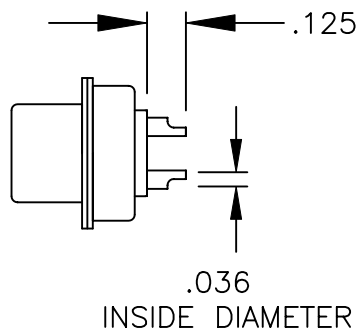

SIGNAL CONTACTS
ACCEPTS UP TO 20 AWG WIRE

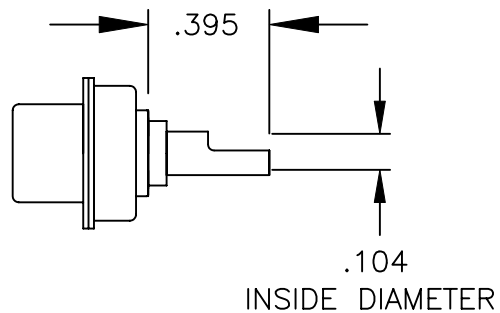

20 AMP POWER CONTACTS
ACCEPTS UP TO 12 AWG WIRE

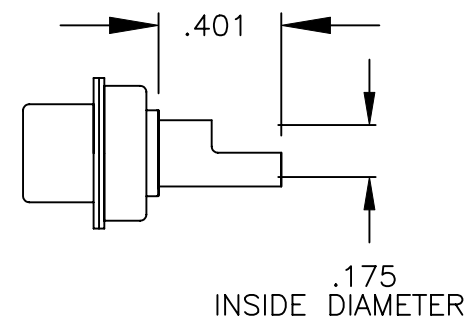

40 AMP POWER CONTACTS
ACCEPTS UP TO 8 AWG WIRE

NOTE: SIGNAL AND POWER CONTACTS COME PRE-LOADED INTO INSULATOR.



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:
PAM JENKINS

DATE:
6-5-02

CHECKED:

DATE:

SCALE:

SHEET 1 OF 1

REV
3

DWG NO.

680 XXXX X 0 2 XX 1