

NOTES:

MATERIAL

1. Insulator Material: Glass-filled thermoplastic PBT, UL94V-0
2. Insulator color : Black
3. Shell : Steel, 100 µ" Tin Over 50µ" min Copper
4. Contact: Brass
5. Housing: Zytel FR-50 UL94V-0, Standard colour black

ELECTRICAL

- 1.Contact Resistance: 30mOhm max. at DC 100mA
- 2.Insulator Resistance: 1000MOhm Min. at DC 500V
- 3.Current Rating: 3 AMP
- 4.Dielectric Withstanding Voltage: AC 500V for 1 minute





① OPERATING TEMPERATURE: -55°C to +105°C

Order Code:

A-DxCR/xx/FZ

Contact style: —
F - Female
S - Male

No. of Contacts
09 / 15 / 25 / 37 / 50

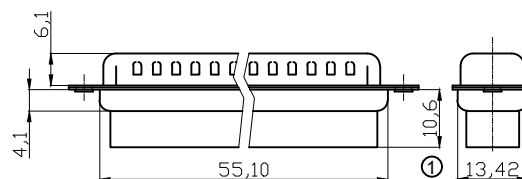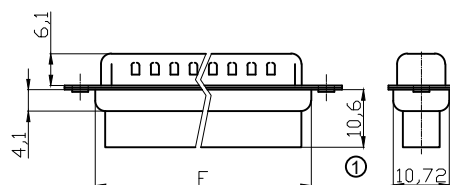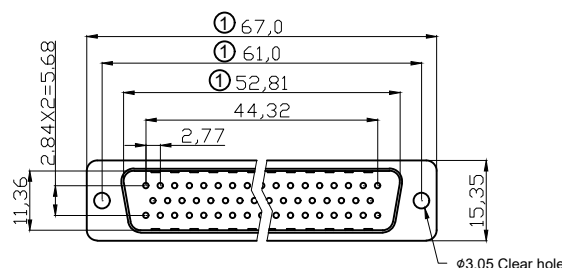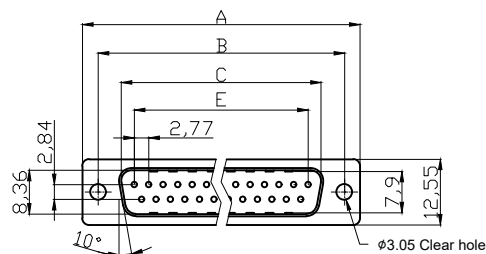

50 Positions

Dimensions

Dimensions Positions	A	B	C	E	F
09	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.05	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30
50	67.0	61.0	52.81	44.32	55.10

RoHS compliant

Unit: mm





File No.: E198287

[illegible]

	1	2	3	4	5	6	7																																																																													
A	Male					NOTES: MATERIAL 1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0 2.Insulator color :Black 3.Shell :Steel, 100 μ" Tin Over 50μ" min Copper 4.Contact: Brass 5.Housing: Zytel FR-50 UL94V-0, Standard colour black ELECTRICAL 1.Contact Resistance: 30mOhm max. at DC 100mA 2.Insulator Resistance: 1000MOhm Min. at DC 500V 3.Current Rating: 3 AMP 4.Dielectric Withstanding Voltage: AC 500V for 1 minute ① OPERATING TEMPERATURE: -55°C to +105°C Order Code: A-DxCR/xx/FZ-UNC Contact style: F - Female S - Male No. of Contacts 09 / 15 / 25 / 37 / 50			A																																																																											
B									B																																																																											
C									C																																																																											
D									D																																																																											
E									E																																																																											
F	50 Positions					<table><tr><th>Positions</th><th>A</th><th>B</th><th>C</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.92</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>25.25</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.96</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>55.42</td><td>49.86</td><td>57.30</td></tr><tr><td>50</td><td>67.0</td><td>61.0</td><td>52.81</td><td>44.32</td><td>55.10</td></tr></table>			Positions	A	B	C	E	F	09	30.81	24.99	16.92	11.08	19.20	15	39.20	33.30	25.25	19.39	27.70	25	53.05	47.04	38.96	33.24	41.10	37	69.40	63.50	55.42	49.86	57.30	50	67.0	61.0	52.81	44.32	55.10	F																																							
Positions	A	B	C	E	F																																																																															
09	30.81	24.99	16.92	11.08	19.20																																																																															
15	39.20	33.30	25.25	19.39	27.70																																																																															
25	53.05	47.04	38.96	33.24	41.10																																																																															
37	69.40	63.50	55.42	49.86	57.30																																																																															
50	67.0	61.0	52.81	44.32	55.10																																																																															
G	RoHS compliant Unit: mm File No.: E198287					<table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th>Date</th><th>Name</th><th>Customer-No.</th></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td></td><td>Approved</td><td>13.11.2019</td><td>Winnie</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td>②</td><td>Add A-DxCR/xx/FZ-UNC page 2&4</td><td>13.11.2019</td><td>Winnie</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Add 50 position for female type Update operate temperature and dim.</td><td>17.05.2019</td><td>Xavier</td><td colspan="3" rowspan="2"> ASSMANN WSW components </td></tr><tr><td>X.°</td><td>±3°</td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±1.0°</td><td>⑩</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td colspan="3" rowspan="2">ASSMANN WSW-No. A-DSCR/xx/FZ-UNC Drawing-No. ASS 4893 CO</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td></tr></table>			Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	15.08.2012	Lucas	X.	±0.38					Approved	13.11.2019	Winnie	X.X	±0.25								X.XX	±0.13	②	Add A-DxCR/xx/FZ-UNC page 2&4	13.11.2019	Winnie				DIM	TOL	①	Add 50 position for female type Update operate temperature and dim.	17.05.2019	Xavier	ASSMANN WSW components			X.°	±3°					X.X°	±1.0°	⑩	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-DSCR/xx/FZ-UNC Drawing-No. ASS 4893 CO			Angle	TOL	Id.	Modification	Date	Name	G
Scale	Free					Date	Name	Customer-No.																																																																												
TOLERANCE						Drawn	15.08.2012	Lucas																																																																												
X.	±0.38					Approved	13.11.2019	Winnie																																																																												
X.X	±0.25																																																																																			
X.XX	±0.13	②	Add A-DxCR/xx/FZ-UNC page 2&4	13.11.2019	Winnie																																																																															
DIM	TOL	①	Add 50 position for female type Update operate temperature and dim.	17.05.2019	Xavier	ASSMANN WSW components																																																																														
X.°	±3°																																																																																			
X.X°	±1.0°	⑩	Drawn	15.08.2012	Lucas	ASSMANN WSW-No. A-DSCR/xx/FZ-UNC Drawing-No. ASS 4893 CO																																																																														
Angle	TOL	Id.	Modification	Date	Name																																																																															
H						Replace ASS 4893 CO rev02 Sheet 2/4			H																																																																											
	1	2	3	4	5	6	7																																																																													

	1	2	3	4	5	6	7																																																																																						
A	Female					NOTES: MATERIAL 1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0 2.Insulator color :Black 3.Shell :Steel, 100 μ" Tin Over 50μ" min Copper 4.Contact: Brass 5.Housing: Zytel FR-50 UL94V-0, Standard colour black ELECTRICAL 1.Contact Resistance: 30mOhm max. at DC 100mA 2.Insulator Resistance: 1000MOhm Min. at DC 500V 3.Current Rating: 3 AMP 4.Dielectric Withstanding Voltage: AC 500V for 1 minute ① OPERATING TEMPERATURE: -55°C to +105°C Order Code: A-DxCR/xx/FZ-UNC Contact style: F - Female S - Male No. of Contacts 09 / 15 / 25 / 37 / 50			A																																																																																				
B									B																																																																																				
C									C																																																																																				
D									D																																																																																				
E									E																																																																																				
F	① 50 Positions					Dimensions <table><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.33</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>24.70</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.40</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>54.80</td><td>49.86</td><td>57.30</td></tr><tr><td>50</td><td>67.0</td><td>61.0</td><td>52.2</td><td>44.32</td><td>55.10</td></tr></table>			Positions	A	B	D	E	F	09	30.81	24.99	16.33	11.08	19.20	15	39.20	33.30	24.70	19.39	27.70	25	53.05	47.04	38.40	33.24	41.10	37	69.40	63.50	54.80	49.86	57.30	50	67.0	61.0	52.2	44.32	55.10	F																																																
Positions	A	B	D	E	F																																																																																								
09	30.81	24.99	16.33	11.08	19.20																																																																																								
15	39.20	33.30	24.70	19.39	27.70																																																																																								
25	53.05	47.04	38.40	33.24	41.10																																																																																								
37	69.40	63.50	54.80	49.86	57.30																																																																																								
50	67.0	61.0	52.2	44.32	55.10																																																																																								
G	RoHS compliant Unit: mm File No.: E198287		<table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Customer-No.</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td></tr><tr><td>X.</td><td>±0.38</td><td></td><td></td><td></td><td></td><td>Approved</td><td>13.11.2019</td><td>Winnie</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.13</td><td>②</td><td>Add A-DxCR/xx/FZ-UNC page 2&4</td><td>13.11.2019</td><td>Winnie</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>①</td><td>Add 50 position for female type Update operate temperature and dim.</td><td>17.05.2019</td><td>Xavier</td><td colspan="3" rowspan="2"> ASSMANN WSW components </td></tr><tr><td>X.°</td><td>±3°</td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±1.0°</td><td>⑩</td><td>Drawn</td><td>15.08.2012</td><td>Lucas</td><td colspan="2">ASSMANN WSW-No.</td><td>A-DFCR/xx/FZ</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">Drawing-No.</td><td>ASS 4893 CO rev02</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td colspan="2">Replace</td><td>Sheet 3/4</td></tr></table>			Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	15.08.2012	Lucas	X.	±0.38					Approved	13.11.2019	Winnie	X.X	±0.25								X.XX	±0.13	②	Add A-DxCR/xx/FZ-UNC page 2&4	13.11.2019	Winnie				DIM	TOL	①	Add 50 position for female type Update operate temperature and dim.	17.05.2019	Xavier	ASSMANN WSW components			X.°	±3°					X.X°	±1.0°	⑩	Drawn	15.08.2012	Lucas	ASSMANN WSW-No.		A-DFCR/xx/FZ	Angle	TOL	Id.	Modification	Date	Name	Drawing-No.		ASS 4893 CO rev02							Replace		Sheet 3/4	G
Scale	Free					Date	Name	Customer-No.																																																																																					
TOLERANCE						Drawn	15.08.2012	Lucas																																																																																					
X.	±0.38					Approved	13.11.2019	Winnie																																																																																					
X.X	±0.25																																																																																												
X.XX	±0.13	②	Add A-DxCR/xx/FZ-UNC page 2&4	13.11.2019	Winnie																																																																																								
DIM	TOL	①	Add 50 position for female type Update operate temperature and dim.	17.05.2019	Xavier	ASSMANN WSW components																																																																																							
X.°	±3°																																																																																												
X.X°	±1.0°	⑩	Drawn	15.08.2012	Lucas	ASSMANN WSW-No.		A-DFCR/xx/FZ																																																																																					
Angle	TOL	Id.	Modification	Date	Name	Drawing-No.		ASS 4893 CO rev02																																																																																					
						Replace		Sheet 3/4																																																																																					
H									H																																																																																				
	1	2	3	4	5	6	7																																																																																						

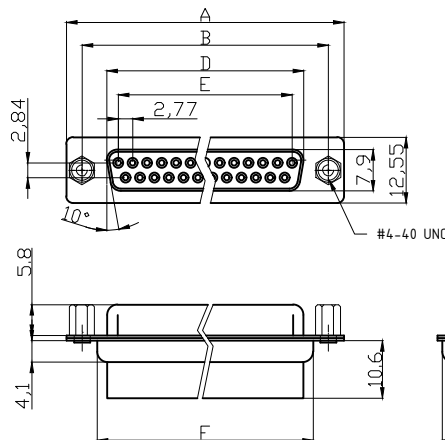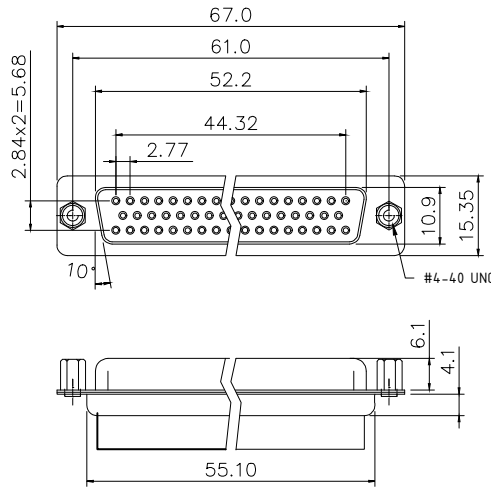	1	2	3	4	5	6	7																																						
A	Female					NOTES:			A																																				
B						MATERIAL			B																																				
C						1.Insulator Material:Glass-filled thermoplastic PBT,UL94V-0			C																																				
D						2.Insulator color :Black			D																																				
E						3.Shell :Steel, 100 μ" Tin Over 50μ" min Copper			E																																				
F						4.Contact: Brass			F																																				
G						5.Housing: Zytel FR-50 UL94V-0, Standard colour black			G																																				
H						ELECTRICAL			H																																				
						1.Contact Resistance: 30mOhm max. at DC 100mA																																							
						2.Insulator Resistance: 1000MOhm Min. at DC 500V																																							
						3.Current Rating: 3 AMP																																							
						4.Dielectric Withstanding Voltage: AC 500V for 1 minute																																							
						① OPERATING TEMPERATURE: -55°C to +105°C																																							
						Order Code:																																							
						A-DxCR/xx/FZ-UNC																																							
						Contact style: F - Female S - Male																																							
						No. of Contacts 09 / 15 / 25 / 37 / 50																																							
																																													
						50 Positions																																							
						Dimensions																																							
						<table><tr><th>Positions</th><th>A</th><th>B</th><th>D</th><th>E</th><th>F</th></tr><tr><td>09</td><td>30.81</td><td>24.99</td><td>16.33</td><td>11.08</td><td>19.20</td></tr><tr><td>15</td><td>39.20</td><td>33.30</td><td>24.70</td><td>19.39</td><td>27.70</td></tr><tr><td>25</td><td>53.05</td><td>47.04</td><td>38.40</td><td>33.24</td><td>41.10</td></tr><tr><td>37</td><td>69.40</td><td>63.50</td><td>54.80</td><td>49.86</td><td>57.30</td></tr><tr><td>50</td><td>67.0</td><td>61.0</td><td>52.2</td><td>44.32</td><td>55.10</td></tr></table>			Positions	A	B	D	E	F	09	30.81	24.99	16.33	11.08	19.20	15	39.20	33.30	24.70	19.39	27.70	25	53.05	47.04	38.40	33.24	41.10	37	69.40	63.50	54.80	49.86	57.30	50	67.0	61.0	52.2	44.32	55.10	
Positions	A	B	D	E	F																																								
09	30.81	24.99	16.33	11.08	19.20																																								
15	39.20	33.30	24.70	19.39	27.70																																								
25	53.05	47.04	38.40	33.24	41.10																																								
37	69.40	63.50	54.80	49.86	57.30																																								
50	67.0	61.0	52.2	44.32	55.10																																								
	RoHS compliant					Scale Free																																							
	Unit: mm					TOLERANCE																																							
	 File No.: E198287					X. ±0.38																																							
						X.X ±0.25																																							
						X.XX ±0.13																																							
						② Add A-DxCR/xx/FZ-UNC page 2&4																																							
						DIM TOL																																							
						X.° ±3°																																							
						X.X° ±1.0°																																							
						⑩ Drawn																																							
						Angle TOL																																							
						Id. Modification																																							
						Date																																							
						Name																																							
						ASSMANN WSW components																																							
						Customer-No.																																							
						ASSMANN WSW-No.																																							
						A-DFCR/xx/FZ-UNC																																							
						Drawing-No.																																							
						ASS 4893 CO																																							
						rev02																																							
						Replace																																							
						Sheet 4/4																																							
	1	2	3	4	5	6	7																																						