V-Series

CONTURA II, III SWITCHES

The V-Series Contura II & III snap-in rocker switches offer countless unique options including choices for ratings, circuits, colors, illuminations and symbols. These single or double pole switches feature removable actuators in a choice of actuator styles and colors, and can be illuminated with either square or bar shaped lenses. Actuators may be purchased and stocked separately. An optional plug-in terminal connector enables pre-wiring of wire harnesses.

The Contura switches with sealed option, are certified to IP66/68, signifying complete protection against dust and prolonged spray and submersion under pressure, and are recognized to UL1500 - Ignition Protection for Marine Products. These switches are vibration, shock, thermoshock, moisture and salt spray resistant. Temperature ratings range from -40°C to +85°C.

Resources:

Download 3D CAD Files

IGS > STP >

Watch Product Video

Product Highlights:

- Countless options for ratings, circuits, colors, illuminations and legends
- Certified to IP66/68 for front panel components
- Vibration, shock, thermoshock, moisture and salt spray resistant
- Temperature range from -40°C to +85°C.

Typical Applications:

- On/Off Highway Equipment
- Marine
- Military Armored Vehicles
- Mining Machinery and Equipment
- Any application requiring environmental protection

Carling Technologies®
Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Email: sales@carlingtech.com
Application Support: team2@carlingtech.com
Phone: 860.793.9281 **Fax:** 860.793.9231

www.carlingtech.com

V-Series Switch
DESIGN FEATURES

INTERCHANGEABLE ACTUATORS
Panel redesign is a snap with our wide range of rocker styles. Achieve maximum design variety with minimum inventory. Simply swap rockers to create an entirely new look for your panel.

DUAL SEAL PROTECTION
Seals out water, dust, debris, and enables switch certification to IP66/68 for front panel components.

CLEAN CONNECTIONS
Options for both eight and ten terminal base styles with AMP & Packard compatible connectors affords myriad circuit options while providing ease of assembly.

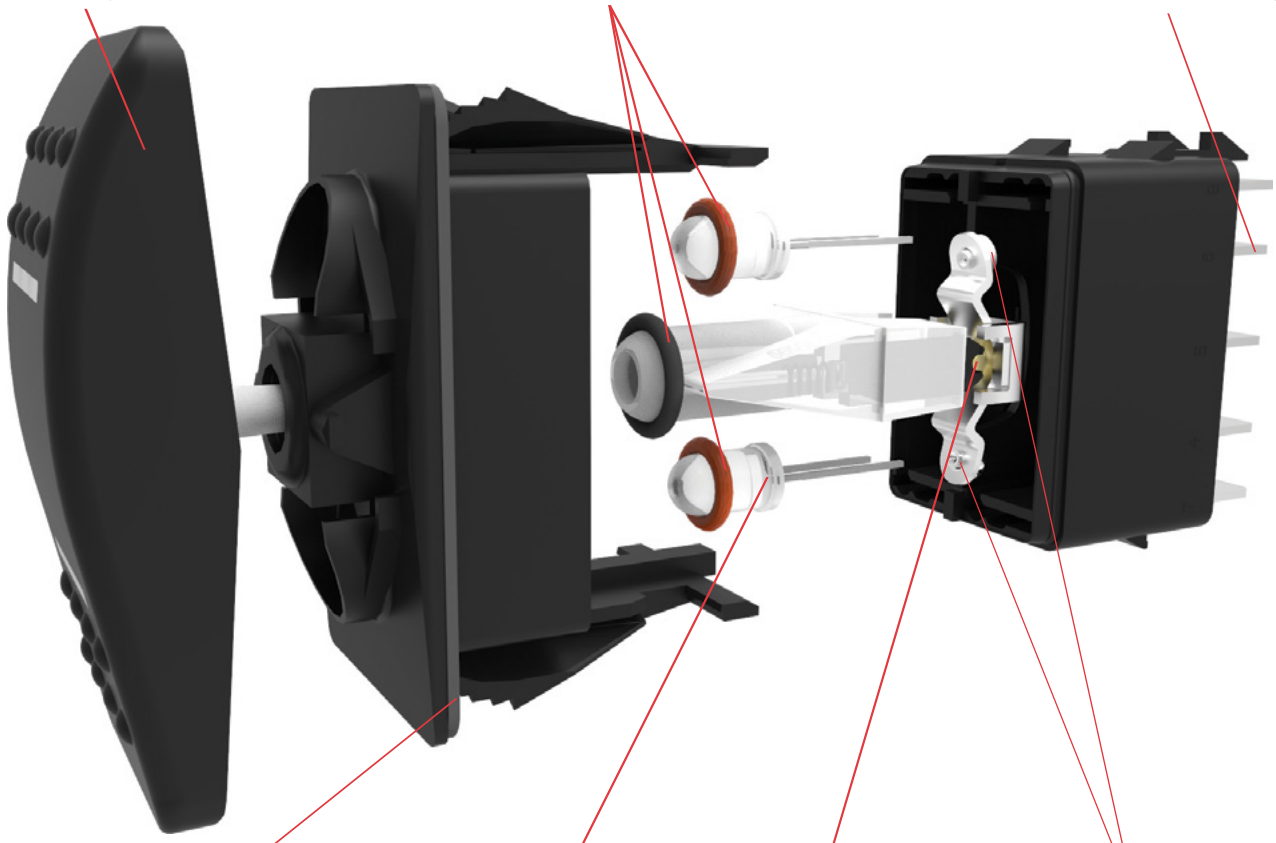

OPTIONAL PANEL SEAL
Prevents water/dust ingress behind panel.

MULTIPLE LIGHTING OPTIONS
In addition to Incandescent lamps, our LED illumination is offered in a wide array of light intensities, colors, as well as dual level, tri-color, and flashing options.

BRASS ROLLER PIN
Robust mechanism eliminates the need for lubricants. Enables switch to withstand -40°C to +85°C temperatures.

SILVER PLATED BUTT CONTACT MECHANISM
Providing 50k to 100k electrical cycles and a variety of different electrical ratings.

*Manufacturer reserves the right to change product specification without prior notice.

Contura II & III

The Contura II & III actuators are constructed of thermoplastic polycarbonate and are offered with a hard nylon overlay or a "soft-touch" elastomer overlay. These models incorporate aesthetic designs on the top and bottom of the rocker featuring two rows of raised "bumps" on the Contura II and three "indented" lines on the Contura III.

Contura X

The raised bracket/bezel on the Contura X helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This curved rocker style is available with a variety of lenses and legends.

Contura IV

The Contura IV's "Shape to create a Shape" actuator works with the curves, contours & advanced styling of the latest panel designs, flowing with these advanced curves & radii. This actuator style fits on the Contura flush bracket/bezel.

Contura XI

The raised bracket/bezel on the Contura XI helps prevent inadvertent actuation of the rocker, as well as preventing debris from being trapped under the actuator. This convex style rocker is available with a wide variety of lenses and legends.

Contura V

The symmetrically curved Contura V actuator provides the perfect complement to the Contura IV's "Shape to create a Shape" design concept. With its flush style mounting bracket, Contura V can be mounted in between two Contura IV's, by itself, or in groups.

Contura XII

The Contura XII version features a paddle style actuator with the raised bracket/bezel of Contura X and XI. The contoured handle design provides intuitive recognition and ease of operation and is available with all Contura X and XI lens and legend offerings.

Contura VI (WAVE)

The Contura VI WAVE sealed rocker switches, when used in a row, create an uniquely appealing "wave" design on your panel. A variety of colors and finishes are available for both rocker and wave insert. Contura VI features bar and oval lenses.

Contura XIV

The Contura XIV represents a sleek new crossover rocker design which should appeal to Trucks, Buses and Heavy Vehicles as well as the Marine Industry. Intuitive feel is provided by recessed ridges along with a Center Groove which effectively defines the boundary between top and bottom switch functions.

Contura VII

Contura VII featuring gently curved corners and edges assuring compatibility with most any panel design. Intuitive feel is maximized by the use of 2 embossed circular pads located at opposite ends of the rocker. Any combination of Bar or Oval style lenses can be located in the pads providing a truly unique look, exclusive to Contura VII.

Illuminated Indicators & Accessories

Alert operator of systems functions or malfunctions, are offered with removable/replaceable lamps in Contura II, II, V or X styles. Accessories include connectors, mounting panels, hole plugs, panel seals, and actuator removal tools. Refer to accessories page for full details

Electrical

Contact Rating	.4VA @ 24VDC (MAX) resistive 15 amps, 125VAC 10 amps, 250VAC 1/2 HP 125-250VAC 20 amps, 4-14VDC 15 amps, 15-28VDC 10A, 14VT 6A, 125VAC L
Dielectric Strength	1500 Volts RMS
Insulation Resistance	50 Megohms
Initial Contact Resistance	10 milliohms max. @ 4VDC
Life	50,000 - 100,000 cycles circuit dependent
Contacts	Silver alloy, silver tin-oxide, fine silver
Terminals	Brass or copper/silver plate 1/4" (6.3mm) Quick Connect terminations standard. Solder lug, Wire Lead

Mechanical

Endurance	150,000 cycles minimum circuit dependent

Physical

Lighted	Incandescent - rated 10,000 hours Neon - rated 25,000 hours LED - rated 100,000 hours 1/2 life (LED is internally ballasted for voltages to 24VDC)
Seals	Internal Optional external gasket panel seal
Base	Polyester blend rated to 125°C with a UL flammability rating of 94V0.
Contura II,III,IV,V, VI, VII Actuator	**Hard Surface:** Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay. **Soft Surface:** Basic actuator structure molded of thermoplastic polycarbonate with an elastomer overlay.
Contura X,XI,XII Actuator,VP	Nylon 66 Reinforced rated to 105°C
Lens	Polycarbonate rated at 100°C
Contura XIV	Polycarbonate lens/sub-rocker with ABS shell

Actuator Travel (Angular Displacement)

2 position	18°
3 positions	9° from center

Mounting Specifications

Panel Thickness Range

Gaskets	**Acceptable Panel Thickness**
0	.030 to .250 (.76 to 6.35mm)
1	.030 to .109 & .147 to .157 (.76 to 2.77mm & 3.73 to 3.98mm)

Recommended: No gasket with panel thickness of .032, .062, .093, .125,.187 or .250



SWITCH MOUNTING HOLE

Agency Certifications

Environmental

Sealing	Sealed version: IP66/68, this rating applies to front panel components of the actual switch only, and signifies complete protection against dust as well as powerful jets of water.
Corrosion	Mixed Flowing Gas (MFG) Class III 3 year accelerated exposure per ASTM B-827, B-845 Silver and gold contacts
Operating Temp.	-40°C to +85°C
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Vibration 2	Resonance search 24-50 Hz 0.40 DA 50-2000 Hz ±10 G's peak Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025 No loss of circuit during test; <10μ seconds chatter.
Shock	Per Mil-Std 202F, Method 213B, Test Condition K @ 30G's. Tested with VCH connector. Test criteria - No loss of circuit during test, pre and post test contact resistance.
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 96 Hrs. Sealed version only.
Dust	Mil STD 810, Method 510.2 Air Velocity 300 Ft/Min Duration 16Hr
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Cond. A, -55°C to +85°C. Test criteria - pre and post test contact resistance
Moisture Resistance	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance
Ignition Protection	All Contura switches with sealed construction meet the requirements of UL1500/ISO8846 for ignition protection, in addition to conformance with EC directive 94/25/EC for marine products.

V	1	D	A	B	T	0	B	-	A	R	B	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Color	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	*10 terminal*
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
2	**B**	(ON)	NONE	OFF
3	**C**	ON	NONE	(OFF)
4	**D**	ON	NONE	ON
5	**F**	ON	NONE	(ON)
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING [3]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5 ILLUMINATION
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
A	**1**	1	INDEPENDENT	8 (+) 7 (–)
B	**2**	1	DOWN	3 (+) 7 (–)
C	**3**	2	UP	3 (+) 7 (–)
D	**4**	1	DOWN	3 (+) 7 (–)
		2	DOWN	1 (+) 7 (–)
E	**5**	1	UP	1 (+) 7 (–)
		2	UP	3 (+) 7 (–)
F	**6**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 6 (–)
G	**7**	1	INDEPENDENT	8 (+) 7 (–)
		2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
U	**Y**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	10 (+) 9 (–)
SINGLE POLE SWITCHES ONLY				
J	**8**	1	DOWN	3 (+) 8 (–)
		2	INDEPENDENT	6 (+) 7 (–)
K	**W**	1	INDEPENDENT	8 (+) 7 (–)
		2	INDEPENDENT	6 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
L	**9**	1	DOWN	3 (+) 6 (–)
M	**R**	1	UP	3 (+) 6 (–)
N	**T**	1	DOWN	3 (+) 6 (–)
		2	DOWN	1 (+) 4 (–)
P	**V**	1	UP	1 (+) 4 (–)
		2	UP	3 (+) 6 (–)

6,7 LAMP (SAME CODING FOR BOTH SELECTIONS)
Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR [1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 ACTUATOR
0 No Actuator
A, B Contura II
C, D Contura III



Actuator orientation above terminals: 3,6 1,4

10 LENS
0 - No Actuator **Z** - No Lens

Clear	White	Amber	Green	Red	Blue
1	**6**	**8**	**G**	**M**	**T**
2	**7**	**C**	**H**	**N**	**U**
3	**8**	**D**	**J**	**P**	**V**
4	**9**	**E**	**K**	**R**	**W**
5	**A**	**F**	**L**	**S**	**Y**



Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR COLOR [1] AND TEXTURE
0 - No Actuator

	Black	Gray	Red	White
Soft Surface	**B**	**G**	**R**	**W**
Hard Surface	**C**	**H**	**S**	**Y**

12 ACTUATOR LENS OR BODY LEGENDS [2]
11 ON OFF **12** OFF ON **13** I O **14** O I

15 O O F N F **16** O O N F F **17** O I **18** I O

For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 11-18 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4

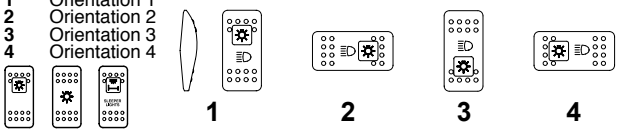

14 ACTUATOR LENS LEGEND
00 No legend this location / no actuator
(used with codes 11-18 in selection 12) Selection 14 required when switch requires two legends. If the two legends consist of one lens and one body legend, lens legend must be specified in selection 12; body legend specified in selection 14.
For legend options & codes, visit us at www.carlingtech.com.

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 Body legends not available on Soft surface actuators; White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Additional ratings available. See V-Series Switch Accessories page.
4 Contura II available with two square lenses. Consult factory for details.

V	1	D	A	S	W	0	B	-	A	Z	E	00	-	0
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lock	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Function	12 Legend		13 Legend Orientation

1 SERIES
V

2 CIRCUIT
Terminal Connections as viewed from bottom of switch:

8 terminal	*10 terminal*
8 - - 7	8 - - 7
1 - - 4	1 - - 4
2 - - 5	2 - - 5
3 - - 6	3 - - 6
	10 - - 9

( ) - momentary
SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:		1	2	3
SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
1	**A**	ON	NONE	OFF
4	**D**	ON	NONE	ON
6	**J**	ON	OFF	ON
7	**K**	ON	OFF	(ON)
8	**L**	(ON)	OFF	(ON)
9	**N**	OFF	NONE	ON
SPECIAL CIRCUITS				
H*		2 & 3	2 & 3, 5 & 4	5 & 4
G*		2 & 3, 5 & 6	2 & 3	OFF
S*		2 & 3, 5 & 6	2 & 3	1 & 2
M*		(2 & 3, 5 & 6)	2 & 3	OFF
R*		(2 & 3, 5 & 6)	2 & 3	2 & 1
E*		5 & 6	5 & 3	5 & 1

*Jumper between terminals 2 & 5 for circuits H,G,M,R & S are specified in selection 4. External jumper between terminals 2 & 4 for circuit E are provided by customer. Circuit E may be used for SP OFF-ON-ON circuit.

3 RATING [4]
1 .4VA @ 28VDC Resistive
B 15A 24V
C 20A 18V
D 20A 12V
E 20A 14V, 10A 14VT (circuit 1, 4 , A & D only)
F 10A 14V, 6A 14VT (circuit G only)
M .4VA/20A 12V
N .4VA/15A 24V

4 TERMINATION / BASE STYLE

8 term	10 Term	Termination	Jumper
1	**2**	.250 TAB (QC) no barriers	No
A	**B**	.250 TAB (QC) with barriers	No
J	**K**	.250 TAB (QC) no barriers	Yes T2 to 5
3	**5**	Solder Lug no barriers	No
C	**D**	Solder Lug	No
5	**6**	Wire Leads no barriers	No
E	**F**	Wire Leads	No

Note: Codes J & K for circuits H, G & M. Do not use silicone based lubricants to reduce terminal insertion forces during connector assembly, as it is detrimental to function and performance.

5 ILLUMINATION & SWITCH SEALING
Lamp #1:above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch. Positive (+) and negative (-) symbols apply to LED lamps only

Sealed	Unsealed	Lamps	Illumination Type	Lamp wired to Terminals
S	**0**	NONE	–	–
C	**3**	2	UP	3 (+) 7 (–)
H	**Z**	2	INDEPENDENT	8 (+) 7 (–)
DOUBLE POLE SWITCHES ONLY				
M	**R**	1	UP	3 (+) 6 (–)

6 LOCK
Lock above terminals 1 & 4 end of switch
W lock

Notes:
Consult factory to verify horsepower rating for your particular circuit choice.
1 Custom colors are available. Consult factory.
2 White imprinting is standard on black actuators; Black imprinting is standard on white, red and gray actuators. Custom colors are available, consult factory.
3 Only available with 3 position circuits. Center OFF and special circuits only available with center position lock function.
4 Additional ratings available. See V-Series Switch Accessories page.

7 LAMP
Lamp above terminals 3 & 6 end of switch

No lamp	**0**				
Neon	**1** 125VAC	**2** 250VAC			
Incandescent	**4** 3V	**5** 6V	**6** 12V	**7** 18V	**8** 24V
LED*			superbright	superbright	
	Red	Amber	Green	Red	
2VDC	**A**	**L**	**F**	**R**	
6VDC	**B**	**M**	**G**	**S**	
12VDC	**C**	**N**	**H**	**T**	
24VDC	**D**	**P**	**J**	**V**	

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 FLUSH BRACKET COLOR [1], PANEL SEAL

	Black	White	Gray
No Seal	**B**	**W**	**G**
One Seal	**C**	**Y**	**H**

9 HARD SURFACE ACTUATOR [1]

	Black	Gray	Red	White
Contura II	**A**	**B**	**G**	**H**
Contura III	**C**	**D**	**E**	**F**

Actuator orientation above terminals:



10 LENS
Z - No Lens

Clear	White	Amber	Green	Red	Blue
3	**8**	**D**	**J**	**P**	**V**

Lens color for LEDs must be clear, white, or match color of LED. Green or blue lenses are not recommended with Neon lamps.

11 ACTUATOR LOCK FUNCTION AND COLOR [1]

Lock Color	Up	Down	Up & Down	Center [3]
Match Actuator	**A**	**H**	**R**	**1**
Black	**B**	**J**	**S**	**2**
White	**C**	**K**	**T**	**3**
Red	**D**	**L**	**V**	**4**
Safety Orange	**E**	**M**	**W**	**5**

12 ACTUATOR LENS OR BODY LEGEND [2]
00 - No Legend

21 OFF	**22** ON	**23** O	**24** I
25 O F F	**26** O N	**27** O	**28** I



For additional legend options & codes, visit us at www.carlingtech.com.

13 LEGEND ORIENTATION
0 No legend (used with codes 21-28 in selection 12)
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



Dimensional Specifications: in. [mm]

CONTURA II

SHOWN WITH
SQUARE LENS





8 TERMINAL BASE W/BARRIERS

CONTURA III





8 TERMINAL BASE W/O BARRIERS



8 TERMINAL BASE W/BARRIERS



10 TERMINAL BASE W/BARRIERS



SWITCH SHOWN WITH VCH CONNECTOR 8 TERMINAL



BOTTOM VIEW TERMINAL ARRANGEMENT 8 TERMINAL BASE



BOTTOM VIEW TERMINAL ARRANGEMENT 10 TERMINAL BASE



SWITCH SHOWN WITH VC1 CONNECTOR 10 TERMINAL

Circuit Diagrams:

CIRCUIT CODE	CIRCUIT DIAGRAM
1	
2	
3	
4	
5	
6	
7	
8	

CIRCUIT CODE	CIRCUIT DIAGRAM
A	
B	
C	
D	
E	
F	
G	
H	

CIRCUIT CODE	CIRCUIT DIAGRAM
J	
K	
L	
M	
R	
S	

SYMBOL LEGEND	
SYM.	DEFINITION
	DESIGNATES TERMINALS AND CONTACTS
	DESIGNATES MAINTAINED CIRCUITS
	DESIGNATES OTHER POSITION
	DESIGNATES MOMENTARY CIRCUITS
	DESIGNATES TWO POSITION CONNECTION
	DESIGNATES EXTERNAL JUMPER PROVIDED BY CUSTOMER

Lamp Circuit Diagrams:

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
A / 1	
B / 2	
C / 3	
D / 4	
E / 5	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
F / 6	
G / 7	
H / Z	
J / 8	
K / W	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
L / 9	
M / R	
N / T	
P / V	
U / Y	

LAMP CIRCUIT CODE	CIRCUIT DIAGRAM
SPECIAL #1	
SPECIAL #3	
SPECIAL #4	

J-Series Hazard Warning Circuit Diagrams:

CIRCUIT CODE	CIRCUIT DIAGRAM
J1	
J2	
J3	
J4	

CIRCUIT CODE	CIRCUIT DIAGRAM
J5	
JA	
JJ	
JK	

NOTE:
J circuits are available for all non-locking V-Series styles.
Consult factory for partnumber details.

SYMBOL LEGEND	
SYM.	DEFINITION
○	DESIGNATES TERMINALS AND CONTACTS
◯	DESIGNATES LAMP LOCATION

Reduce inventory levels and cost by stocking actuators and base switches separately.

Contura II, III, IV, V, VI, VII, X, XI, XII, XIV Base switches separately: specify **V** with code selections 2-8 in the ordering schemes.
Contura II, III, IV, V Actuator only: **VV** with code **A** or **C** for selection 9, & with selections 10-14 in the ordering schemes.
Contura VI Actuator with lenses and inserts only: **VV** with code selections 9-16
Contura II, III, IV, V, VII Actuator only: **VV** with code **A**, **C**, **E**, **G**, **P** or **Z** for selection 9 & with selections 10-14 in the ordering schemes.
Contura X, XI, XII, XIV actuators with lenses separately: **VV** with code selections 9-14 in the ordering schemes.
Panel Seal: VPS

Contura X & XI actuators without lenses separately:

VVR	6	1	00	1
1 Actuator Separately	*2 Actuator Style/Color*	*3 Lens Opening*	*4 Actuator Legend*	*5 Legend Orientation*

1 CONTURA X & XI ACTUATOR SEPARATELY
VVR

2 ACTUATOR STYLE & COLOR

	Black	Gray	White	Red
Contura X	**1**	**2**	**3**	**4**
Contura XI	**6**	**7**	**8**	**9**

3 LENS OPENING FOR [1]
1 One bar lens
2 One bar lenses
3 One square lens
4 two square lens
5 square lens on top/ bar lens on bottom (Contura X only)

4 ACTUATOR LENS OR BODY LEGEND
00 - No Legend this location
11 ON / OFF **12** OFF / ON **13** I / O **14** O / I
15 O O / F N / F F **16** O O / N F / F **17** O I **18** I O
For additional legend options & codes, visit us at www.carlingtech.com.

5 LEGEND ORIENTATION [1]
0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4

Contura X, XI & XII top piece of 2-piece lens separately:

VVT	1
1 Lens Separately	*2 Color*

1 TOP OF LENS SEPARATELY
VVT

2 COLOR
1 Clear **2** Smoke **3** White

Contura X, XI & XII actuator lens assembly:

1 piece lens/bar lens are positioned the same as bottom lens for assembly, minus the top lens. Lenses snap in from bottom.

Notes:
1 If actuator lens opening for 2 bar or 2 square lenses, legend orientation 0,1, or 2 must be chosen.
2 Center of actuator marking not available for Contura XII.
3 Legend is not available for bar style lens.
4 Not recommended with neon lamps.
5 Must also order top piece of 2 piece square lens separately.

Contura XII actuators without lenses separately:

VVP	J	1	Z	21	1	00
1 Actuator	*2 Style & Color*	*3 Lens Opening*	*4 Lens Opening*	*5 Legend*	*6 Legend Orientation*	*7 Legend*

1 CONTURA XII ACTUATOR SEPARATELY
VVP

2 ACTUATOR STYLE & COLOR
J Black **K** Gray **N** White **M** Red

3,4 LENS OPENING FOR
Z No lens **1** Bar lens **2** Square lens

5, 7 LENS OR BODY LEGEND [2]
00 - No Legend **21** OFF **22** ON **23** O **24** I
25 O F F **26** O N **27** O **28** I
For additional legend options & codes, visit us at www.carlingtech.com.

6 LEGEND ORIENTATION [3]
0 No legend
1 Orientation 1
2 Orientation 2



Contura X, XI & XII actuator lens assembly separately:

VVL	2	1	00	0
1 Lens Separately	*2 Lens Style*	*3 Lens Color*	*4 Legend*	*5 Legend Orientation*

1 CONTURA X, XI & XII LENS SEPARATELY
VVL

2 LENS STYLE [3]
1 Bar lens
2 One Piece Square lens
3 Bottom of Two-Piece Square lens [5]

3 TRANSLUCENT LENS COLOR
1 Clear **2** White **3** Amber **4** Green [4] **5** Red **6** Blue [4]

4 LENS OR BODY LEGEND [2]
00 - No Legend **21** OFF **22** ON **23** O **24** I
25 O F F **26** O N **27** O **28** I
For additional legend options & codes, visit us at www.carlingtech.com.

5 LEGEND ORIENTATION [3]
0 No legend
1 Orientation 1
2 Orientation 2
3 Orientation 3
4 Orientation 4



Easily integrate Contura products into your system, with Contura Accessories

Contura Connectors

Q.C. SELECTION GUIDE					
COMPANY SERIES	PART NO		WIRE RANGE		ORIEN-TATION
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM 2 (REF)	
PACKARD 58 SERIES	02965580		12	3.0	B
	02965471	12010601	(2)16-14	(2)1.0-2.0	
	02965470		16-14	1.0-2.0	
	02965469	06288318	20-18	.5-.8	
PACKARD METRI-PACK 630 SERIES		12084590	10	5.0	A
		12052224	12	3.0	
		12015870	16-14	1.0-2.0	
		12020035	(2)22-18	(2).5-.8	
	12015832	12015869	20-18	.5-.8	
		12052222	20-22	.35-.5	
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B
			(2) 16	(2) 1.3	
	42100-1	42100-2	18-14	.8-2	
	60295-1	60295-2	22-18	.3-.9	

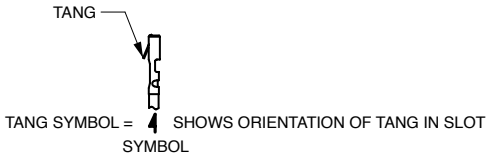

NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability.
AMP is a registered trademark of AMP Inc. Harrisburg, PA
Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warren, Ohio

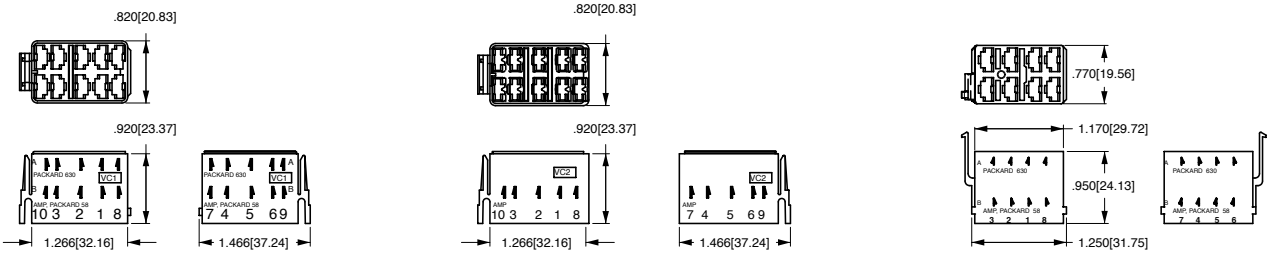

VC1 CONNECTOR HOUSING

VC2 CONNECTOR HOUSING (For AMP terminals only)

VCH CONNECTOR HOUSING

Contura X Boot (P/N VB1-01)

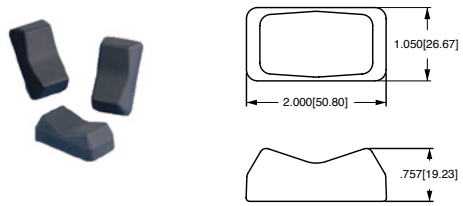

Contura II, III, IV, V, VI & VII Actuator Removal Tool (P/N VRT)

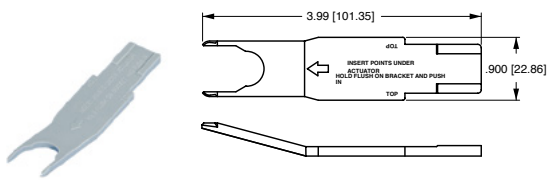

Additional V-Series Ratings

1	.4VA @ 28VDC Resistive
4	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
5 [1]	10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
B	15A 24V
C	20A 18V
D	20A 12V
E	20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
F	10A 14V, 6A, 14VT (circuit G only)
G	20A 6V
H	20A 3V
L [2]	15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
M	.4VA/20A 12V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)
N	.4VA/15A 24V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)

NOTES
Consult factory to determine availability for individual circuits and their HP rating.
1. Not available with Contura 7 or 14 rocker styles.
2. Rating L available with circuits 1, 4, A & D only.

Contura Mounting Panels
Dimensional Specifications: in. [mm]

MOUNTING PANEL
For additional units, add 1.03[26.2] per unit.
For more than 2 V-Series Switches, add middle section. Available in Panel Thicknesses listed below. Consult factory.

MOUNTING PANEL THICKNESS

.062[1.57]	.187[4.75]
.093[2.36]	.250[6.35]
.125[3.17]	.375[9.52]

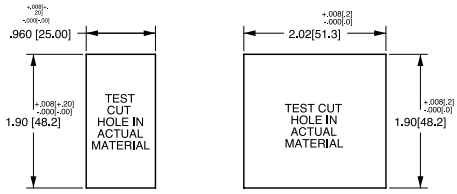

VMS MOUNTING PANEL HOLE

MOUNTING PANEL OPENING (2) UNITS

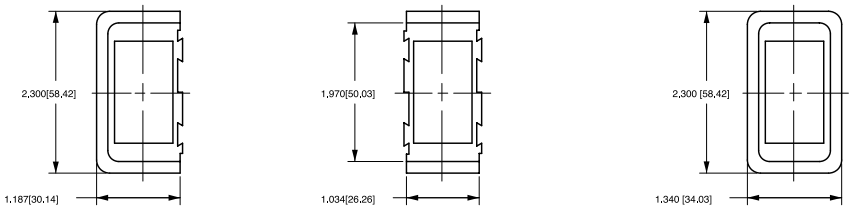

VME MOUNTING PANEL END

VMM MOUNTING PANEL MIDDLE

VMS MOUNTING PANEL

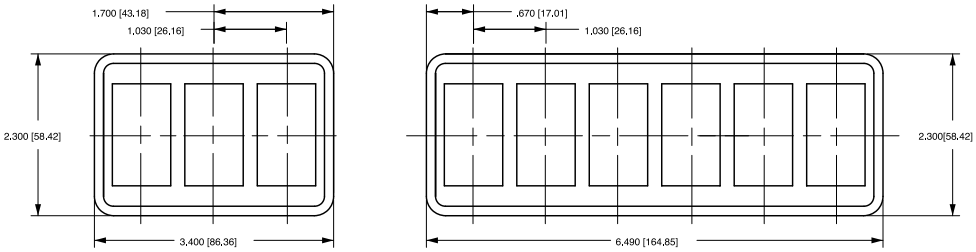

VM3 MOUNTING PANEL

VM6 MOUNTING PANEL

Contura Hole Plug
Dimensional Specifications: in. [mm]

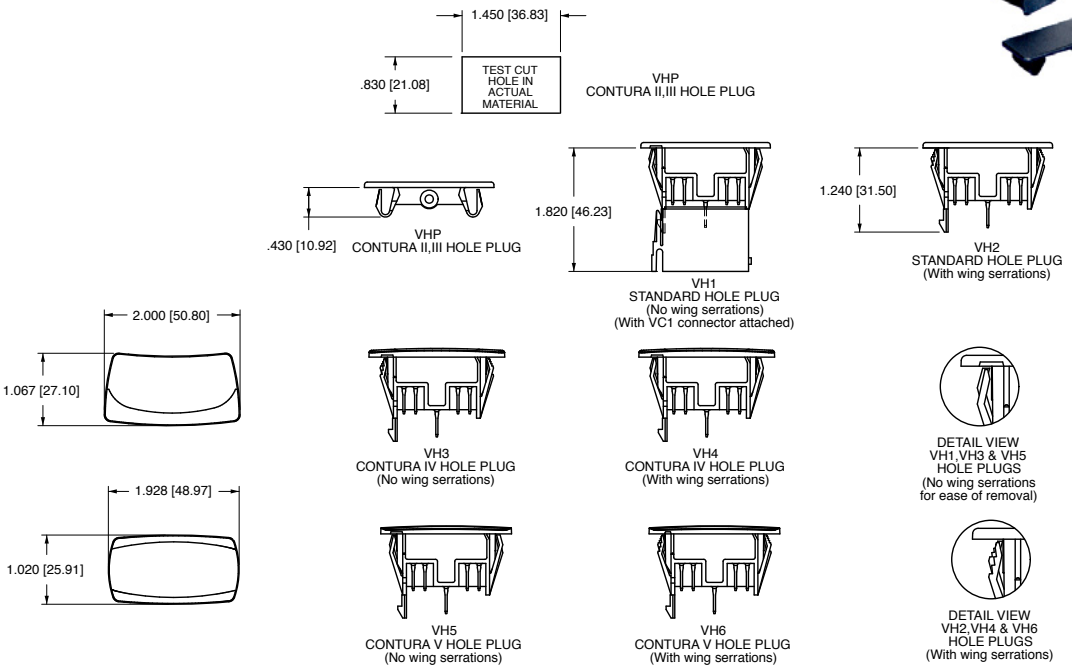

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit *www.carlingtech.com/findarep*.

About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit **www.carlingtech.com/company-profile.**

To view all of Carling's environmental, quality, health & safety certifications please visit **www.carlingtech.com/environmental-certifications**

Worldwide Headquarters
Carling Technologies, Inc.
60 Johnson Avenue, Plainville, CT 06062
Phone: 860.793.9281 **Fax:** 860.793.9231
Email: sales@carlingtech.com

Northern Region Sales Office: nrsm@carlingtech.com
Southeast Region Sales Office: sersm@carlingtech.com
Midwest Region Sales Office: mrsm@carlingtech.com
West Region Sales Office: wrsm@carlingtech.com
Latin America Sales Office: larsm@carlingtech.com

Asia-Pacific Headquarters
Carling Technologies, Asia-Pacific Ltd.,
Suite 1607, 16/F Tower 2, The Gateway,
Harbour City, 25 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Phone: Int + 852-2737-2277 **Fax:** Int + 852-2736-9332
Email: sales@carlingtech.com.hk

Shenzhen, China: shenzhen@carlingtech.com
Shanghai, China: shanghai@carlingtech.com
Pune, India: india@carlingtech.com
Kaohsiung, Taiwan: taiwan@carlingtech.com
Yokohama, Japan: japan@carlingtech.com

Europe | Middle East | Africa Headquarters
Carling Technologies LTD
4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK
Phone: Int + 44 1392.364422 **Fax:** Int + 44 1392.364477
Email: ltd.sales@carlingtech.com

Germany: gmbh@carlingtech.com
France: sas@carlingtech.com

Carling Technologies®
Innovative Designs. Powerful Solutions.