

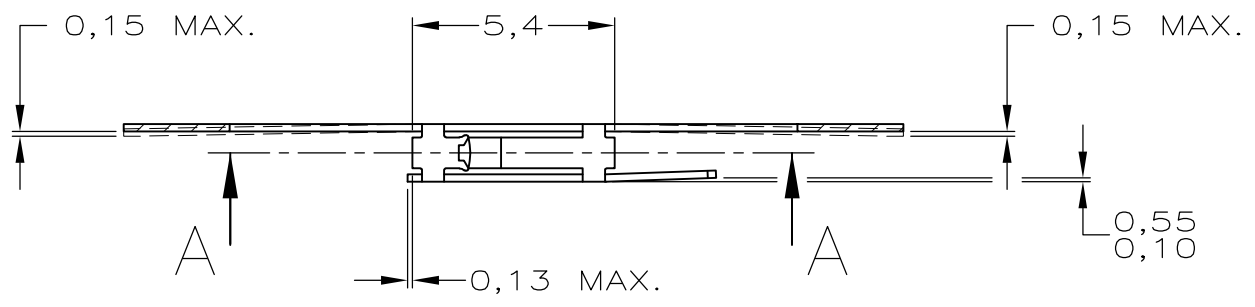
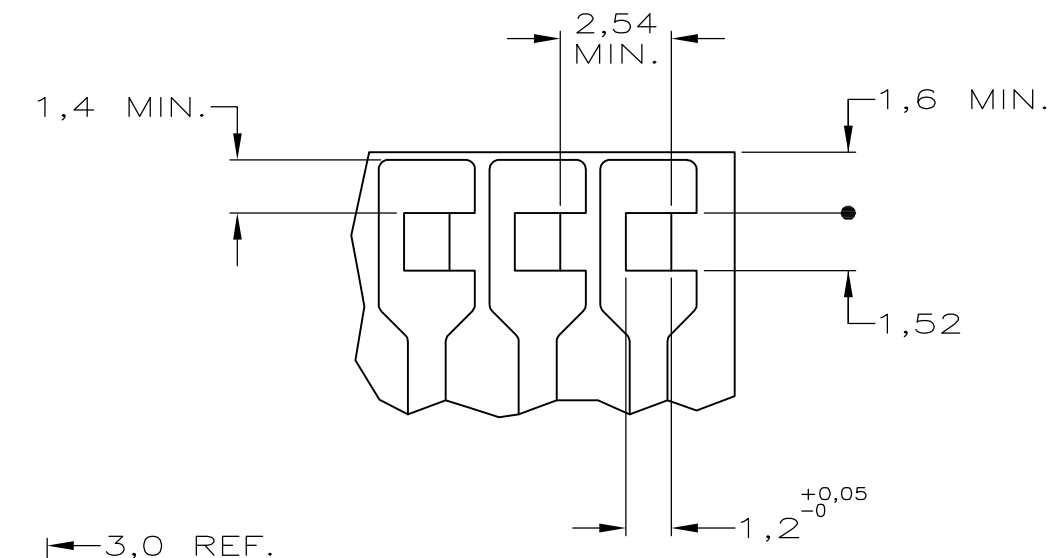


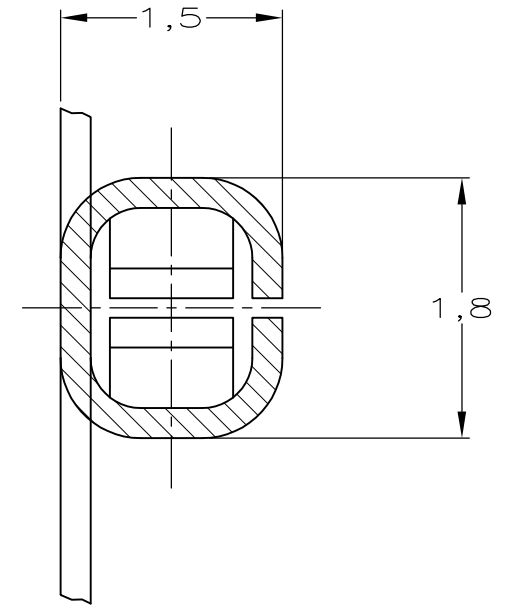

- NOTES:
- 1 SOLDERRESIST COATING.
 - 2 REELED FOR MINI APPLICATOR.
 - 3 REELED FOR STANDARD APPLICATOR.
 - 4 FOR PCB THICKNESS 1,6.
 - 5 FOR PCB THICKNESS 1,0.
 - 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

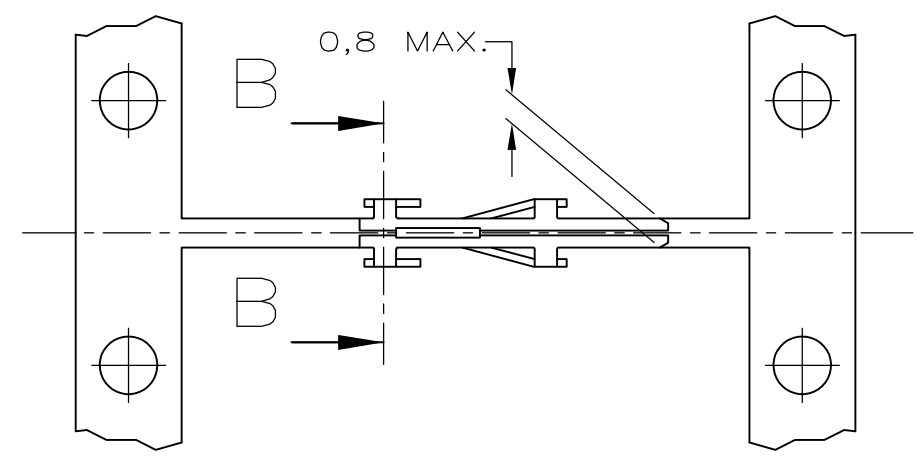


PWB LAYOUT

SECTION B-B
SCALE 20:1

SECTION A-A

TYPICAL APPLICATION

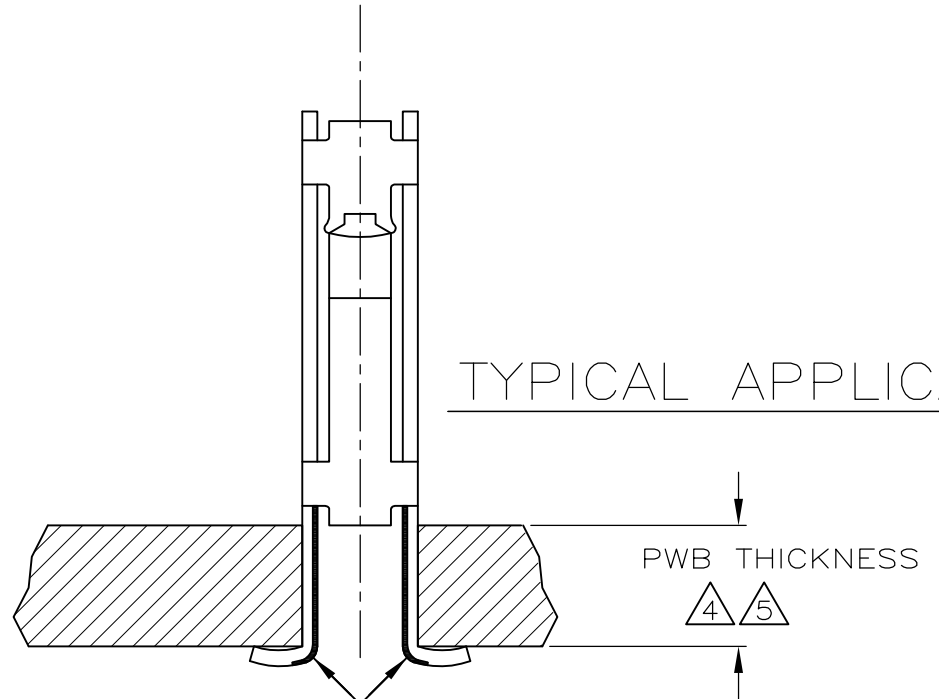

POST ENTRY

6 OBSOLETE

REV.	ECN No.	DR.	DATE
B1	REVISED PER ECO-09-020689	KK	29AUG09
B	EH-0962-00	RvH	05-09-00

REV.	ECN No.	DR.	DATE
B1	REVISED PER ECO-09-020689	KK	29AUG09
B	EH-0962-00	RvH	05-09-00

CUSTOMER DRAWING			B EH-0962-00 HOLLAND 05B09-00 's-Hertogenbosch, The Netherlands.		
	THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION ,19				
	© COPYRIGHT 19 - BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.				
FOR REFERENCE ONLY WILL NOT BE UPDATED					
DR. DATE D.KESSLER 09-01-91	WIRE RANGE -	NAME REC. CONTACT, MOD II STRIP, SHORT POINT OF CONTACT. (TYPE A).			REV.DATE D M Y
CHK. DATE M. v DRIEL 05-09-00	INSUL.RANGE -				050900
APP. DATE M. v DRIEL 05-09-00	SIZE A3	SHEET 1 OF 1	DWG. No.	167651	REV.LTR. B1