


DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION

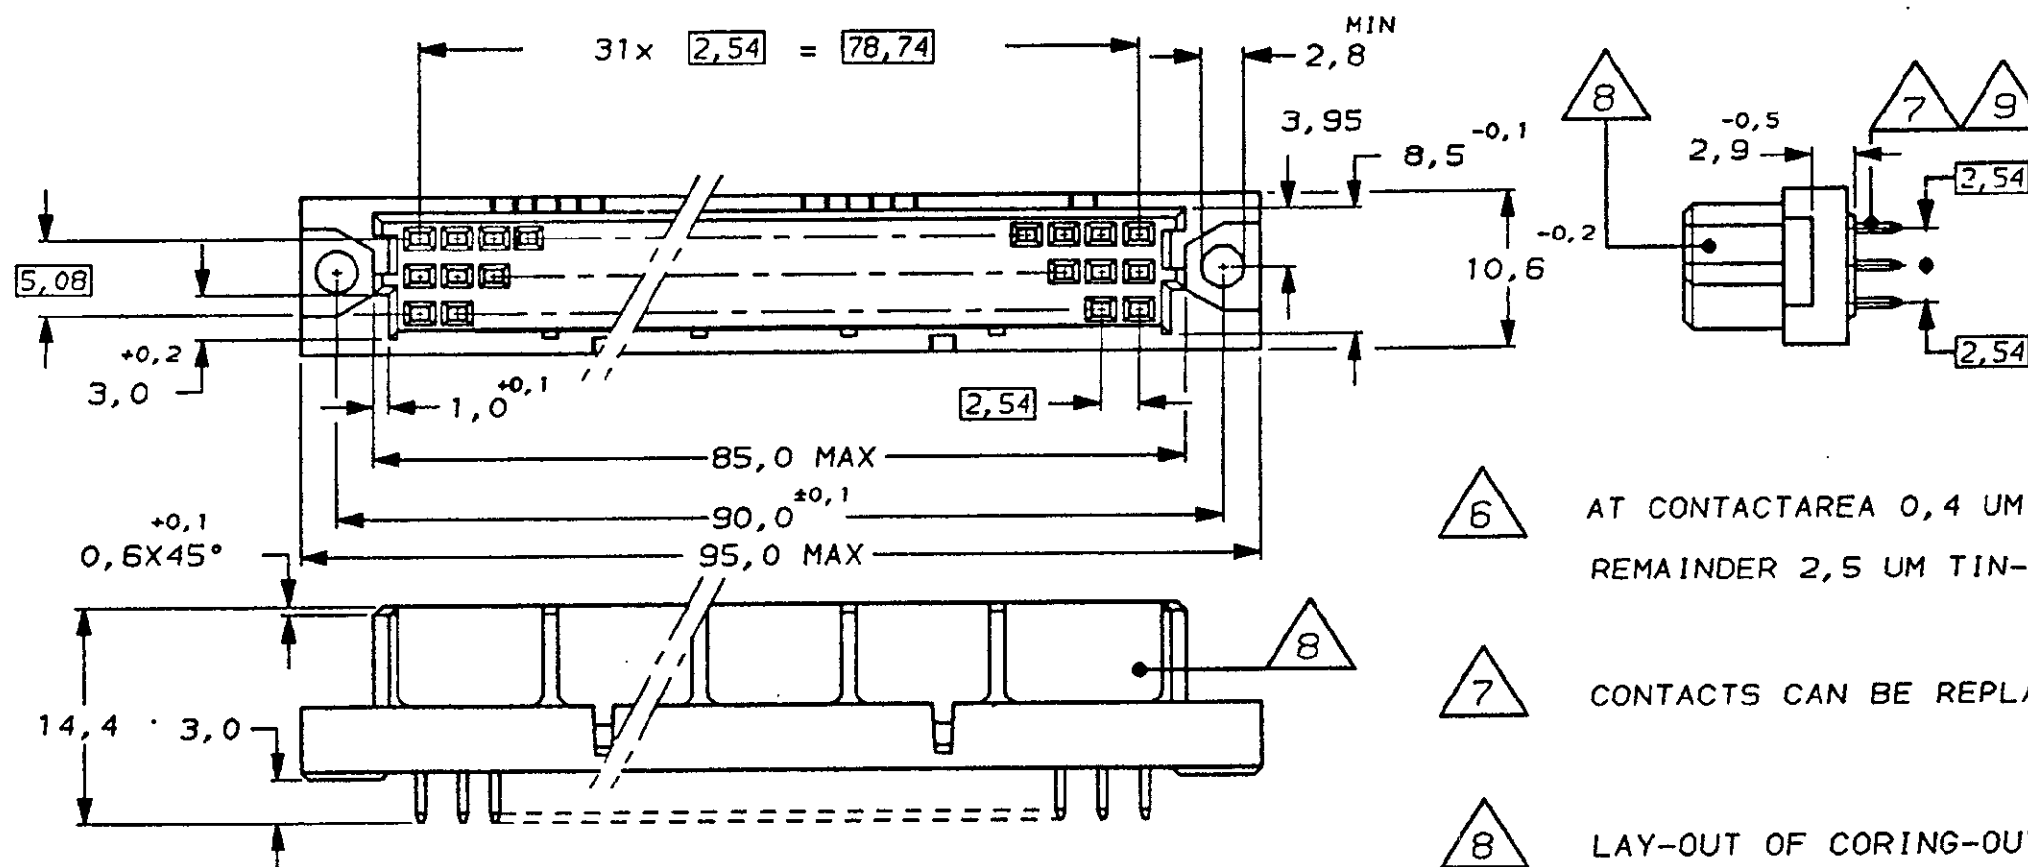

NOTES:

1 CONNECTOR MEETS THE REQUIREMENTS
ACC. DIN 41612 AND IEC 603-2 SPECIFICATION.

2 MATERIAL CONTACT: PHOSPHORBRONZE.
MATERIAL COVER: GLASSFILLED 30% THERM. POLYESTER.
COLOR GREY ACC: RAL 7032.

3 AT CONTACTAREA 1,25 UM GOLD OVER 1,25 UM NICKEL.
REMAINDER 2,5 UM TIN-LEAD (93/7).

4 AT CONTACTAREA 0,8 UM GOLD OVER 1,25 UM NICKEL.
REMAINDER 2,5 UM TIN-LEAD (93/7).

5 AT CONTACTAREA 2,0 UM GOLD OVER 1,25 UM NICKEL.
REMAINDER 2,5 UM TIN-LEAD (93/7).

6 AT CONTACTAREA 0,4 UM GOLD OVER 1,25 UM NICKEL.
REMAINDER 2,5 UM TIN-LEAD (93/7).

7 CONTACTS CAN BE REPLACED AFTER ASSEMBLING.

8 LAY-OUT OF CORING-OUTS OPTIONAL.

9 B.T.B. POST SUITABLE. FOR 1,0 ±0,1 MM. DIA HOLE
P.C.B. THICKNESS 1,6 MM.

10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

10	OBSOLETE	6	7	8
		5	4	
		3	2	1

CUSTOMER DWG for REFERENCE ONLY		THIS DRAWING IS UNCONTROLLED RELEASED FOR PUBLICATION	
TOLERANCES UNLESS OTHERWISE STATED DEC. ± 0,3 ANGLES ± 1°		INS. DIA. RANGE " " " "	
DR. E. LOPES 13.DEC.94		AMP do BRASIL LTDA. São Paulo, Brasil	
CHK. M. RUSSO 13.DEC.94		DESCRIPTION 96 POS FEMALE CONN. ASS'Y WITH B.T.B. CONTACTS.	
B2 REV PER ECO-10-000444		DWS NO A3 C-166 584	
B1 REDRAWN BY EC: LB-		SHEET 1 of 1	
ISS REVISION RECORD		APP M.E. DINIZ 14/01/94	

8

7

6

5

4

3

2

1