


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-39-50

REVISIONS	
ISSUE	CHANGES
4	CN 18687 C GMF 11/05/79

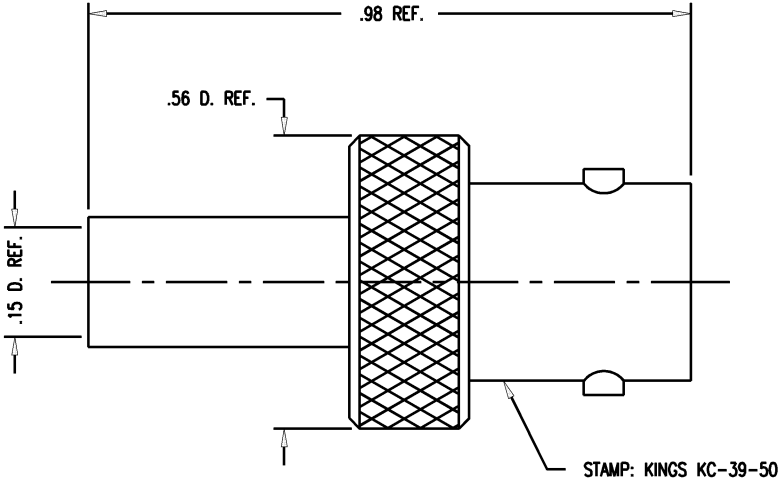

- NOTES:
- FOR USE WITH RG-174, 179A, 179B, 187, 187A, 188, & 188A/U CABLE.
 - FOR CABLING INSTRUCTIONS SEE CP-406.
 - FOR CABLE TRIMMING USE KTJ-38.
 - FOR CRIMPING USE DIE KTH-2032.
 - MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: COM. BRONZE TUBING, ALLOY 220
CENTER CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, QQ-B-626
 - FINISHES:
CENTER CONTACT } SILVER PLATE, QQ-S-365
CRIMP CONTACT }
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
 - ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz.

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
JACK, BNC	
DRAWN WJM	DATE 02/19/91
DESIGN MJB	DATE 02/22/91
APPR.	DATE
 ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
KC-39-50	

GSD