


VLF403215MT-4R7M-CA

Applications	 Automotive Grade
Feature	Wire Wound Wire Wound Shield Magnetic Shield Ferrite Core Ferrite Core AEC-Q200 AEC-Q200
Series	VLF-M Series / VLF403215MT-CA Type
Status	PROD

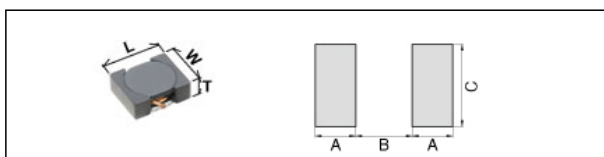


Size	
Length(L)	4.00mm +/-0.20mm
Width(W)	3.20mm +/-0.20mm
Thickness(T)	1.50mm Max.
Recommended Land Pattern (A)	1.10mm Nom.
Recommended Land Pattern (B)	1.30mm Nom.
Recommended Land Pattern (C)	1.80mm Nom.

Electrical Characteristics	
Inductance	4.7uH +/-20% at 1MHz
Rated Current (L Change) [Typ.]	1.54A (30% Down)
Rated Current (L Change) [Max.]	1.39A (30% Down)
Rated Current (Temperature Rise) [Typ.]	2.13A (40degC Rise)
DC Resistance [Nom.]	73mΩ
DC Resistance [Max.]	87mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.
Weight	0.072g

VLF403215MT-4R7M-CA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

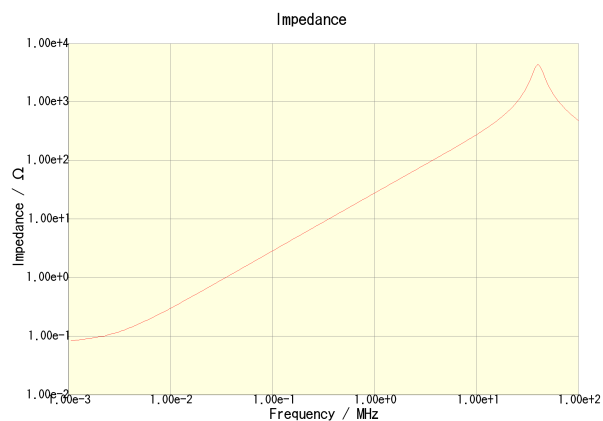


VLF403215MT-4R7M-CA

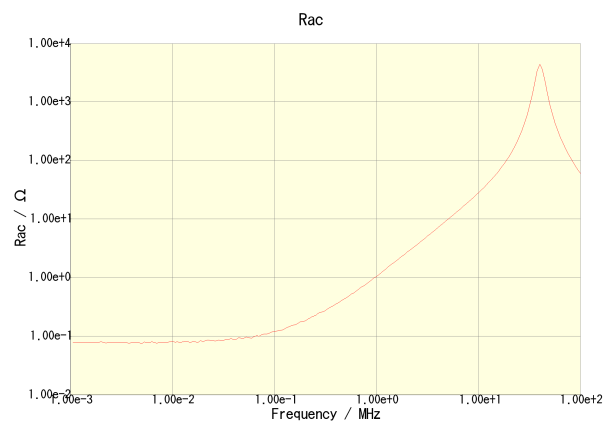

VLF403215MT-4R7M-CA

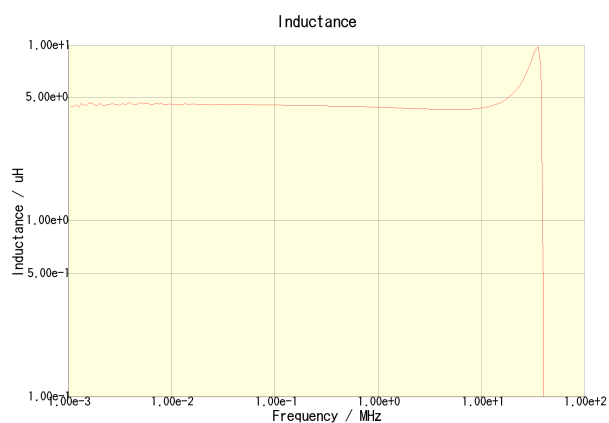


VLF403215MT-4R7M-CA

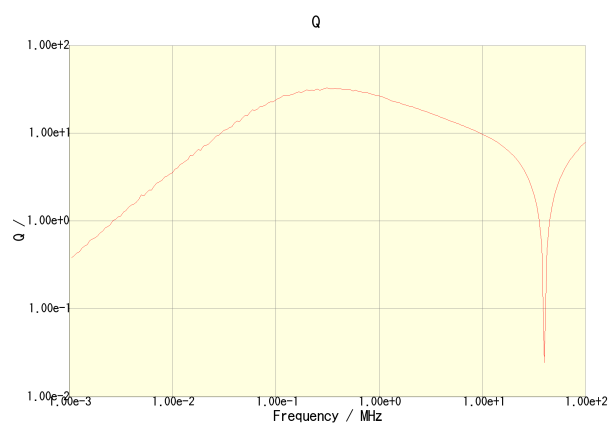


VLF403215MT-4R7M-CA

VLF403215MT-4R7M-CA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

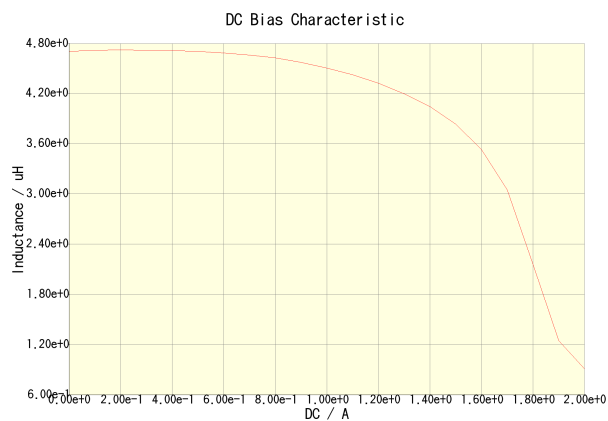


VLF403215MT-4R7M-CA(Amb. Temp. = 20degc)

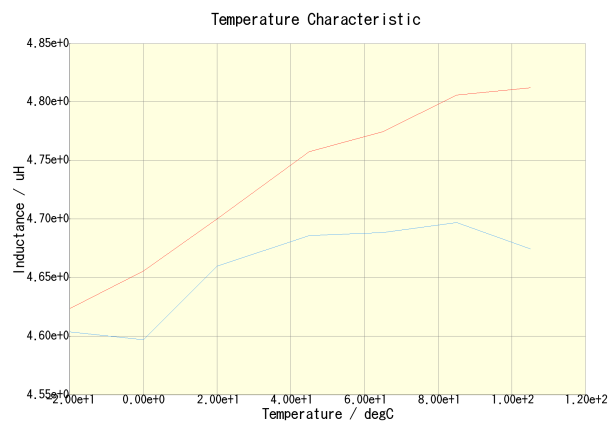

VLF403215MT-4R7M-CA(DC = 0A)

VLF403215MT-4R7M-CA(DC = 0.695A)

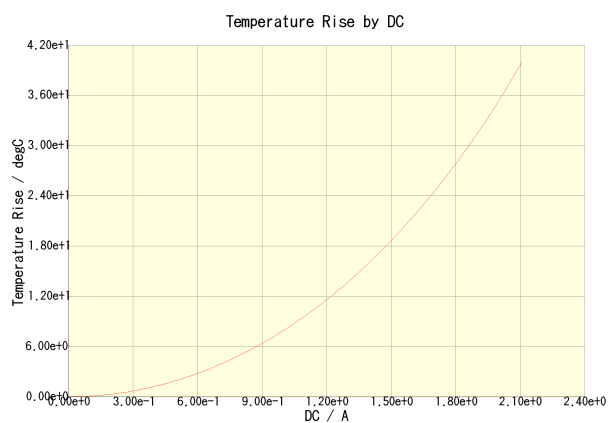

VLF403215MT-4R7M-CA(Amb. Temp. = 20degc)