

BCM112X HIGH-PERFORMANCE MIPS PROCESSORS

BCM112X FEATURES

- **Two processors in 112x product line:**
 - BCM1125H: 600 MHz – 1 GHz
 - BCM1125: 400 MHz – 800 MHz
- **MIPS64™ CPU**
 - Quad-issue in order pipeline; dual execute, dual memory pipes
 - Enhanced skew pipeline enables zero load-to-use penalty
 - 32-KB instruction cache, 32-KB data cache
 - Advanced branch predictors
- **Fast, on-chip memory-coherent bus (ZBbus)**
 - Connects the CPU, L2 cache, memory controller and I/O bridges
 - Runs at half the CPU core clock; 256 bits wide
- **On-chip L2 cache**
 - 256KB, shared by CPU and I/O bridges
 - Four-way associative, ECC protected
 - Ways can be removed to provide fast on-chip RAM
- **DDR memory controller**
 - One channel with a 64-bit data bus plus ECC
 - Runs up to 200 MHz clock rate, 400 Mbps data rate
 - Support for DDR SDRAM, SGRAM, and FCRAM
- **High-speed packet interfaces**
 - Two 10/100/1000 Ethernet MACs; 802.3 compliant
 - Option to configure MACs into packet FIFOs to enable OC-48 data rates
- **PCI interface**
 - 32-bit, 33/66 MHz PCI 2.2
 - Host bridge or target device
- **BCM1125H: HyperTransport (LDT) I/O interface**
 - Complies with HyperTransport standard for high-speed I/O fabric
 - 600-MHz clock rate, 1.2 Gbps data rate
 - Peak bandwidth of 19.2 Gbps on 8-bit link
 - Supports double-ended fabrics (linking two BCM1125Hs or BCM1125H and BCM1250)
- **Integrated system I/O**
 - Generic I/O for direct connect to boot ROM, FLASH, fast peripherals/ASICs
 - SMBus serial configuration interface
 - PCMCIA control interface
 - Two serial interfaces
- **Extensive, on-chip debug features**
- **4W @ 400 MHz**
- **Software-compatible with BCM1250**
- **Support for leading operating systems including VxWorks®, Linux®, NetBSD and QNX**
- **Evaluation board platform available with tools, firmware and software drivers**

SUMMARY OF BENEFITS

- **Industry-leading performance**
 - 2 Dhystone MIPS/MHz
 - Processing speed of up to 5 Mpps*
 - 128-Gbps on-chip bus bandwidth, 26-Gbps memory bandwidth, up to 29-Gbps total I/O bandwidth
- **Low power dissipation starting at less than 4W @ 400 MHz**
- **High functional integration**
- **Programming ease and flexibility based on MIPS64 ISA**
- **Scalable system architecture**
- **Broad tools and system software support**
- **Software-compatible with BCM1250**


*Based on internal Broadcom benchmark, using BCM112x for standard IPv4 L3 look-up/switiching.


SUMMARY OF BENEFITS

The BCM112x's world-class performance, power efficiency and integration makes these processors ideal for a broad variety of systems including:

- Networking: routers, switches
- Control plane processing
- Line cards
- Broadband access: DSLAM, CMTS, BRAS
- Wireless base stations
- Storage: RAID controllers, NAS controllers, HBAs
- Web/networking/caching appliances
- Imaging: printers, copiers

Example: PCI card for TCP/IP Acceleration

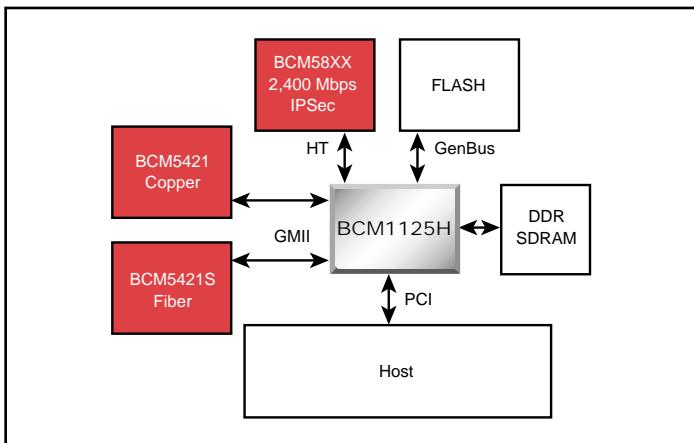

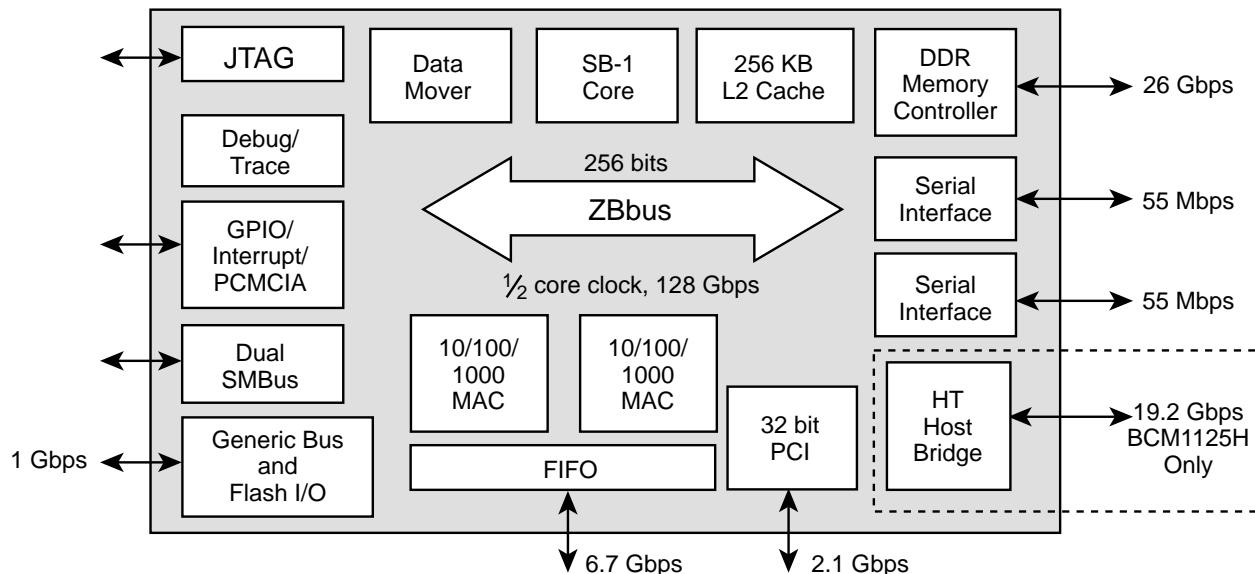

Broadcom's **BCM112x** products are state-of-the-art processor solutions targeted at the fast-growing networking, wireless communications, storage, server/networking appliance and imaging markets. The **BCM112x** processors offer the industry-leading performance, high functional integration, and low power levels in a small package required by next-generation networking applications.

The BCM1125H and BCM1125 are software-compatible with the dual-processor BCM1250 and share the development and modeling tools, the firmware, and the operating systems with that processor. The **BCM112x** processors are intelligent systems on a chip consisting of a Broadcom SB-1 high performance MIPS64 CPU, a shared 256-KB L2 cache, a DDR memory controller, and an integrated I/O. All major blocks of the processor are connected together via the ZBbus, a high-speed, low-latency, split-transaction, memory-coherent bus. The bus implements the standard MESI protocol to ensure coherency between the CPU, L2 cache, I/O agents, and memory.

Two Gigabit Ethernet MACs (10/100/1000) enable easy interfacing to LANs. To enable higher data rates, or in cases where Ethernet protocol processing is not required, each MAC can be configured as an 8-bit packet FIFO, or both can be combined into a 16-bit packet FIFO. High-speed I/O is provided using a 66-MHz (rev 2.2) PCI local bus and, on the BCM1125H, AMD's HyperTransport™ (LDT) I/O fabric in addition to PCI.

Broadcom®, the pulse logo®, **Connecting Everything**™ and **SiByte**™ are trademarks of Broadcom Corporation and/or its subsidiaries in the United States and certain other countries. All other trademarks are the property of their respective owners.

Connecting
everything™

BROADCOM CORPORATION
16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013
© 2002 by BROADCOM CORPORATION. All rights reserved.
112X-PB01-R-3.5.02

Two serial ports are provided for WAN connections at up to T3/OC-1 rates (55 Mbps). To enable low-chip-count systems, the **BCM112x** processors also include a configurable generic bus that allows glueless connection of a boot ROM or FLASH memory and simple I/O peripherals. On-chip debugging, tracing, and performance monitoring functions assist both hardware and software designers in debugging and tuning the system. The system can be run in either big- or little-endian mode. The **BCM112x** processors are manufactured in TSMC's 0.13- μ process, and are packaged in pin-compatible 31-mm BGA packages.

Implementation of MIPS64 ISA

The SB-1 CPU core is a high-performance implementation of the standard MIPS64 Instruction Set Architecture (ISA), and incorporates the MIPS-3D and MIPS-MDMX Application Specific Extensions (ASEs). The core supports a four-issue enhanced skew pipeline and can dispatch up to two memory and two ALU (Integer, Floating Point, MDMX or MIPS-3D) instructions per cycle.



Phone: 949-450-8700
FAX: 949-450-8710
Email: info@broadcom.com
Web: www.broadcom.com