

---

# **VOLTAGE REGULATOR**

## **R×5RL SERIES**

### **APPLICATION MANUAL**

# **RICOH**

**ELECTRONIC DEVICES DIVISION**

## NOTICE

---

1. The products and the product specifications described in this application manual are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. This application manual may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this application manual shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, computer equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire-containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this application manual.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

June 1995

# R×5RL SERIES

## APPLICATION MANUAL

### CONTENTS

---

|                                                     |           |
|-----------------------------------------------------|-----------|
| <b>OUTLINE</b>                                      | <b>1</b>  |
| <b>FEATURES</b>                                     | <b>1</b>  |
| <b>APPLICATIONS</b>                                 | <b>1</b>  |
| <b>BLOCK DIAGRAM</b>                                | <b>1</b>  |
| <b>SELECTION GUIDE</b>                              | <b>2</b>  |
| <b>PIN CONFIGURATION</b>                            | <b>3</b>  |
| <b>PIN DESCRIPTION</b>                              | <b>3</b>  |
| <b>ABSOLUTE MAXIMUM RATINGS</b>                     | <b>4</b>  |
| <b>ELECTRICAL CHARACTERISTICS</b>                   | <b>5</b>  |
| <b>ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE</b> | <b>8</b>  |
| <b>OPERATION</b>                                    | <b>10</b> |
| <b>TEST CIRCUITS</b>                                | <b>10</b> |
| <b>TYPICAL CHARACTERISTICS</b>                      | <b>11</b> |
| 1) Output Voltage vs. Output Current                | 11        |
| 2) Output Voltage vs. Input Voltage                 | 11        |
| 3) Dropout Voltage vs. Output Current               | 12        |
| 4) Output Voltage vs. Temperature                   | 13        |
| 5) Quiescent Current vs. Input Voltage              | 14        |
| 6) Quiescent Current vs. Temperature                | 14        |
| 7) Dropout Voltage vs. Set Output Voltage           | 15        |
| 8) Line Transient Response (1)                      | 15        |
| 9) Line Transient Response (2)                      | 15        |
| <b>TYPICAL APPLICATION</b>                          | <b>16</b> |
| <b>APPLICATION CIRCUITS</b>                         | <b>16</b> |
| <b>PACKAGE DIMENSIONS</b>                           | <b>18</b> |
| <b>TAPING SPECIFICATIONS</b>                        | <b>19</b> |

### R×5RL SERIES

## OUTLINE

The R×5RL Series are voltage regulator ICs with high accuracy output voltage and ultra-low quiescent current by CMOS process. Each of these ICs consists of a voltage reference unit, an error amplifier, a driver transistor, and resistors for setting output voltage. The output voltage is fixed with high accuracy.

Three types of packages, TO-92, SOT-89 (Mini-power Mold), SOT-23-5 (Mini-mold), are available.


## FEATURES

- Ultra-low Quiescent Current .....TYP. 1.1 $\mu$ A (R×5RL30A,  $V_{IN}$ =5.0V)
- Small Dropout Voltage .....TYP. 30mV (R×5RL50A,  $I_{OUT}$ =1mA)
- Low Temperature-Drift Coefficient of Output Voltage.....TYP.  $\pm 100$  ppm/ $^{\circ}$ C
- Excellent Line Regulation.....TYP. 0.1%/V
- Output Voltage .....Stepwise setting with a step of 0.1V in the range of 2.0V to 6.0V is possible (refer to Selection Guide).
- High Accuracy Output Voltage..... $\pm 2.5\%$
- Three Types of Packages.....TO-92, SOT-89 (Mini-power Mold), SOT-23-5 (Mini-mold)

## APPLICATIONS

- Power source for battery-powered equipment.
- Power source for cameras, video instruments such as camcorders, VCRs, and hand-held communication equipment.
- Precision voltage references.

## BLOCK DIAGRAM

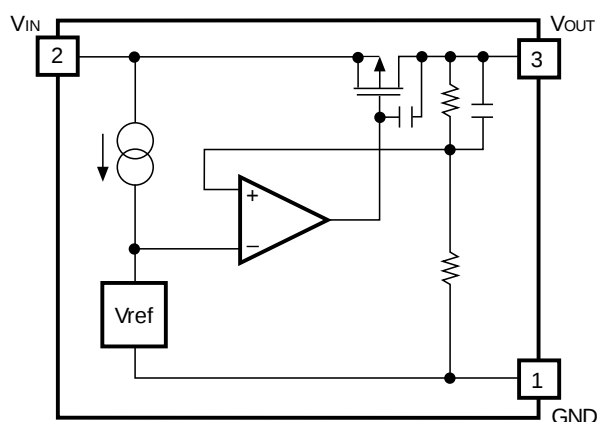

## SELECTION GUIDE

The package type, the output voltage, the packing type, and the taping type of R×5RL Series can be designated at the user's request by specifying the part number as follows:


R×5RL×××× - ×× ← Part Number  
 ↑      ↑↑↑      ↑  
 a      b c d      e

| Code | Contents                                                                                                                                                                                |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a    | Designation of Package Type:<br>E: TO-92<br>H: SOT-89 (Mini-power Mold)<br>N: SOT-23-5 (Mini-mold)                                                                                      |
| b    | Setting Output Voltage (V <sub>OUT</sub> ):<br>Stepwise setting with a step of 0.1V in the range of 2.0V to 6.0V is possible.                                                           |
| c    | A                                                                                                                                                                                       |
| d    | Designation of Packing Type:<br>A: Taping<br>C: Antistatic bag for TO-92 and samples                                                                                                    |
| e    | Designation of Taping Type:<br>Ex. TO-92 : RF, RR, TZ<br>SOT-89 : T1, T2<br>SOT-23-5 : TR, TL<br>(refer to Taping Specifications)<br>“TZ”, “T1”, and “TR” are prescribed as a standard. |


For example, the product with Package Type SOT-89, Output Voltage 5.0V, Version A, and Taping Type T1 are designated by Part Number RH5RL50AA-T1.

## PIN CONFIGURATION


### • TO-92

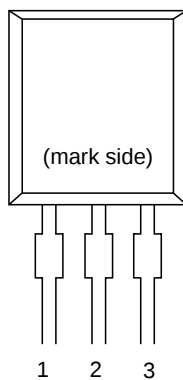

### • SOT-89



### • SOT-23-5



## PIN DESCRIPTION

### • TO-92

| Pin No. | Symbol           |
|---------|------------------|
| 1       | GND              |
| 2       | V <sub>IN</sub>  |
| 3       | V <sub>OUT</sub> |

### • SOT-89

| Pin No. | Symbol           |
|---------|------------------|
| 1       | GND              |
| 2       | V <sub>IN</sub>  |
| 3       | V <sub>OUT</sub> |

### • SOT-23-5

| Pin No. | Symbol           |
|---------|------------------|
| 1       | GND              |
| 2       | V <sub>IN</sub>  |
| 3       | V <sub>OUT</sub> |
| 4       | NC               |
| 5       | NC               |

## ABSOLUTE MAXIMUM RATINGS

T<sub>opt</sub>=25°C

| Symbol              | Item                         | Rating                       | Unit |
|---------------------|------------------------------|------------------------------|------|
| V <sub>IN</sub>     | Input Voltage                | +12                          | V    |
| V <sub>OUT</sub>    | Output Voltage               | −0.3 to V <sub>IN</sub> +0.3 | V    |
| I <sub>OUT</sub>    | Output Current               | 150                          | mA   |
| P <sub>D1</sub>     | Power Dissipation 1 (NOTE1)  | 300                          | mW   |
| P <sub>D2</sub>     | Power Dissipation 2 (NOTE2)  | 150                          | mW   |
| T <sub>opt</sub>    | Operating Temperature        | − 30 to +80                  | °C   |
| T <sub>stg</sub>    | Storage Temperature          | − 55 to +125                 | °C   |
| T <sub>solder</sub> | Lead Temperature (Soldering) | 260°C, 10s                   |      |

(NOTE 1) applied to SOT-89 and TO-92

(NOTE 2) applied to SOT-23-5

## ABSOLUTE MAXIMUM RATINGS

Absolute Maximum ratings are threshold limit values that must not be exceeded even for an instant under any conditions. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

## ELECTRICAL CHARACTERISTICS

## • R×5RL20A

T<sub>opt</sub>=25°C

| Symbol                                  | Item                                   | Conditions                                                           | MIN.  | TYP.  | MAX.  | Unit   |
|-----------------------------------------|----------------------------------------|----------------------------------------------------------------------|-------|-------|-------|--------|
| V <sub>OUT</sub>                        | Output Voltage                         | V <sub>IN</sub> =4.0V<br>10μA≤I <sub>OUT</sub> ≤10mA                 | 1.950 | 2.000 | 2.050 | V      |
| I <sub>OUT</sub>                        | Output Current                         | V <sub>IN</sub> =4.0V                                                | 25    | 35    |       | mA     |
| $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Load Regulation                        | V <sub>IN</sub> =4.0V<br>1mA≤I <sub>OUT</sub> ≤35mA                  |       | 30    | 45    | mV     |
| V <sub>DIF</sub>                        | Dropout Voltage                        | I <sub>OUT</sub> =1mA                                                |       | 60    | 90    | mV     |
| I <sub>SS</sub>                         | Quiescent Current                      | V <sub>IN</sub> =4.0V                                                |       | 1.0   | 3.0   | μA     |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | Line Regulation                        | I <sub>OUT</sub> =1mA<br>V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤10V |       | 0.05  | 0.2   | %/V    |
| V <sub>IN</sub>                         | Input Voltage                          |                                                                      |       |       | 10    | V      |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage Temperature Coefficient | I <sub>OUT</sub> =10mA<br>-30°C≤T <sub>opt</sub> ≤80°C               |       | ±100  |       | ppm/°C |

## • R×5RL30A

T<sub>opt</sub>=25°C

| Symbol                                  | Item                                   | Conditions                                                           | MIN.  | TYP.  | MAX.  | Unit   |
|-----------------------------------------|----------------------------------------|----------------------------------------------------------------------|-------|-------|-------|--------|
| V <sub>OUT</sub>                        | Output Voltage                         | V <sub>IN</sub> =5.0V<br>10μA≤I <sub>OUT</sub> ≤10mA                 | 2.925 | 3.000 | 3.075 | V      |
| I <sub>OUT</sub>                        | Output Current                         | V <sub>IN</sub> =5.0V                                                | 35    | 50    |       | mA     |
| $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Load Regulation                        | V <sub>IN</sub> =5.0V<br>1mA≤I <sub>OUT</sub> ≤50mA                  |       | 40    | 60    | mV     |
| V <sub>DIF</sub>                        | Dropout Voltage                        | I <sub>OUT</sub> =1mA                                                |       | 40    | 60    | mV     |
| I <sub>SS</sub>                         | Quiescent Current                      | V <sub>IN</sub> =5.0V                                                |       | 1.1   | 3.3   | μA     |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | Line Regulation                        | I <sub>OUT</sub> =1mA<br>V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤10V |       | 0.05  | 0.2   | %/V    |
| V <sub>IN</sub>                         | Input Voltage                          |                                                                      |       |       | 10    | V      |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage Temperature Coefficient | I <sub>OUT</sub> =10mA<br>-30°C≤T <sub>opt</sub> ≤80°C               |       | ±100  |       | ppm/°C |

• R×5RL40A

T<sub>opt</sub>=25°C

| Symbol                                  | Item                                      | Conditions                                                           | MIN.  | TYP.  | MAX.  | Unit   |
|-----------------------------------------|-------------------------------------------|----------------------------------------------------------------------|-------|-------|-------|--------|
| V <sub>OUT</sub>                        | Output Voltage                            | V <sub>IN</sub> =6.0V<br>10μA≤I <sub>OUT</sub> ≤10mA                 | 3.900 | 4.000 | 4.100 | V      |
| I <sub>OUT</sub>                        | Output Current                            | V <sub>IN</sub> =6.0V                                                | 45    | 65    |       | mA     |
| $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Load Regulation                           | V <sub>IN</sub> =6.0V<br>1mA≤I <sub>OUT</sub> ≤65mA                  |       | 50    | 75    | mV     |
| V <sub>DIF</sub>                        | Dropout Voltage                           | I <sub>OUT</sub> =1mA                                                |       | 25    | 38    | mV     |
| I <sub>SS</sub>                         | Quiescent Current                         | V <sub>IN</sub> =6.0V                                                |       | 1.2   | 3.6   | μA     |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | Line Regulation                           | I <sub>OUT</sub> =1mA<br>V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤10V |       | 0.05  | 0.2   | %/V    |
| V <sub>IN</sub>                         | Input Voltage                             |                                                                      |       |       | 10    | V      |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage<br>Temperature Coefficient | I <sub>OUT</sub> =10mA<br>-30°C≤T <sub>opt</sub> ≤80°C               |       | ±100  |       | ppm/°C |

• R×5RL50A

T<sub>opt</sub>=25°C

| Symbol                                  | Item                                      | Conditions                                                           | MIN.  | TYP.  | MAX.  | Unit   |
|-----------------------------------------|-------------------------------------------|----------------------------------------------------------------------|-------|-------|-------|--------|
| V <sub>OUT</sub>                        | Output Voltage                            | V <sub>IN</sub> =7.0V<br>10μA≤I <sub>OUT</sub> ≤10mA                 | 4.875 | 5.000 | 5.125 | V      |
| I <sub>OUT</sub>                        | Output Current                            | V <sub>IN</sub> =7.0V                                                | 55    | 80    |       | mA     |
| $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Load Regulation                           | V <sub>IN</sub> =7.0V<br>1mA≤I <sub>OUT</sub> ≤80mA                  |       | 60    | 90    | mV     |
| V <sub>DIF</sub>                        | Dropout Voltage                           | I <sub>OUT</sub> =1mA                                                |       | 25    | 38    | mV     |
| I <sub>SS</sub>                         | Quiescent Current                         | V <sub>IN</sub> =7.0V                                                |       | 1.3   | 3.9   | μA     |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | Line Regulation                           | I <sub>OUT</sub> =1mA<br>V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤10V |       | 0.05  | 0.2   | %/V    |
| V <sub>IN</sub>                         | Input Voltage                             |                                                                      |       |       | 10    | V      |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage<br>Temperature Coefficient | I <sub>OUT</sub> =10mA<br>-30°C≤T <sub>opt</sub> ≤80°C               |       | ±100  |       | ppm/°C |

• R×5RL60A

T<sub>opt</sub>=25°C

| Symbol                                  | Item                                      | Conditions                                                           | MIN.  | TYP.  | MAX.  | Unit   |
|-----------------------------------------|-------------------------------------------|----------------------------------------------------------------------|-------|-------|-------|--------|
| V <sub>OUT</sub>                        | Output Voltage                            | V <sub>IN</sub> =8.0V<br>10μA≤I <sub>OUT</sub> ≤10mA                 | 5.850 | 6.000 | 6.150 | V      |
| I <sub>OUT</sub>                        | Output Current                            | V <sub>IN</sub> =8.0V                                                | 55    | 80    |       | mA     |
| $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Load Regulation                           | V <sub>IN</sub> =8.0V<br>1mA≤I <sub>OUT</sub> ≤80mA                  |       | 60    | 90    | mV     |
| V <sub>DIF</sub>                        | Dropout Voltage                           | I <sub>OUT</sub> =1mA                                                |       | 25    | 38    | mV     |
| I <sub>SS</sub>                         | Quiescent Current                         | V <sub>IN</sub> =8.0V                                                |       | 1.3   | 3.9   | μA     |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | Line Regulation                           | I <sub>OUT</sub> =1mA<br>V <sub>OUT</sub> +0.5V≤V <sub>IN</sub> ≤10V |       | 0.05  | 0.2   | %/V    |
| V <sub>IN</sub>                         | Input Voltage                             |                                                                      |       |       | 10    | V      |
| $\frac{\Delta V_{OUT}}{\Delta T_{opt}}$ | Output Voltage<br>Temperature Coefficient | I <sub>OUT</sub> =10mA<br>−30°C≤T <sub>opt</sub> ≤80°C               |       | ±100  |       | ppm/°C |

## ELECTRICAL CHARACTERISTICS BY OUTPUT VOLTAGE

| Part Number | Output Voltage                                      |       |       |       | OutputCurrent         |                                                    |      | Load Regulation                                    |      |      | Dropout Voltage |      |      |
|-------------|-----------------------------------------------------|-------|-------|-------|-----------------------|----------------------------------------------------|------|----------------------------------------------------|------|------|-----------------|------|------|
|             | Vout(V)                                             |       |       |       | Iout(mA)              |                                                    |      | ΔVout(mV)                                          |      |      | VDIF (mV)       |      |      |
|             | Conditions                                          | MIN.  | TYP.  | MAX.  | Conditions            | MIN.                                               | TYP. | Conditions                                         | TYP. | MAX. | Conditions      | TYP. | MAX. |
| R×5RL20A    | VIN–<br>VOUT<br>=2.0V<br><br>10μA≤<br>IOUT<br>≤10mA | 1.950 | 2.000 | 2.050 | VIN–<br>VOUT<br>=2.0V | 25                                                 | 35   | VIN–<br>VOUT<br>=2.0V<br><br>1mA≤<br>IOUT<br>≤35mA | 30   | 45   | IOUT<br>=1mA    | 60   | 90   |
| R×5RL21A    |                                                     | 2.048 | 2.100 | 2.152 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL22A    |                                                     | 2.145 | 2.200 | 2.255 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL23A    |                                                     | 2.243 | 2.300 | 2.357 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL24A    |                                                     | 2.340 | 2.400 | 2.460 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL25A    |                                                     | 2.438 | 2.500 | 2.562 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL26A    |                                                     | 2.535 | 2.600 | 2.665 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL27A    |                                                     | 2.633 | 2.700 | 2.767 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL28A    |                                                     | 2.730 | 2.800 | 2.870 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL29A    |                                                     | 2.828 | 2.900 | 2.972 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL30A    |                                                     | 2.925 | 3.000 | 3.075 |                       | 35                                                 | 50   | VIN–<br>VOUT<br>=2.0V<br><br>1mA≤<br>IOUT<br>≤50mA | 40   | 60   |                 | 40   | 60   |
| R×5RL31A    |                                                     | 3.023 | 3.100 | 3.177 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL32A    |                                                     | 3.120 | 3.200 | 3.280 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL33A    |                                                     | 3.218 | 3.300 | 3.382 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL34A    |                                                     | 3.315 | 3.400 | 3.485 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL35A    |                                                     | 3.413 | 3.500 | 3.587 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL36A    |                                                     | 3.510 | 3.600 | 3.690 |                       | 35                                                 | 50   | VIN–<br>VOUT<br>=2.0V<br><br>1mA≤<br>IOUT<br>≤50mA | 40   | 60   |                 | 35   | 53   |
| R×5RL37A    |                                                     | 3.608 | 3.700 | 3.792 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL38A    |                                                     | 3.705 | 3.800 | 3.895 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL39A    |                                                     | 3.803 | 3.900 | 3.997 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL40A    |                                                     | 3.900 | 4.000 | 4.100 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL41A    |                                                     | 3.998 | 4.100 | 4.202 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL42A    |                                                     | 4.095 | 4.200 | 4.305 |                       | 45                                                 | 65   | VIN–<br>VOUT<br>=2.0V<br><br>1mA≤<br>IOUT<br>≤65mA | 50   | 70   |                 | 30   | 45   |
| R×5RL43A    |                                                     | 4.193 | 4.300 | 4.407 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL44A    |                                                     | 4.290 | 4.400 | 4.510 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL45A    |                                                     | 4.388 | 4.500 | 4.612 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL46A    |                                                     | 4.485 | 4.600 | 4.715 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL47A    |                                                     | 4.583 | 4.700 | 4.817 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL48A    |                                                     | 4.680 | 4.800 | 4.920 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL49A    |                                                     | 4.778 | 4.900 | 5.022 |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL50A    | 4.875                                               | 5.000 | 5.125 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL51A    | 4.973                                               | 5.100 | 5.227 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL52A    | 5.070                                               | 5.200 | 5.330 | 55    | 80                    | VIN–<br>VOUT<br>=2.0V<br><br>1mA≤<br>IOUT<br>≤80mA | 60   | 90                                                 | 25   | 38   |                 |      |      |
| R×5RL53A    | 5.168                                               | 5.300 | 5.432 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL54A    | 5.265                                               | 5.400 | 5.535 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL55A    | 5.363                                               | 5.500 | 5.637 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL56A    | 5.460                                               | 5.600 | 5.740 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL57A    | 5.558                                               | 5.700 | 5.842 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL58A    | 5.655                                               | 5.800 | 5.945 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |
| R×5RL59A    | 5.753                                               | 5.900 | 6.047 |       |                       |                                                    |      |                                                    |      |      |                 |      |      |

T<sub>opt</sub>=25°C

| Quiescent Current                            |      |      | Line Regulation                                                                          |      |      | Input Voltage       | Output Voltage Tempco.                                              |      |
|----------------------------------------------|------|------|------------------------------------------------------------------------------------------|------|------|---------------------|---------------------------------------------------------------------|------|
| I <sub>ss</sub> (μA)                         |      |      | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub> (%/V)                                                |      |      | V <sub>IN</sub> (V) | ΔV <sub>OUT</sub> /ΔT(ppm/°C)                                       |      |
| Conditions                                   | TYP. | MAX. | Conditions                                                                               | TYP. | MAX. | MAX.                | Conditions                                                          | TYP. |
| V <sub>IN</sub><br>V <sub>OUT</sub><br>=2.0V | 1.0  | 3.0  | I <sub>OUT</sub><br>=1mA<br><br>V <sub>OUT</sub> +<br>0.5V≤<br>V <sub>IN</sub> ≤<br>≤10V | 0.05 | 0.2  | 10                  | I <sub>OUT</sub><br>=10mA<br><br>-30°C≤<br>T <sub>opt</sub><br>80°C | ±100 |
|                                              | 1.1  | 3.3  |                                                                                          |      |      |                     |                                                                     |      |
|                                              | 1.2  | 3.6  |                                                                                          |      |      |                     |                                                                     |      |
|                                              | 1.3  | 3.9  |                                                                                          |      |      |                     |                                                                     |      |

OPERATION

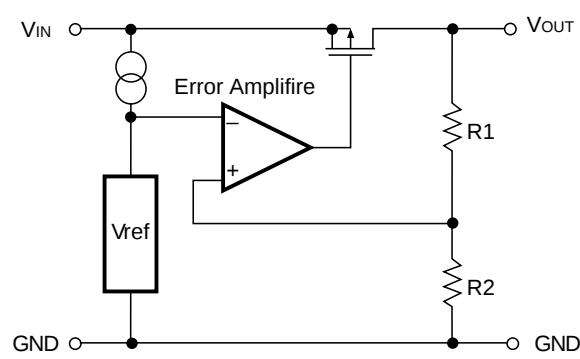


FIG. 1 Block Diagram

Output Voltage  $V_{OUT}$  divided at the node between Registers  $R1$  and  $R2$  is compared with Reference Voltage by Error Amplifier, so that a constant voltage is output.

TEST CIRCUITS

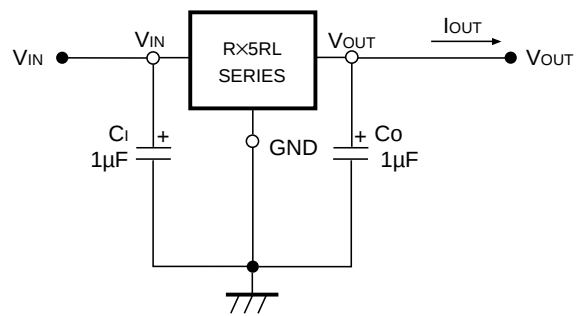


FIG. 2 Test Circuit

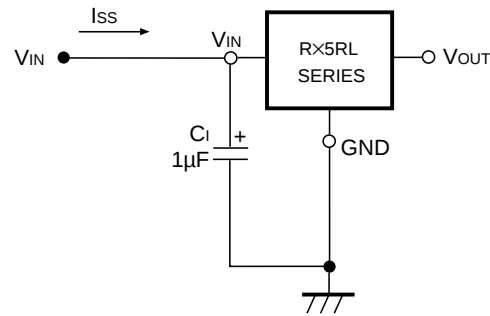


FIG. 3 Quiescent Current Test Circuit




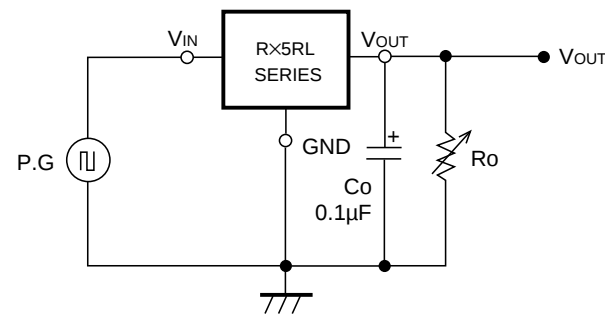




FIG. 4 Line Transient Response Test Circuit





## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current

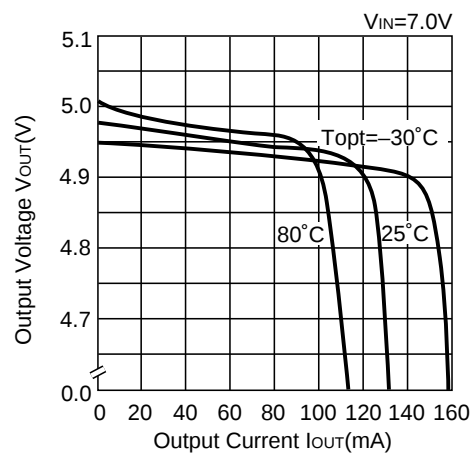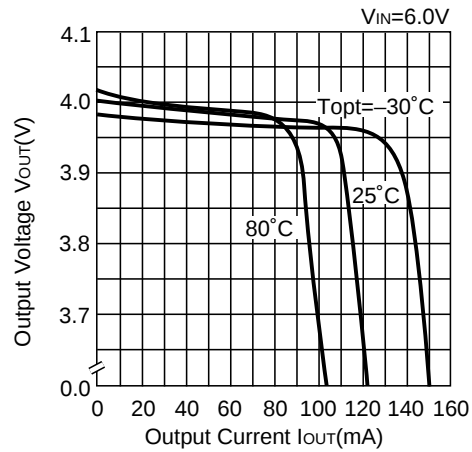
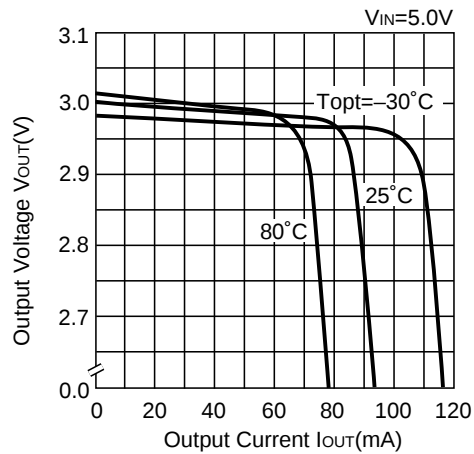



### 2) Output Voltage vs. Input Voltage

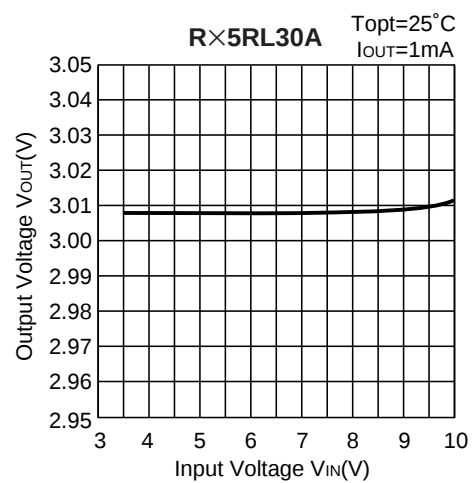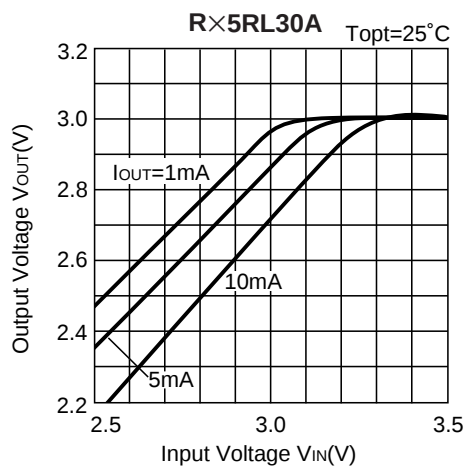

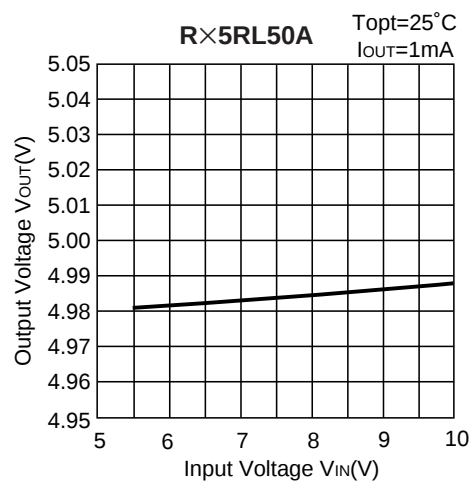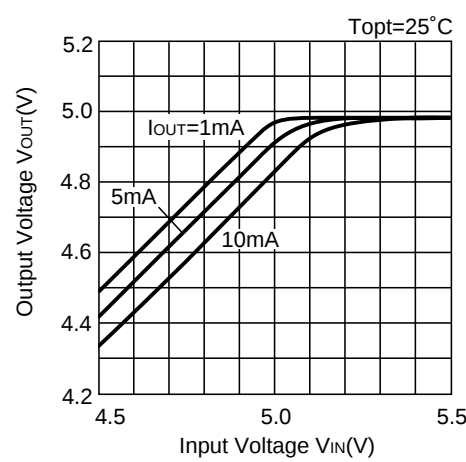
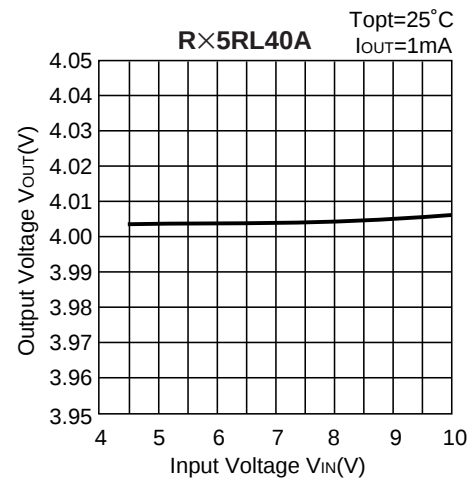
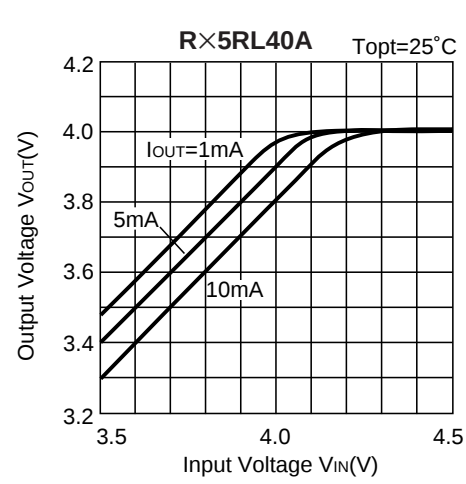


3) Dropout Voltage vs. Output Current


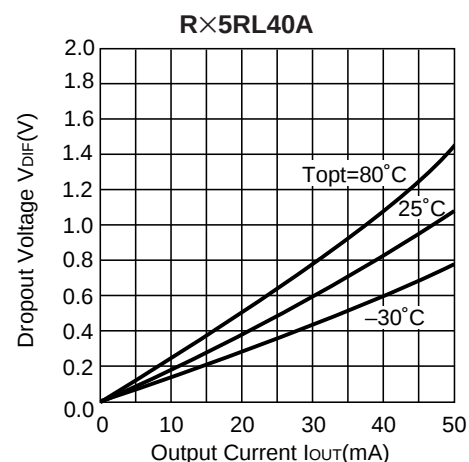
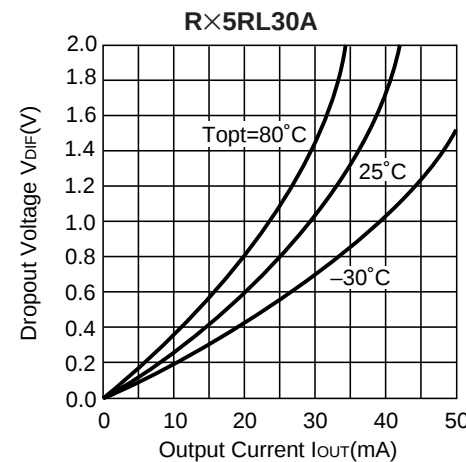


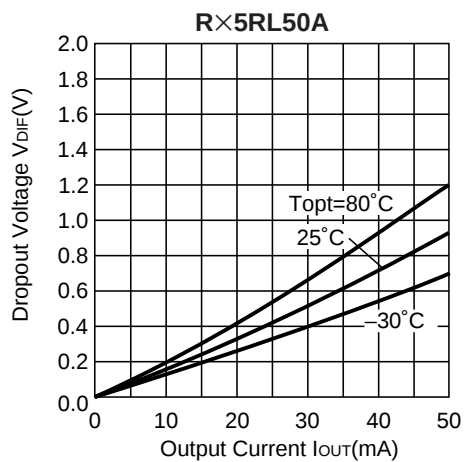



#### 4) Output Voltage vs. Temperature

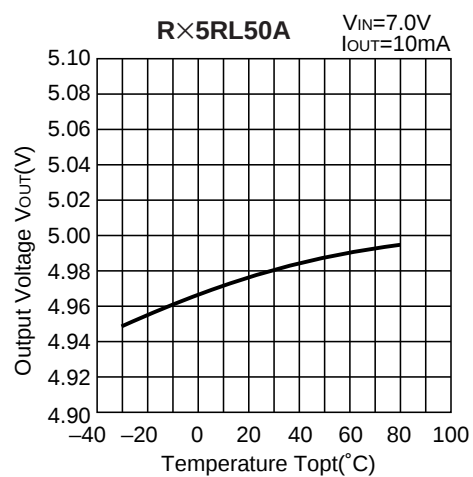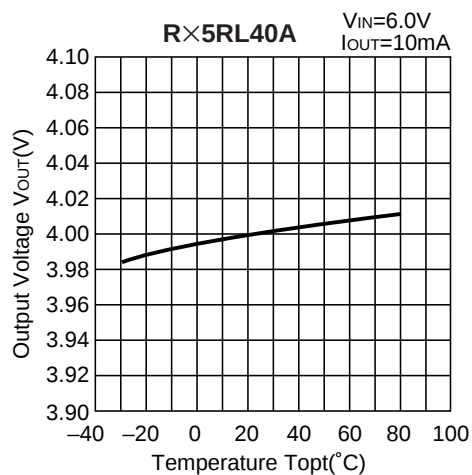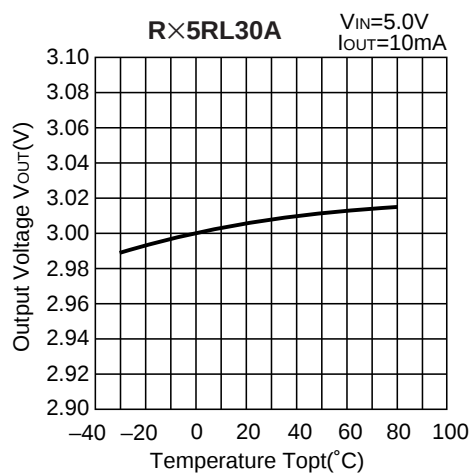


### 5) Quiescent Current vs. Input Voltage

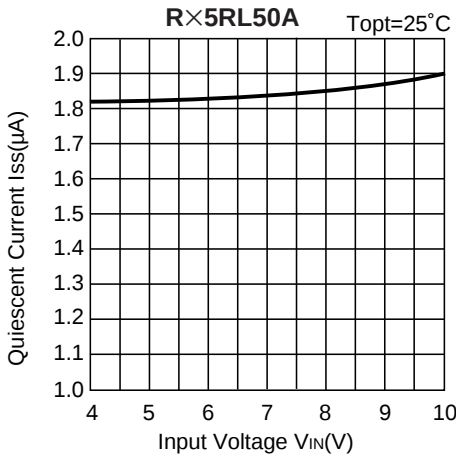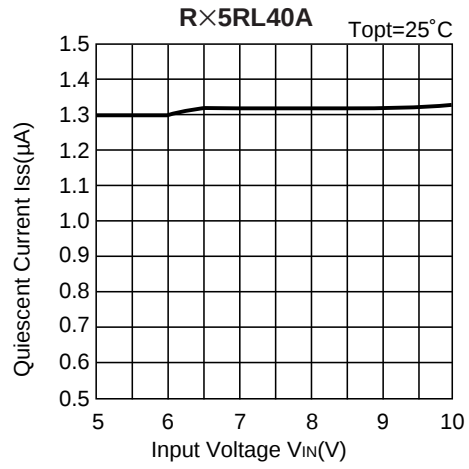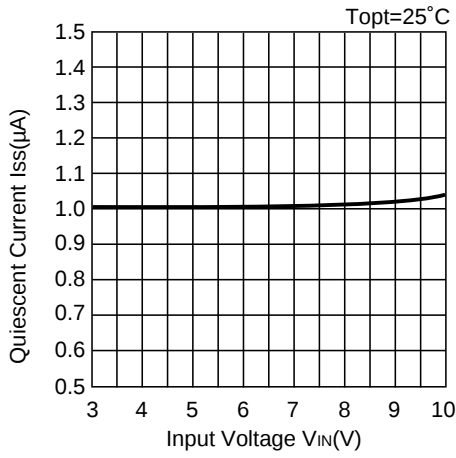


### 6) Quiescent Current vs. Temperature

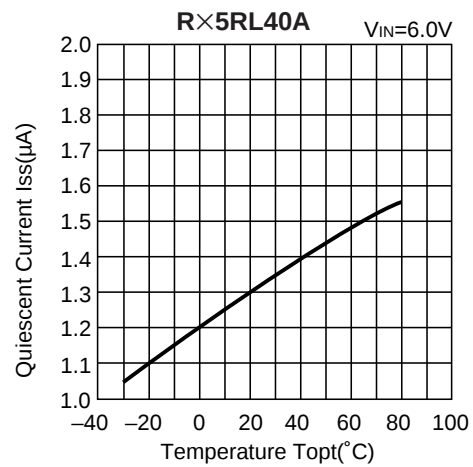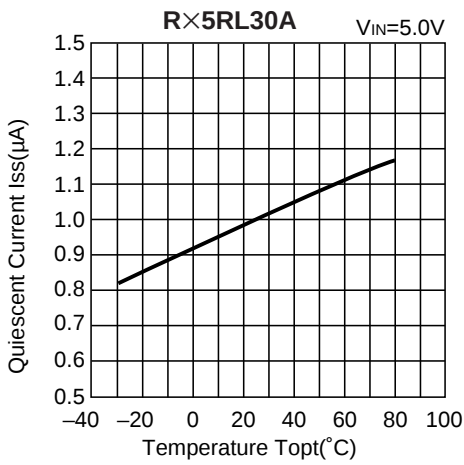


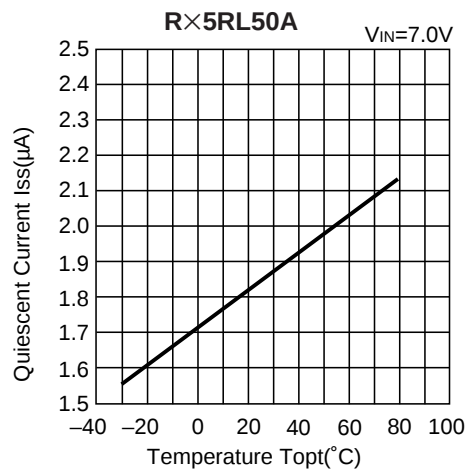


### 7) Dropout Voltage vs. Set Output Voltage

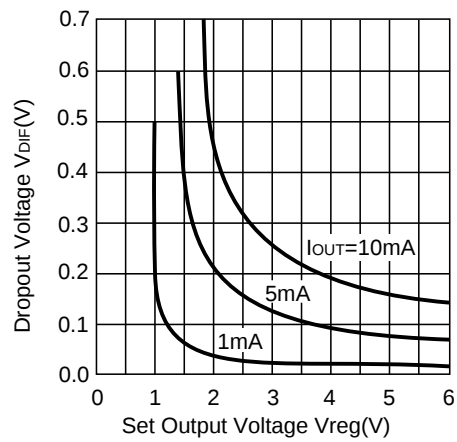


### 8) Line Transient Response (1)

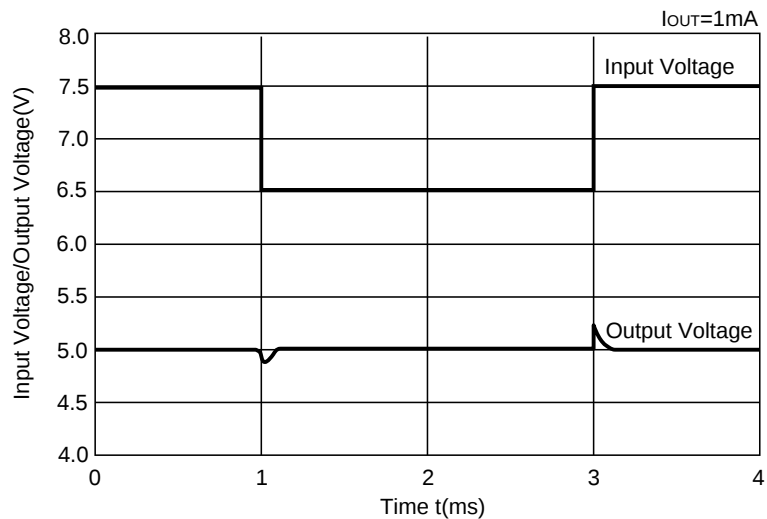

### 9) Line Transient Response (2)

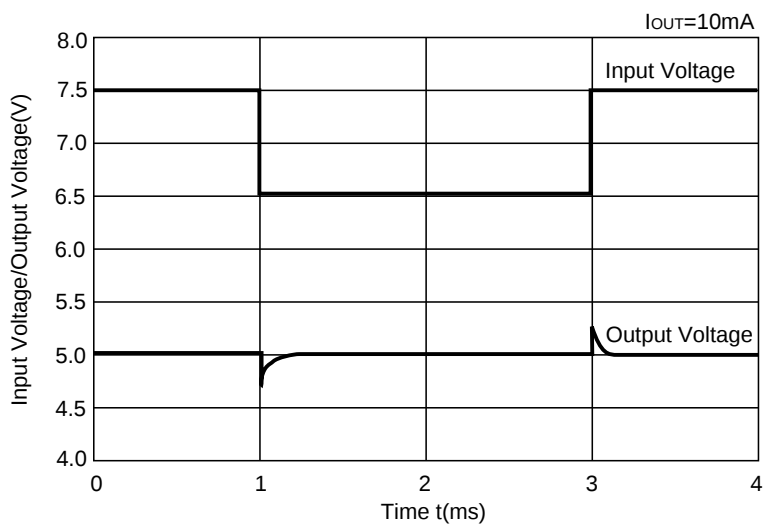

## TYPICAL APPLICATION

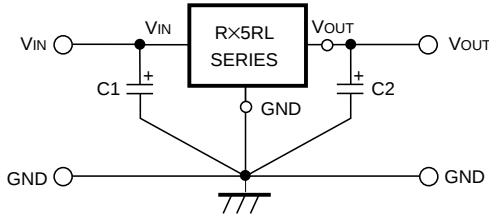


In R×5RL Series, a constant voltage can be obtained without using Capacitors C1 and C2. However, when the wire connected to Vin is long, use Capacitor C1. Output noise can be reduced by using Capacitor C2.

Insert Capacitors C1 and C2 with the capacitance of 0.1μF to 2.0μF between Input/Output Pins and GND Pin with minimum wiring.

## APPLICATION CIRCUITS

### • VOLTAGE BOOST CIRCUIT

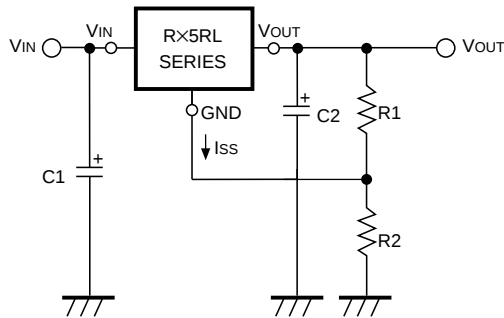


The output voltage can be obtained by the following formula :

$$V_{OUT} = V_{reg}^{*1} \cdot (1 + R_2/R_1) + I_{SS} R_2$$

Since the quiescent current of R×5RE Series is so small that the resistances of R1 and R2 can be set as large as several hundreds kΩ and therefore the supply current of “Voltage Boost Circuit” itself can be reduced.

Furthermore, since R×5RL Series are operated by a constant voltage, the supply current of “Voltage Boost Circuit” is not substantially affected by the input voltage.


### • DUAL POWER SUPPLY CIRCUIT

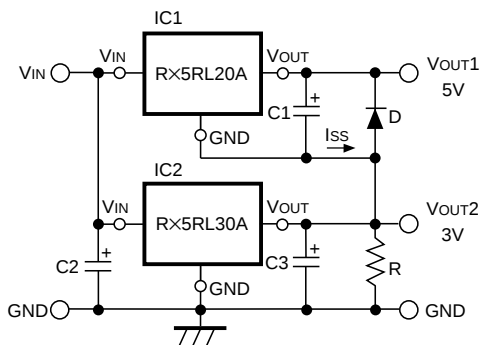

As shown in the circuit diagram, a dual power supply circuit can be constructed by using two R×5RL Series.


This circuit diagram shows a dual power supply circuit with an output of 3V and an output of 5V. When the minimum output current of IC2 is larger than ISS of IC1, Resistor R is unnecessary. Diode D is a protection diode for the case where VOUT2 becomes larger than VOUT1.

### • CURRENT BOOST CIRCUIT

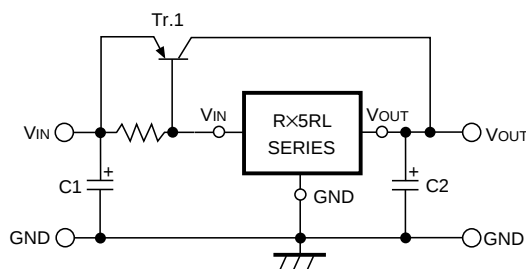

Output current of 60mA or more can be obtained by the current boost circuit constructed as shown in this circuit diagram.

### • CURRENT BOOST CIRCUIT WITH OVERCURRENT LIMIT CIRCUIT

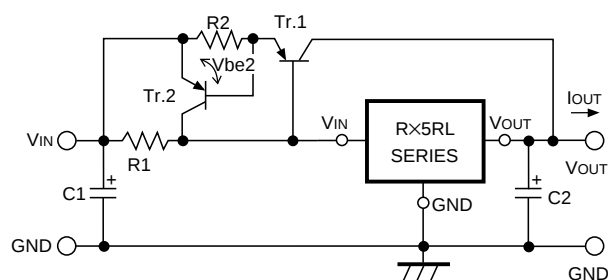


A circuit for protecting Tr.1 from the destruction caused by output short-circuit or overcurrent is shown in this circuit diagram.

When the voltage reduction caused by the current ( $I_{OUT}$ ) which flows through R2 reaches  $V_{be2}$  of Tr.2 by additionally providing the current boost circuit with Tr.2 and R2, Tr.2 is turned ON and the base current of Tr.1 is increased, so that the output current is limited.

Current limit of Overcurrent Limit Circuit is obtained as follows :

$$I_{OUT} = V_{be2}/R2$$

### • CURRENT SOURCE

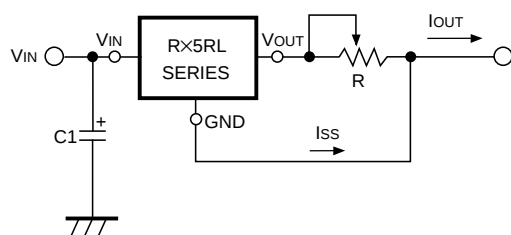

A current source with the structure as shown in this circuit diagram can be used. Output Current  $I_{OUT}$  is obtained as follows :


$$I_{OUT} = V_{reg}^{*1}/R + I_{SS}$$

Take care that Output Current  $I_{OUT}$  does not exceed its allowable current.


★1)  $V_{reg}$  : Set Output Voltage of R×5RL Series.

PACKAGE DIMENSIONS (Unit: mm)


• TO-92

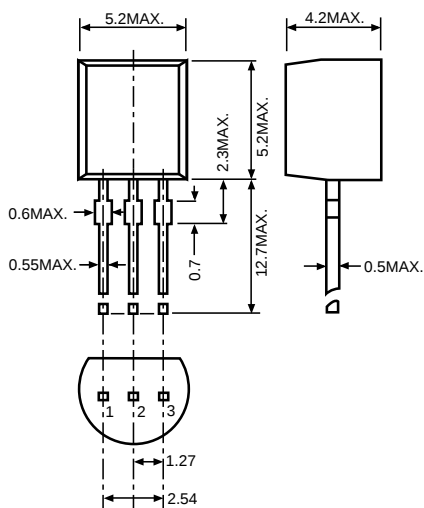

• SOT-89

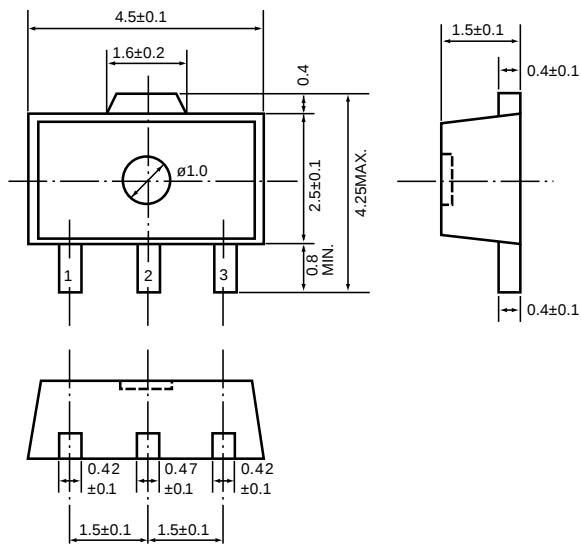

• SOT-23-5

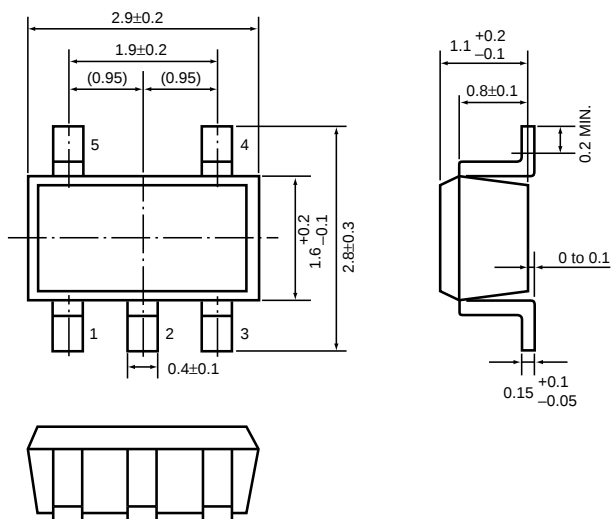





---

**RICOH COMPANY, LTD.**  
**ELECTRONIC DEVICES DIVISION**

**HEADQUARTERS**

13-1, Himemuro-cho, Ikeda City, Osaka 563-8501, JAPAN  
Phone 81-727-53-1111 Fax 81-727-53-6011

**YOKOHAMA OFFICE** (International Sales)

3-2-3, Shin-Yokohama, Kohoku-ku, Yokohama City, Kanagawa 222-8530,  
JAPAN  
Phone 81-45-477-1697 Fax 81-45-477-1694 · 1695  
<http://www.ricoh.co.jp/LSI/english/>

**RICOH CORPORATION**  
**ELECTRONIC DEVICES DIVISION**

**SAN JOSE OFFICE**

3001 Orchard Parkway, San Jose, CA 95134-2088, U.S.A.  
Phone 1-408-432-8800 Fax 1-408-432-8375