

FEATURES

- *Guaranteed* $25\mu\text{V}$ max. Offset Voltage
- *Guaranteed* $0.6\mu\text{V}/^\circ\text{C}$ max. Offset Voltage Drift with Temperature
- *Excellent* $1.0\mu\text{V}/\text{Month}$ max. Long Term Stability
- *Guaranteed* $0.6\mu\text{V}_{\text{p-p}}$ max. Noise
- *Guaranteed* 2.0nA max. Input Bias Current


APPLICATIONS

- Thermocouple Amplifiers
- Strain Gauge Amplifiers
- Low Level Signal Processing
- Medical Instrumentation

DESCRIPTION


The OP-07 offers excellent performance in applications requiring low offset voltage, low drift with time and temperature and very low noise. Linear's OP-07 is interchangeable with many of the precision op-amp device types. The OP-07 also offers a wide input voltage range, high common mode rejection and low input bias current. These features result in optimum performance for small signal level and low frequency applications. Use of advanced design, processing and testing techniques make Linear's OP-07 a superior choice over similar products. A buffered reference application is shown below. For single op amp applications requiring higher performance, see the LT1001 and for matched dual precision applications see the LT1002.

Precision Buffered Single Supply Reference

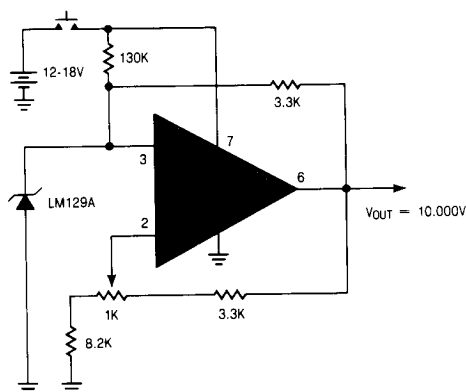

The OP-07 contributes less than 5% of the total drift with temperature, noise and long term drift of the reference application.



**Offset Voltage Drift With Temperature
Of Representative Units**

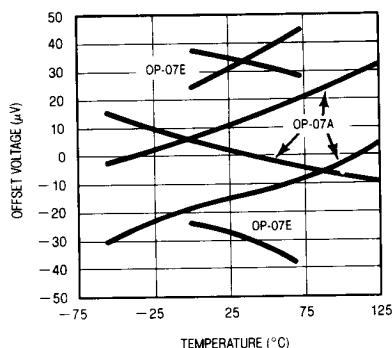

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	$\pm 22V$
Differential Input Voltage	$\pm 30V$
Input Voltage Equal to Supply Voltage	
Output Short Circuit Duration	Indefinite
Operating Temperature Range	
OP-07/OP-07A	$-55^{\circ}C$ to $125^{\circ}C$
OP-07E/OP-07C	$0^{\circ}C$ to $70^{\circ}C$
Storage Temperature Range	
All Devices	$-65^{\circ}C$ to $150^{\circ}C$
Lead Temperature (Soldering, 10 sec.)	$300^{\circ}C$

PACKAGE/ORDER INFORMATION

	ORDER PART NO.	OFFSET VOLTAGE (MAX)
	OP-07AH OP-07H OP-07EH OP-07CH	$25\mu V$ $75\mu V$ $75\mu V$ $150\mu V$
	OP-07AJ8 OP-07J8 OP-07EJ8 OP-07CJ8 OP-07EN8 OP-07CN8	$25\mu V$ $75\mu V$ $75\mu V$ $150\mu V$ $75\mu V$ $150\mu V$

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $T_A = 25^{\circ}C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	OP-07A TYP	MAX	MIN	OP-07 TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 1)		10	25		30	75	μV
$\frac{\Delta V_{OS}}{\Delta \text{Time}}$	Long Term Input Offset Voltage Stability	(Notes 2 and 3)		0.2	1.0		0.2	1.0	$\mu V/\text{Month}$
I_{OS}	Input Offset Current			0.3	2.0		0.4	2.8	nA
I_B	Input Bias Current			± 0.7	± 2.0		± 1.0	± 3.0	nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 2)		0.35	0.6		0.35	0.6	μV_{P-P}
	Input Noise Voltage Density	$f_o = 10\text{Hz}$ $f_o = 100\text{Hz}$ (Note 2) $f_o = 1000\text{Hz}$		10.3 10.0 9.6	18.0 13.0 11.0		10.3 10.0 9.6	18.0 13.0 11.0	$nV/\sqrt{\text{Hz}}$
i_n	Input Noise Current	0.1Hz to 10Hz (Note 2)		14	30		14	30	pA_{P-P}
	Input Noise Current Density	$f_o = 10\text{Hz}$ $f_o = 100\text{Hz}$ (Note 2) $f_o = 1000\text{Hz}$		0.32 0.14 0.12	0.80 0.23 0.17		0.32 0.14 0.12	0.80 0.23 0.17	$pA/\sqrt{\text{Hz}}$
R_{in}	Input Resistance Differential Mode	(Note 4)	30	80		20	60		$M\Omega$
	Input Resistance Common Mode			200			200		$G\Omega$
	Input Voltage Range		± 13.5	± 14.0		± 13.5	± 14.0		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	110	126		110	126		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	100	108		100	108		dB
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_O = \pm 10V$ $R_L \geq 500\Omega$, $V_O = \pm 0.5V$ $V_S = \pm 3V$ (Note 4)	300 150	500 400		200 150	500 400		V/mV
V_{OUT}	Maximum Output Voltage Swing	$R_L \geq 10k\Omega$ $R_L \geq 2k\Omega$ $R_L \geq 1k\Omega$	± 12.5 ± 12.0 ± 10.5	± 13.0 ± 12.8 ± 12.0		± 12.5 ± 12.0 ± 10.5	± 13.0 ± 12.8 ± 12.0		V
SR	Slew Rate	$R_L \geq 2k\Omega$ (Note 4)	0.1	0.25		0.1	0.25		V/ μS
GBW	Closed Loop Bandwidth	$A_{VCL} = +1$ (Note 4)	0.4	0.6		0.4	0.6		MHz
Z_o	Open Loop Output Impedance	$V_O = 0$, $I_O = 0$, $f = 10\text{Hz}$		60			60		Ω
P_d	Power Dissipation	$V_S = \pm 15V$ $V_S = \pm 3V$		75 4	120 6		75 4	120 6	mW
	Offset Adjustment Range	Null Pot = $20k\Omega$		± 4			± 4		mV

See Notes on page 2-210.

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $-55^\circ C \leq T_A \leq 125^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	OP-07A TYP	MAX	MIN	OP-07 TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 1)	●	25	60	60	200		μV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Voltage Drift Without External Trim With External Trim	Null Pot = 20k Ω (Note 2)	●	0.2 0.2	0.6 0.6	0.3 0.3	1.3 1.3		$\mu V/^\circ C$
I_{OS}	Input Offset Current		●	0.8	4.0	1.2	5.6		nA
$\frac{\Delta I_{OS}}{\Delta Temp}$	Average Input Offset Current Drift	(Note 2)	●	5	25	8	50		$pA/^\circ C$
I_B	Input Bias Current		●	± 1.0	± 4.0	± 2.0	± 6.0		nA
$\frac{\Delta I_B}{\Delta Temp}$	Average Input Bias Current Drift	(Note 2)	●	8	25	13	50		$pA/^\circ C$
	Input Voltage Range		●	± 13.0	± 13.5	± 13.0	± 13.5		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	●	106	123	106	123		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	●	94	106	94	106		dB
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	●	200	400	150	400		V/mV
V_{OUT}	Output Voltage Swing	$R_L \geq 2k\Omega$	●	± 12.0	± 12.6	± 12.0	± 12.6		V

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	OP-07E TYP	MAX	MIN	OP-07C TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 1)		30	75	60	150		μV
$\frac{\Delta V_{OS}}{\Delta Time}$	Long Term Input Offset Voltage Stability	(Notes 2 and 3)		0.3	1.5	0.4	2.0		$\mu V/Month$
I_{OS}	Input Offset Current			0.5	3.8	0.8	6.0		nA
I_B	Input Bias Current			± 1.2	± 4.0	± 1.8	± 7.0		nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 2)		0.35	0.6	0.35	0.65		μV_{p-p}
	Input Noise Voltage Density	$f_o = 10Hz$ $f_o = 100Hz$ $f_o = 1000Hz$ (Note 2)		10.3 10.0 9.6	18.0 13.0 11.0	10.5 10.2 9.8	20.0 13.5 11.5		$nV/\sqrt{Hz}$
i_n	Input Noise Current	0.1Hz to 10Hz (Note 2)		14	30	15	35		pA_{p-p}
	Input Noise Current Density	$f_o = 10Hz$ $f_o = 100Hz$ $f_o = 1000Hz$ (Note 2)		0.32 0.14 0.12	0.80 0.23 0.17	0.32 0.15 0.13	0.90 0.27 0.18		$pA/\sqrt{Hz}$
R_{in}	Input Resistance Differential Mode	(Note 4)	15	50		8	33		M Ω
	Input Resistance Common Mode			160			120		G Ω
	Input Voltage Range		± 13.5	± 14.0		± 13.0	± 14.0		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	106	123		100	120		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	94	106		90	104		dB
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_O = \pm 10V$ $R_L \geq 500\Omega$, $V_O = \pm 0.5V$ $V_S = \pm 3V$ (Note 4)	200 150	500 400		120 100	400 400		V/mV
V_O	Maximum Output Voltage Swing	$R_L \geq 10k\Omega$ $R_L \geq 2k\Omega$ $R_L \geq 1k\Omega$	± 12.5 ± 12.0 ± 10.5	± 13.0 ± 12.8 ± 12.0		± 12.5 ± 11.5 ± 12.0	± 13.0 ± 12.8 ± 12.0		V
SR	Slewing Rate	$R_L \geq 2k\Omega$ (Note 2)	0.1	0.25		0.1	0.25		V/ μS
GBW	Closed Loop Bandwidth	$A_{VCL} = +1$ (Note 2)	0.4	0.6		0.4	0.6		MHz
Z_o	Open Loop Output Impedance	$V_O = 0$, $I_O = 0$, $f = 10Hz$		60			60		Ω
P_d	Power Dissipation	$V_S = \pm 15V$ $V_S = \pm 3V$		75 4	120 6		80 4	150 8	mW mW
	Offset Adjustment Range	Null Pot = 20k Ω		± 4			± 4		mV

See Notes on page 2-210.



ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $0^\circ C \leq T_A \leq 70^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		OP-07E			OP-07C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage		●		45	130		85	250	μV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Voltage Drift Without External Trim With External Trim	Null Pot = 20k Ω (Note 2)	●		0.3 0.3	1.3 1.3		0.5 0.4	1.8 1.6	$\mu V/^\circ C$
I_{OS}	Input Offset Current		●		0.9	5.3		1.6	8.0	nA
$\frac{\Delta I_{OS}}{\Delta Temp}$	Average Input Offset Current Drift	(Note 2)	●		8	35		12	50	pA/ $^\circ C$
I_B	Input Bias Current		●		± 1.5	± 5.5		± 2.2	± 9.0	nA
$\frac{\Delta I_B}{\Delta Temp}$	Average Input Bias Current Drift	(Note 2)	●		13	35		18	50	pA/ $^\circ C$
	Input Voltage Range		●	± 13.0	± 13.5		± 13.0	± 13.5		V
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13V$	●	103	123		97	120		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 3V$ to $\pm 18V$	●	90	104		86	100		dB
A_{VOL}	Large Signal Voltage Gain	$R_L \geq 2k\Omega$, $V_O = \pm 10V$	●	180	450		100	400		V/mV
V_{OUT}	Output Voltage Swing	$R_L \geq 2k\Omega$	●	± 12.0	± 12.6		± 11.0	± 12.6		V

The ● denotes the specifications which apply over full operating temperature range.

For MIL-STD components, please refer to LTC 883C data sheet for test listing and parameters.

Note 1: Offset voltage for the OP-07A is measured 60 seconds after power is applied. All other grades are measured with high speed test equipment, approximately 1 second after power is applied.

Note 2: This parameter is tested on a sample basis only.


Note 3: Long term Input Offset Voltage Stability refers to the averaged trend line of V_{OS} versus Time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V_{OS} during the first 30 operating days are typically 2.5 μV .

Note 4: This parameter is guaranteed by design.


Note 5: The OP-07D is available by special request.

TYPICAL PERFORMANCE CHARACTERISTICS


Low Frequency Noise
(Closed Loop Gain = 25,000)

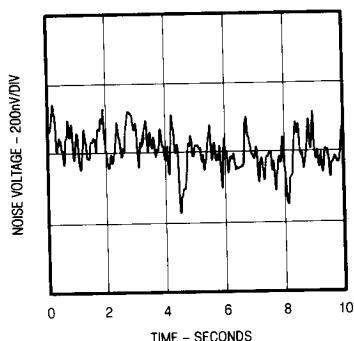


Total Input Noise Voltage vs Frequency

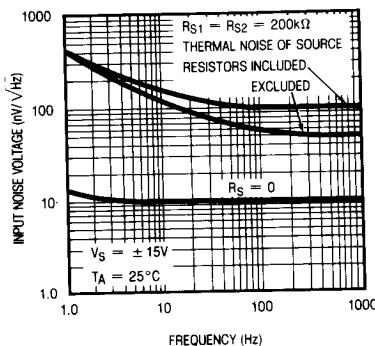


Open-Loop Frequency Response

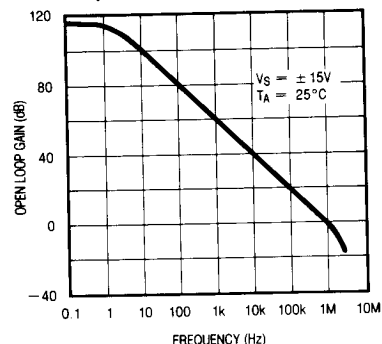


Common Mode Rejection Ratio vs Frequency

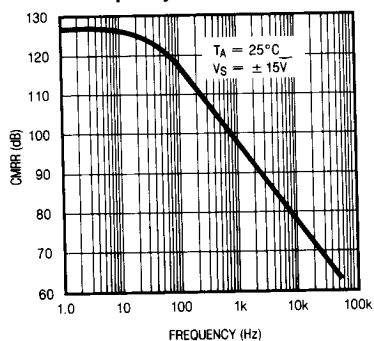


Power Supply Rejection Ratio vs Frequency

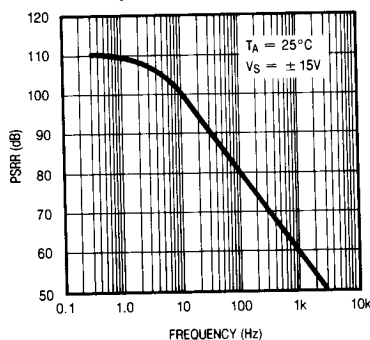


Long Term Stability of Four Representative Units

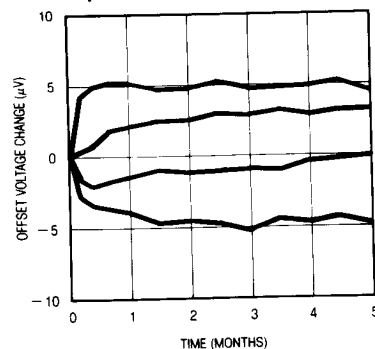


Warm-Up Drift

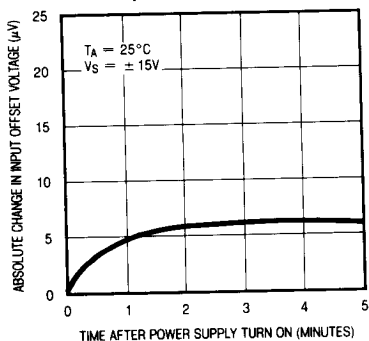

Offset Voltage Change Due to Thermal Shock

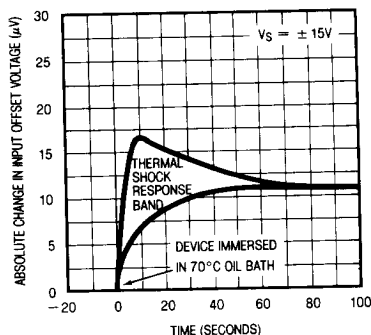


Open-Loop Gain vs Temperature

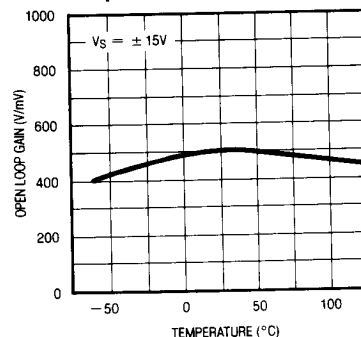


TYPICAL PERFORMANCE CHARACTERISTICS


Input Bias Current vs Temperature

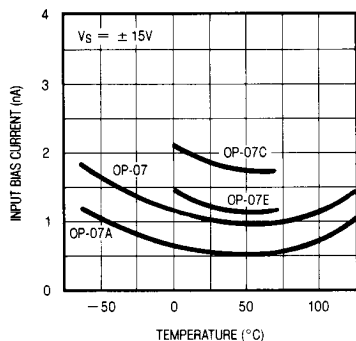


Input Offset Current vs Temperature

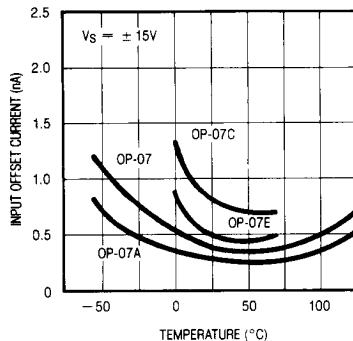


Input Bias Current vs Differential Input Voltage

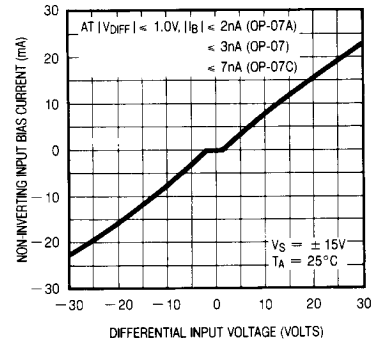


Maximum Error vs Source Resistance

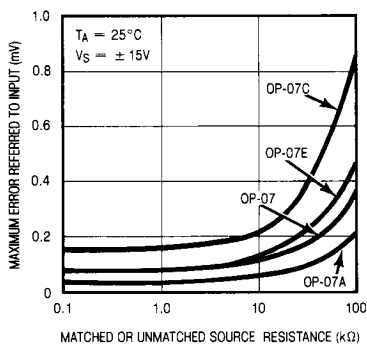


Maximum Error vs Source Resistance

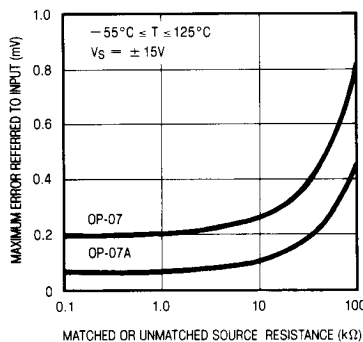


Maximum Error vs Source Resistance

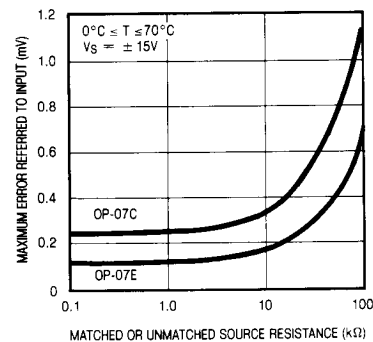


Output Voltage vs Load Resistance

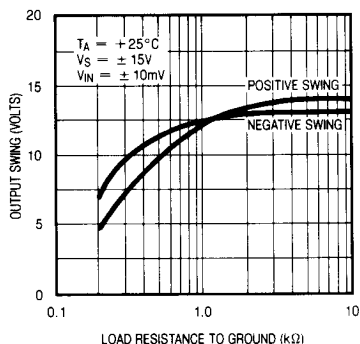

Power Consumption vs Power Supply

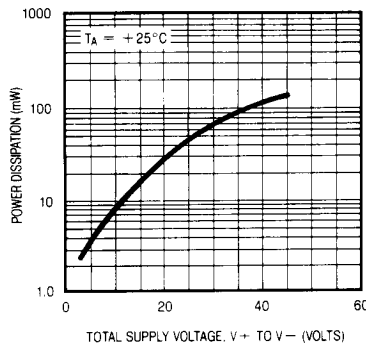


Output Short-Circuit Current vs Time

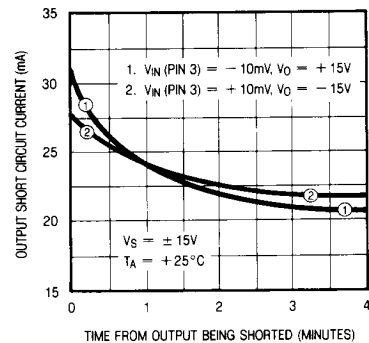


TYPICAL APPLICATIONS

Precision Summing Amplifier

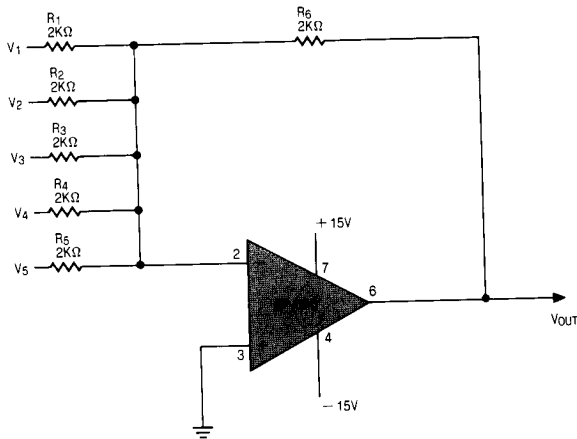

Instrumentation Amplifier

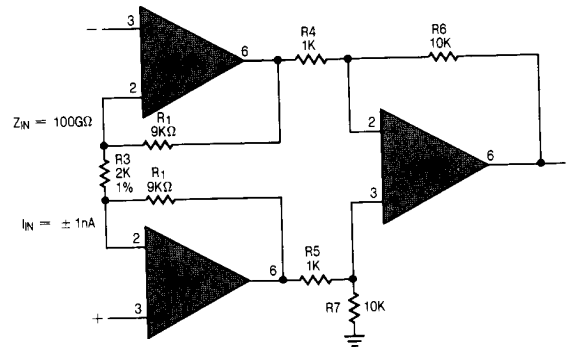


$$A_V = \frac{R_6}{R_4} \left(\frac{2R_1}{R_3} + 1 \right)$$

$$A_V = 100$$

TEST CIRCUIT DIAGRAMS


Offset Voltage Test Circuit †

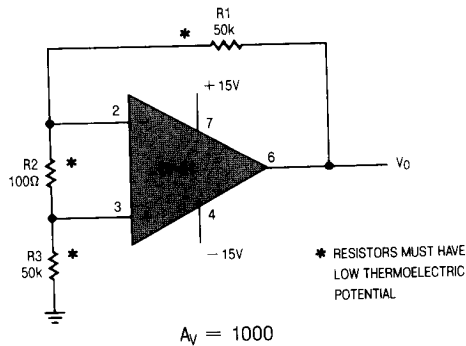

$$A_V = 1000$$

† This circuit is also used as the burn-in configuration with supply voltages changed to $\pm 20V$, $R_1 = R_3 = 10k$, $R_2 = 200\Omega$, $A_V = 100$.

Offset Nulling and Low Frequency Noise Test Circuit

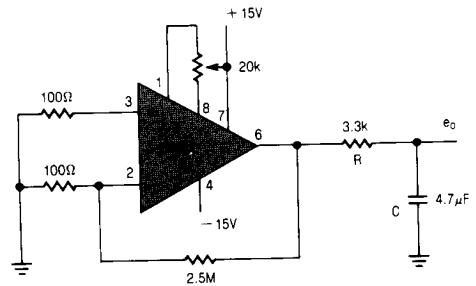

NOTES:


- 1) RC APPROXIMATELY 10Hz FILTER
- 2) OBSERVE OUTPUT FOR 10 SECONDS

$$A_V = 25000$$

Application Tip:


When the OP-07 is used as a replacement in 725, 108/108A, 308/308A applications, removal of external compensation is optional. For conventionally nulled 741 type applications, external trimming should be removed. Care should be taken to avoid thermocouple voltages caused by temperature variations between the input terminals or dissimilar metals.

SCHEMATIC DIAGRAM

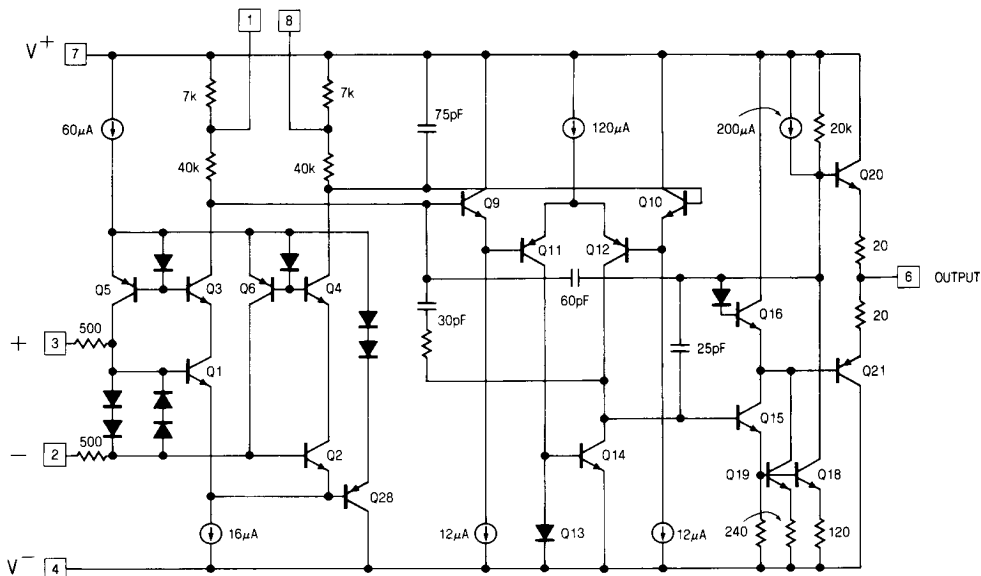

PACKAGE DESCRIPTION


**H Package
Metal Can**

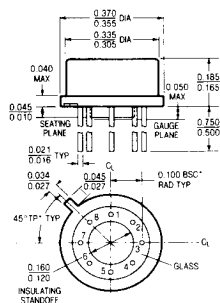

NOTE: DIMENSIONS IN INCHES

T_{jmax} 150°C	Θ_{ja} 150°C/W	Θ_{jc} 45°C/W
---------------------	--------------------------	-------------------------


J8 Package
8 Lead Hermetic Dip

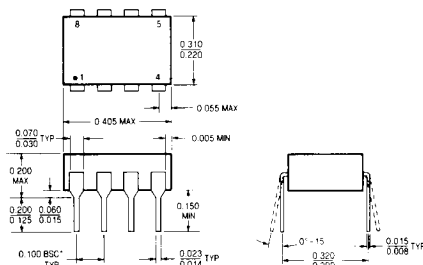

NOTE: DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED
*LEADS WITHIN 0.007 OF TRUE POSITION (TP) AT GAUGE PLANE

T_{jmax} 150°C	Θ_{ja} 100°C/W
---------------------	--------------------------

**N8 Package
8 Lead Plastic**

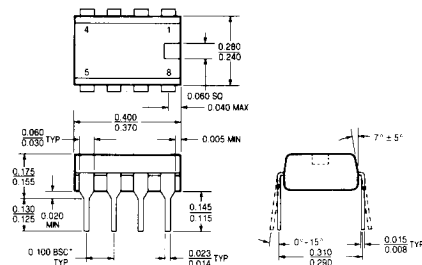

NOTE: DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED
*LEADS WITHIN 0.007 OF TRUE POSITION (TP) AT GAUGE PLANE

T_j max	Θ_{ja}
100°C	130°C/W