

## **Technical Data Sheet**

# 0603 Package Chip LED (0.2mm Height)

#### 19-219/B6C-ZN1P2TY/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- The maximum height is 0.25mm.
- The component weight is approximately 0.68 mg

### **Descriptions**

- The 19-219 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**


Dont No	Chip	E:44 ad Calan	Lens Color	
Part No.	Material	Emitted Color		
19-219/B6C-ZN1P2TY/3T	InGaN	Blue	Water Clear	





Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 1 of 9

# **Package Outline Dimensions**







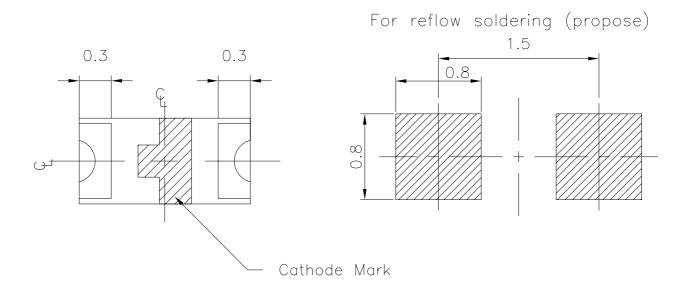

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE- 199-B01

http://www.everlight.com

Prepared date: 29-Nov-2006

Rev.1

Page: 2 of 9

Prepared by: Jay Chou



## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	IF	10	mA
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	30	mA
Power Dissipation	Pd	40	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	-40 <b>~</b> +90	$^{\circ}\! \mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for Hand Soldering: 350 °C for 3	

# Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		72	mcd	
Viewing Angle	2 \theta 1/2		120		deg	
Peak Wavelength	λр		468		nm	
Dominant Wavelength	λd	465		475	nm	IF=5mA
Spectrum Radiation Bandwidth	Δλ		35		nm	
Forward Voltage	VF	2.60		3.0	V	
Reverse Current	IR			50	$\mu$ A	VR=5V

#### **Notes:**

- 1. Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 9



## Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
Z	X	465	470		T 6 A
	Y	470	475	nm	IF=5mA

#### **Bin Range Of Luminous Intensity**

		<u> </u>				
Bin	Min	Max	Unit	Condition		
N1	28.5	36.0				
N2	36.0	45.0	,			
P1	45.0	57.0	mcd	IF=5mA		
P2	57.0	72.0				

### **Bin Range Of Forward Voltage**

Group	Bin	Min	Max	Unit	Condition	
Т	28	2.60	2.70			
	29	2.70	2.80	V	I <sub>F</sub> =5mA	
	30	2.80	2.90			
	31	2.90	3.00			

#### **Notes:**


1.Tolerance of Luminous Intensity ±10%


2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.05V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 9


# **Typical Electro-Optical Characteristics Curves**















Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 5 of 9

## Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

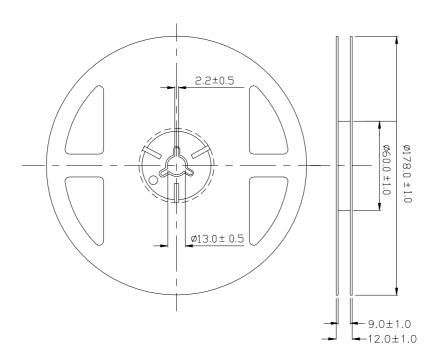

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 6 of 9



## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 5 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 7 of 9


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

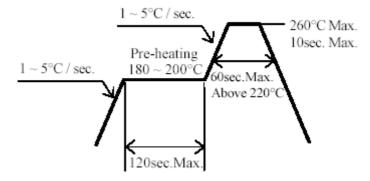

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 8 of 9




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

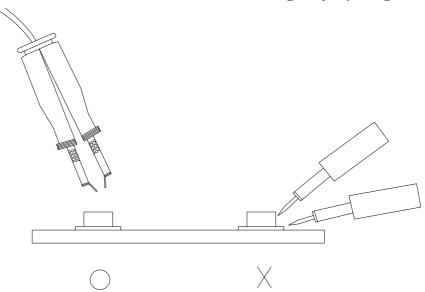

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 9 of 9