

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

ER Platforms - ER9.5, ER11 and ER14.5



-  Transformers and Inductors
-  Power: 1W to 9W
-  Three Different SMT Platforms
-  Custom designs available

Electrical Specifications @ 25°C — Operating Temperature -40°C to 125°C

TRANSFORMERS											
Part ^{3,4} Number	Application ²	Turns Ratio			Primary Secondary Isolation	Primary Inductance (μH MIN)	Leakage Inductance (μH MAX)	DCR (mΩ MAX)			
		Pri.	Sec.	Pri. Aux.				Pri.	Pri. Aux.	Sec. A	Sec. B
ER9.5 - 8 Pin SMT - (12.1mm x 10.7mm x 6.6mm MAX)											
PB2090	2.4W Flyback Transformer Vin=36-72v, Freq.=200kHz Vout=12v/0.2A, 12v/.05mA	1	0.33	0.330	1500Vdc Operational	132 @ 0.41A	5	700	820	185	N/A
PB2109	1.25W Flyback Transformer Vin=18-36v, Freq.=200kHz Vout=5v/0.25A, 12v/50mA	1	0.714	0.287	1500Vdc Operational	62 @ 0.52A	3	350	650	50	N/A
PB2110	2.4W Flyback Transformer Vin=18-36v, Freq.=200kHz Vout=12v/0.2A, 12v/50mA	1	0.68	0.680	1500Vdc Operational	32 @ 0.8A	2	180	820	185	N/A
PB2135	.5W Flyback Transformer Vin=20-30v, Freq.=200kHz Vout=±5v/50mA	1	0.42 0.42	N/A	1000Vac Operational	814 @ 0.8A	11	5772	N/A	364	364
PA0663	2.6W Flyback Transformer Vin=4.5-5.5v, Freq.=200kHz Vout=±5v/0.5A, 6v/0.02mA	1	1.11 (5v) 1.33 (6v)	N/A	1500Vdc Operational	4.6	0.15	100	N/A	97	73
ER11 - 10 Pin SMT - (12.7mm x 11.4mm x 6.6mm MAX)											
PA1032	5W Flyback Transformer Vin=30-57v, Freq.=250kHz Vout=3.3v/1.5A, 10v/15mA	1	0.166	0.500	1500Vdc Operational	46.6	1.65	380	250	15	N/A
PB2162	6W Flyback Transformer Vin=18-36v, Freq.=200kHz Vout=±12v/0.25A, 12v/20mA	1	0.393	0.393	500Vdc Operational	85 @ 0.8A	2.5	490	1100	298	298
ER14.5 - 10 Pin SMT - (16.5mm x 15.5mm x 7.6mm MAX)											
PA1006	7.5W Flyback Transformer Vin=36-65v, Freq.=250kHz Vout=5.0v/1.5A, 15v/30mA	1	0.154	0.462	1500Vdc Operational	152	5	670	750	21	N/A
PA1026	7.5W Flyback Transformer Vin=36-65v, Freq.=250kHz Vout=3.3v/2.25A, 16v/30mA	1	0.115	0.500	1500Vdc Operational	152	5	670	830	10	N/A
PA1085	8.5W Flyback Transformer Vin=36-65v, Freq.=250kHz Vout=3.3v/2.57A, 8v/20mA	1	0.115	0.269	1500Vdc Operational	152	5	670	450	10	N/A

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

ER Platforms - ER9.5, ER11 and ER14.5




NOTES :


1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. Add 'T' suffix to the part number for Tape & Reel version (ie: PA1032T).
4. RoHS compliant parts are being introduced. Please contact Pulse for RoHS compliant part availability. If available, order part by adding the suffix "NL" to the part number (i.e. PA1032 becomes PA1032NL and PA1032T becomes PA1032NLT).

Mechanical

ER9.5

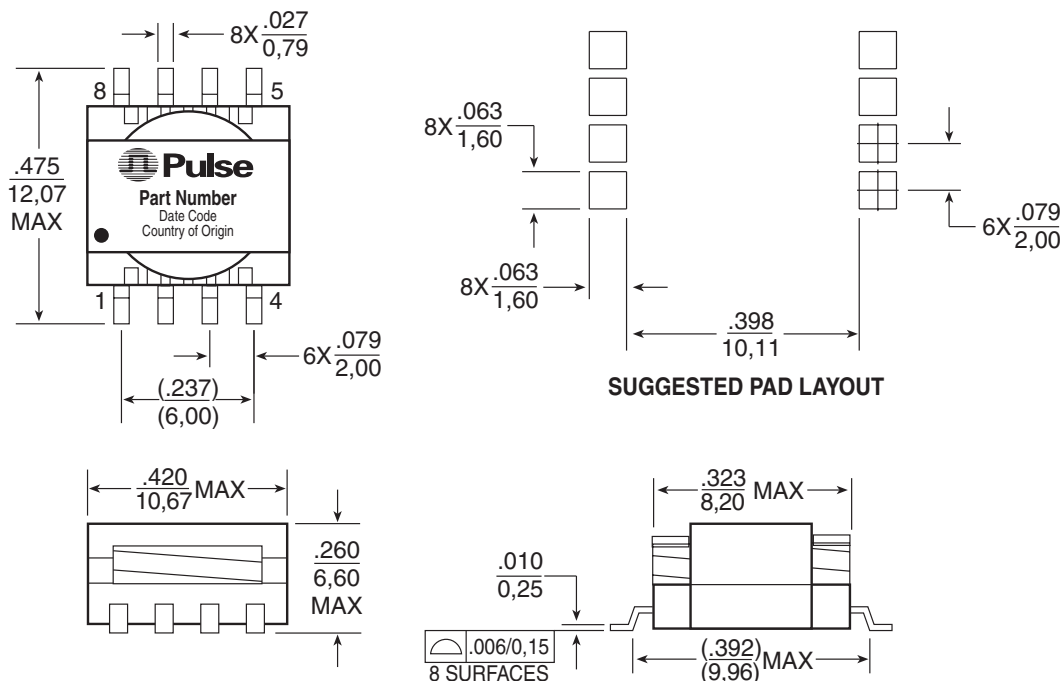

ER11

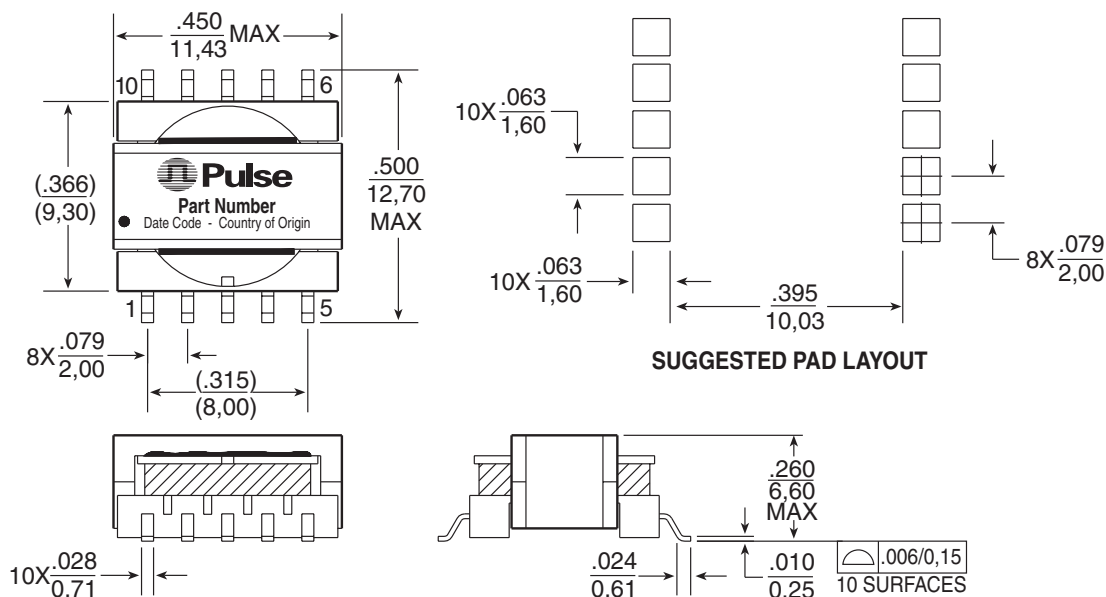


HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS

ER Platforms - ER9.5, ER11 and ER14.5








Mechanical

ER14.5

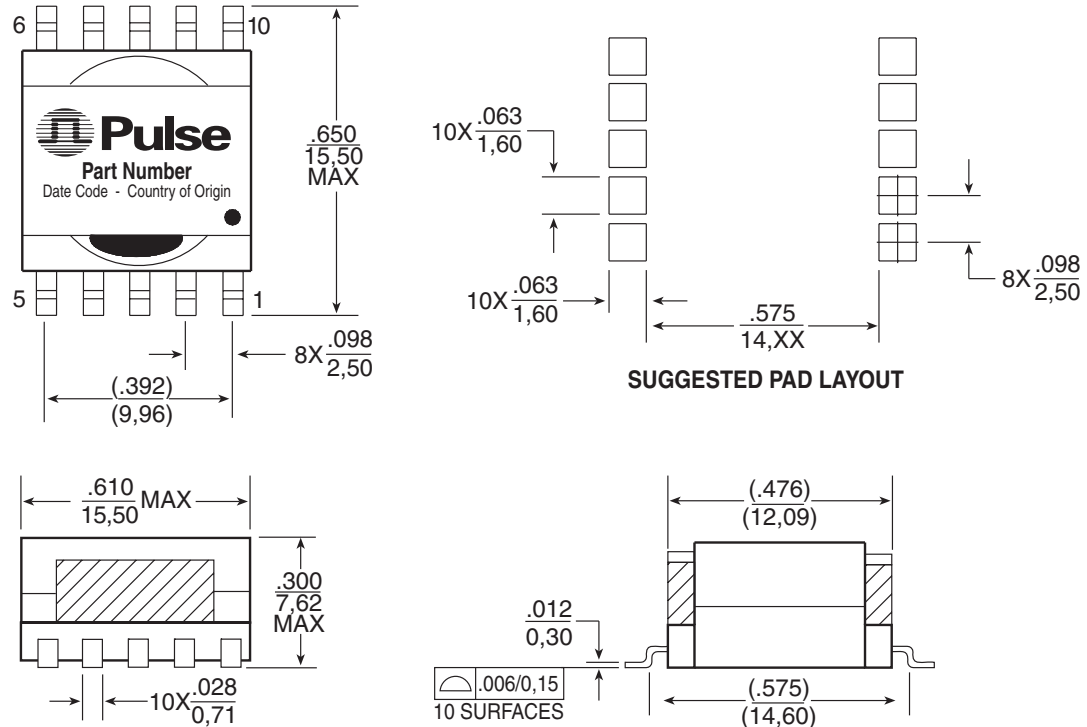

Schematics

ER9.5

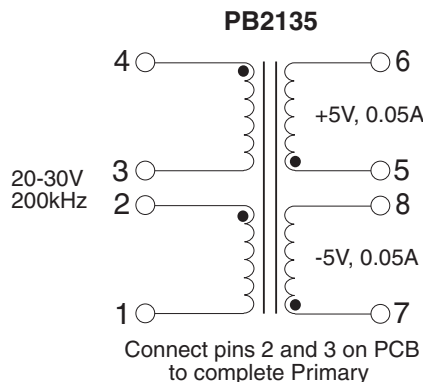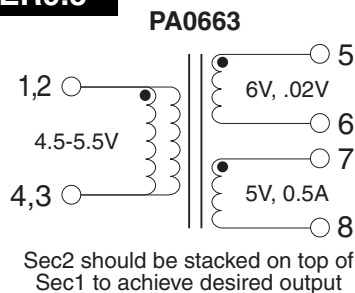

HIGH FREQUENCY CONVENTIONAL WOUND MAGNETICS


ER Platforms - ER9.5, ER11 and ER14.5




Pulse®
A TECHNITROL COMPANY

Schematics

ER11

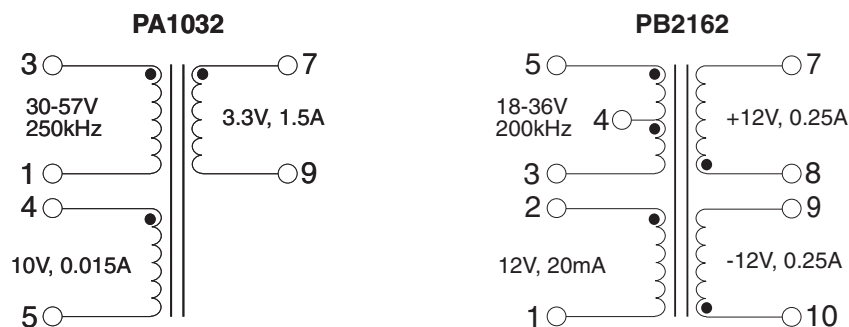

ER14.5

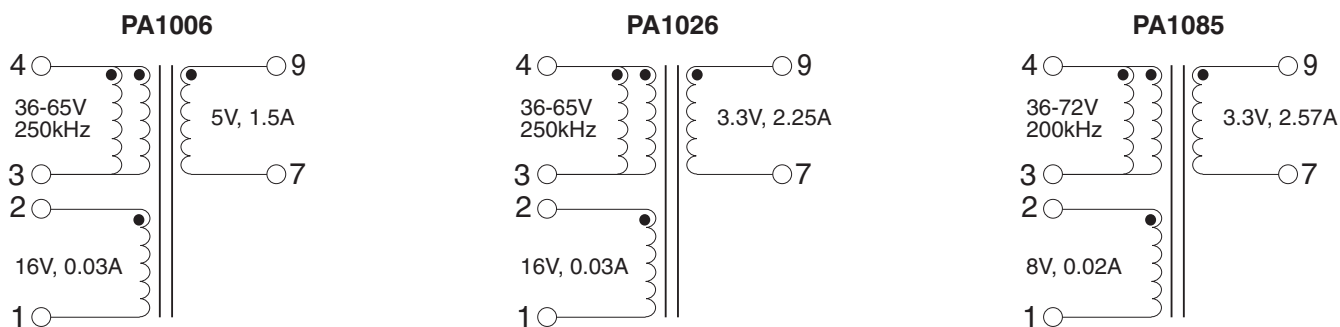

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

Pulse Northern Europe

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Pulse Southern Europe

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

Pulse China Headquarters

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 85538070
FAX: 86 769 85538870

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Road
Shanghai 200233
China
TEL: 86 21 54643211/2
FAX: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Road
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com