

MICRO SWITCH
 FREEPORT, ILLINOIS, U.S.A.
 A DIVISION OF HONEYWELL
 FED. MFG. CODE 91929



**ASSEMBLY-
 TOGGLE SWITCH**

**710AT11 SERIES
 CHART 1**

CATALOG LISTING	KEYWAY POSITION		CENTER POSITION		OPPOSITE KEYWAY POSITION	
	C-NC	C-NO	C-NO	C-NC	C-NC	C-NO
710AT11-5	1,2,3,4,5*	6,7,8,9,10*	NONE	ALL	6,7,8,9,10	1,2,3,4,5

* ASTERISK DENOTES MOMENTARY POSITION

710AT11 SERIES CHART 1
 PAGE 1 OF 1
M
 DRAWING NUMBER
 ISSUE 9
 REVISIONS
 A REIN DWG PR-12052-T
 27 JUL 83
 B 204594 GJW 18 DEC 01
 CHECK KJC 8 AUG 83
 CHECK CEC 10 AUG 83
 DRAWN
 D J S 27 JUL 83
 RASTER FO-8288 1-B
 DRAWN
 D J S 27 JUL 83
 RELEASE NO. PR-12052-T REPLACES

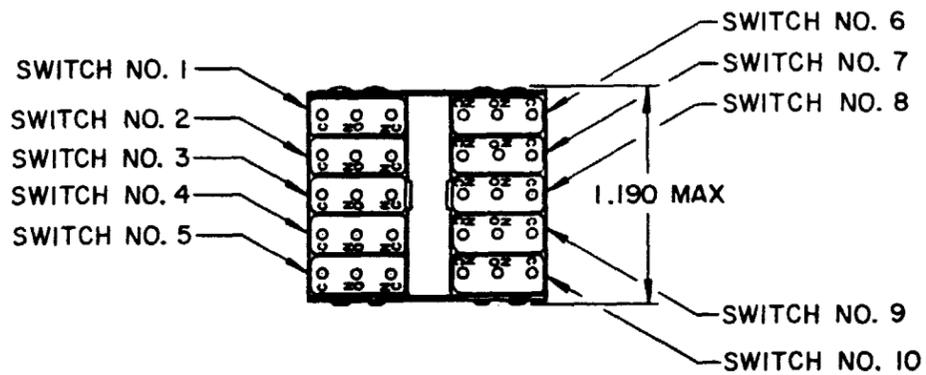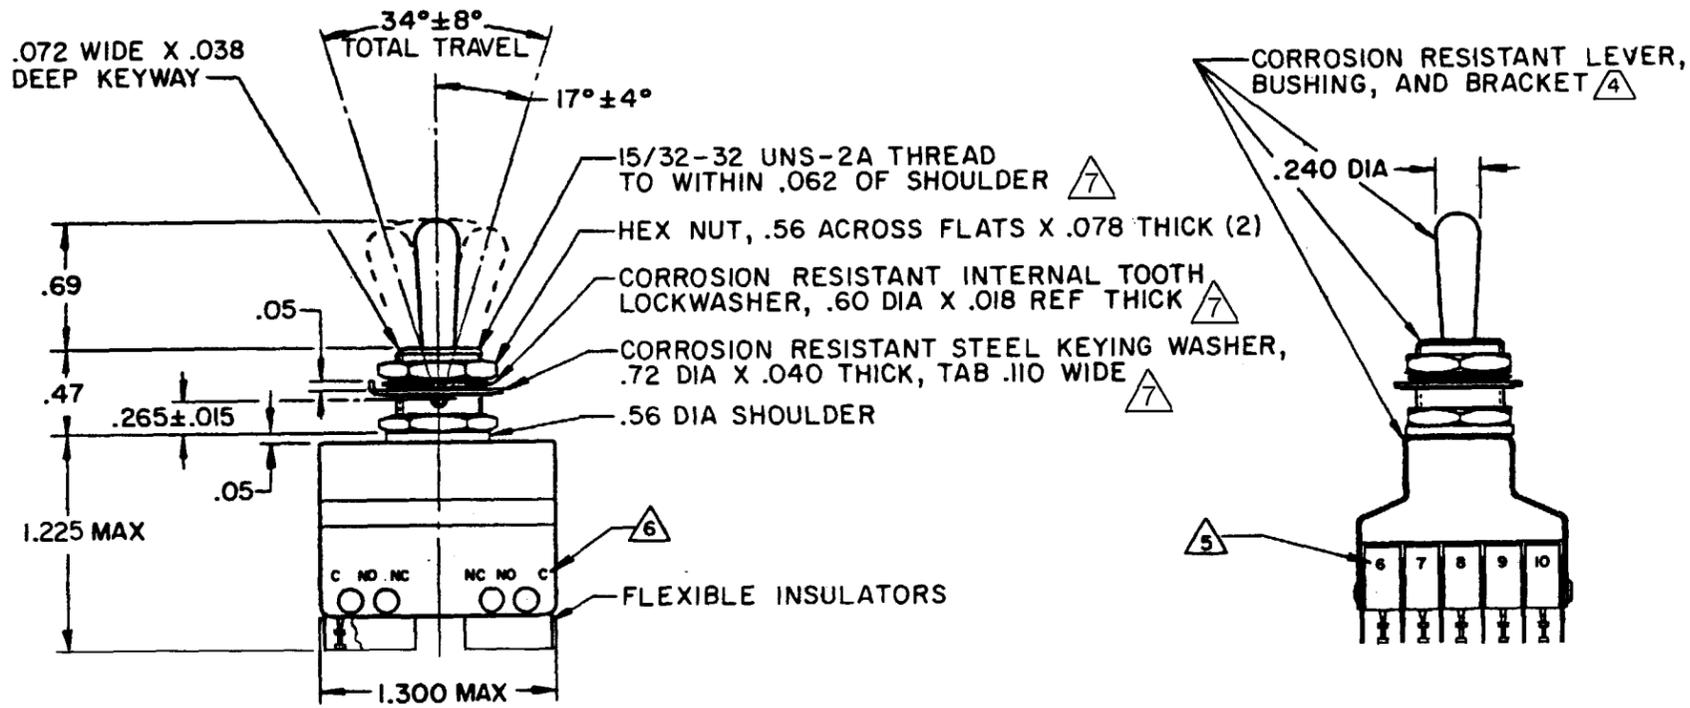

- NOTES**
- UNIT INCLUDES CATALOG LISTING 21SX39-T2 (MS-24547-4 BASIC SWITCHES (10)
 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - TERMINALS ARE PLATED FOR SOLDERING
 - (4) DULL FINISH ON LEVER AND BUSHING
 - (5) SWITCH NUMBERS STAMPED ON END OF BASIC SWITCHES
 - (6) TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF UN
 - (7) HARDWARE MAY BE FURNISHED UNASSEMBLED PER MIL-PRF-8805
 - (8) REPLACEMENT MOUNTING HARDWARE PACKET 15PA313-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA
	CONTACT ARRANGEMENT SPDT (10)

SCALE .FULL

DO NOT SCALE PRINT

TOLERANCES
 APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE X

DM.	TOL.	DM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/32	0.0150
ONE PLACE	X, X	0.4/018	X, X 0.0125
TWO PLACES	X, XX	0.10/.008	X, XX 0.007/010
THREE PLACES	X, XXX	0.10/.008	X, XXX 0.10/.008

DESIGN UNITS METRIC US CUSTOMARY

THIRD ANGLE PROJECTION

WEIGHT

DETAIL RATING CHART

VOLTS	CYCLE	AMPERES SEA LEVEL			AMPERES 50,000 FT		
		RES	IND	LAMP	RES	IND	LAMP
28	DC	7	4	2.5	4	2.5	2.5
115	60	7	7	2			

NOTE: INDUCTIVE LOADS: 28 VDC USE AN3179-6 INDUCTOR, 115 VAC AT 75 % PF

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[710AT11-5](#)