

RaspBee™

Datasheet

- The RaspBee is a ZigBee addon board for the Raspberry Pi (RPI). By using the RaspBee, the Raspberry Pi becomes a full functional wireless node which can be seamlessly integrated into Zigbee networks.
- Designed to interconnect with the RPi standard user header the RaspBee features a slim size. Hence the RPi still fits into the most housings available on the market.
- The RaspBee contains a powerful radio module with integrated PA/LNA. Together with the assembled onboard chip antenna which has been optimally tuned this ensures a superior RF performance.
- Available in two variants: "premium" (with ZigBee firmware) and "basic" (without firmware). In delivery condition both board options include a bootloader for simple firmware updates.
- Running on the RPi the deCONZ software facilitates ZigBee network control and monitoring. Even custom firmware solutions are possible.
- Mainly the RaspBee is designed to handle ZigBee Light Link (ZLL) and ZigBee Home Automation (ZHA) applications in connection with the RaspBee firmware and RPi software deCONZ.



Top and bottom view



Plugged on Raspberry Pi

Technical Data

Dimensions	48.0 x 16.5 x 12.0 mm
Operating temperature	- 40 to +85°C
Controls and display elements	2x LED (red, green)
Power supply	4.5 to 5.5 VDC
Power consumption @ 5.0 VDC	TX: 215 mA RX: 32 mA
Connections	12-pin 100 mil 2-row socket,
Antenna	Chip ceramic antenna
Antenna gain	+1.3 dBi (peak) - 0.5 dBi (average)
Antenna diversity	Yes (coax connector not assembled)
External front end connection	No
Range	Up to 500 m (line of sight *)
Frequency range	2.4 GHz
Transmit power	Max. +21 dBm **
Receiver sensitivity	-105 dBm (250 kbit/s)
Communication standard	IEEE 802.15.4
Data rate (gross)	250 kbit/s, 500 kbit/s, 1 Mbit/s, 2 Mbit/s
Microcontroller	ATmega256RFR2
Transceiver	Integrated
RF frontend	Integrated
Interfaces	UART, GPIO
Certification	CE, ETSI, FCC

* depending on the transmit power


** The ZigBee firmware limits this to +3 dBm. Obey national restrictions if using custom firmware.

Technical Data

Pin Assignment

1:	Vin	5.0 V supplied by RPi	7:	RXD	UART RX
2:	NC		8:	NC	
3:	NC		9:	TXD	UART TX
4:	NC		10:	GND	Ground
5:	GND	Ground	11:	SW1	GPIO for RaspBee
6:	NC		12:	RESET	Reset Signal for RaspBee

NC: not connected

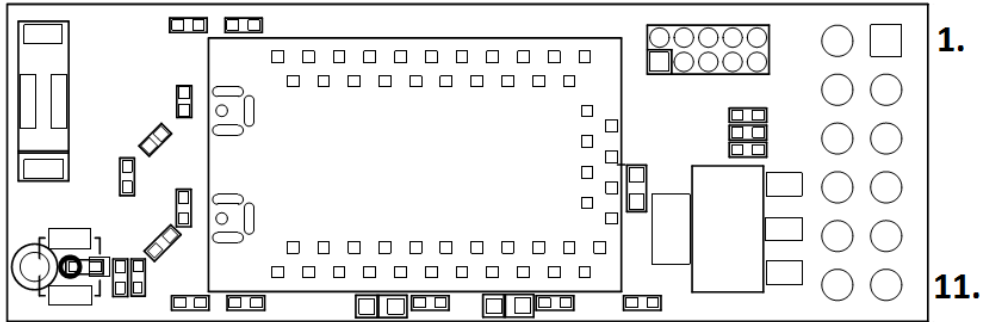

Pin assignment RaspBee

For detailed dimensions and notes to be applied please refer to the user manual.

Scope of delivery

RaspBee premium (ZigBee Firmware)
RaspBee basic (without Firmware ***)

Part number

BN-600052
BN-600053

Related products

FLS-PP Power PWM
FLS-A 0/1-10V Bus
FLS-P PWM Dim Control
FLS-RPC Dimmer

BN-600039
BN-600038
BN-600037
BN-600050

Board options

Radio module deRFmega256-23M12

BN-600013

*** Downloading and running the ZigBee firmware is possible, the network will be limited to five end devices however.

More detailed information about all variants can be found in the user manual.

Order online: <https://shop.dresden-elektronik.de>

Pin Assignment

Order Information

Options