

## FTG for VIA™ Pro-266 DDR Chipset

### Features


- Maximized EMI Suppression using Cypress's Spread Spectrum Technology
- System frequency synthesizer for VIA Pro-2000
- Programmable clock output frequency with less than 1 MHz increment
- Integrated fail-safe Watchdog Timer for system recovery
- Automatically switch to HW selected or SW programmed clock frequency when Watchdog Timer time-out
- Capable of generate system RESET after a Watchdog Timer time-out occurs or a change in output frequency via SMBus interface
- Support SMBus byte read/write and block read/ write operations to simplify system BIOS development
- Vendor ID and Revision ID support
- Programmable drive strength for CPU and PCI output clocks
- Programmable output skew between CPU, AGP and PCI

- Supports Intel® Celeron® and Pentium® III class processor
- Three copies of CPU output
- Nine copies of PCI output
- One 48 MHz output for USB
- One 24 MHz or 48 MHz output for SIO
- Two buffered reference outputs
- Three copies of APIC output
- Supports frequencies up to 200MHz
- SMBus Interface for programming
- Power management control inputs
- Available in 48-pin SSOP

### Key Specifications

|                                  |       |        |
|----------------------------------|-------|--------|
| CPU Cycle-to-cycle Jitter:       | ..... | 250 ps |
| CPU to CPU Output Skew.....      |       | 175 ps |
| PCI Cycle-to-cycle Jitter: ..... |       | 500 ps |
| PCI to PCI Output Skew:.....     |       | 500 ps |

### Block Diagram

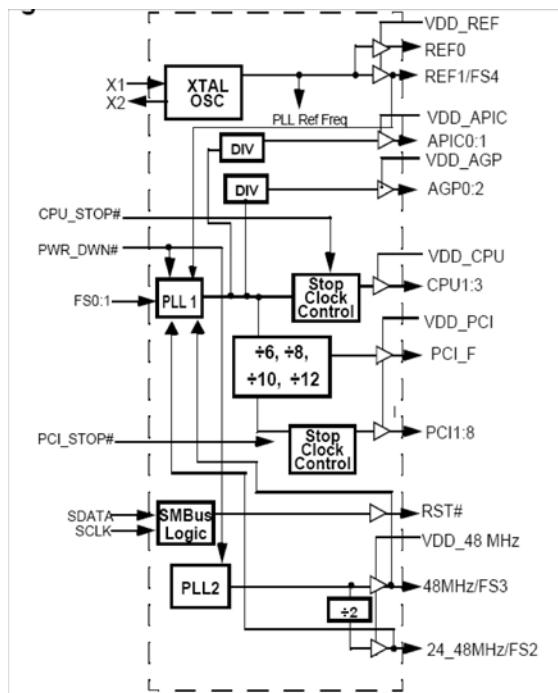

### Pin Configuration<sup>[1]</sup>

|                |    |    |            |
|----------------|----|----|------------|
| VDD_REF        | 1  | 48 | REF0       |
| GND_REF        | 2  | 47 | REF1/FS4*  |
| X1             | 3  | 46 | VDD_APIC   |
| X2             | 4  | 45 | APIC0      |
|                |    | 44 | APIC1      |
| VDD_48 MHz     | 5  | 43 | GND_APIC   |
| FS3*48 MHz     | 6  | 42 | APIC2      |
| FS2*/24_48 MHz | 7  | 41 | VDD_CPU    |
| GND_48 MHz     | 8  | 40 | GND_CPU    |
| PCI_F          | 9  | 39 | CPU1       |
| PCI1           | 10 | 38 | CPU2       |
| PCI2           | 11 | 37 | VDD_CPU    |
| GND_PCI        | 12 | 36 | GND_CPU    |
| PCI3           | 13 | 35 | CPU3       |
| PCI4           | 14 | 34 | CPU_STOP#* |
| VDD_PCI        | 15 | 33 | PCI_STOP#* |
| PCI5           | 16 | 32 | RST#       |
| PCI6           | 17 | 31 | VDD_CORE   |
| PCI7           | 18 | 30 | GND_CORE   |
| GND_PCI        | 19 | 29 | SDATA      |
| PCI8           | 20 | 28 | SCLK       |
| *FS1           | 21 | 27 | AGP2       |
| *FS0           | 22 | 26 | AGP1       |
| AGP0           | 23 | 25 | GND_AGP    |
| VDD_AGP        | 24 |    |            |

#### Note:

1. Signals marked with \* have internal pull-up resistors

**Pin Definitions**

| Pin Name   | Pin No.                              | Pin Type                  | Pin Description  |
|--|--------------------------------------|---------------------------|--|
| RST#<br>CPU1:3   | 32<br>39, 38, 35                     | O<br>(open<br>drain)<br>O | <b>System Reset Output:</b> Open-drain system reset output.<br><b>CPU Clock Output:</b> Frequency is set by the FS0:4 input or through serial input interface. The CPU1:3 outputs are gated by the CLK_STOP# input.  |
| CPU_STOP#  | 34                                   | I                         | <b>CPU Output Control:</b> 3.3V LVTTL-compatible input that stop CPU1:3.   |
| PCI1:8   | 10, 11, 13,<br>14, 16, 17,<br>18, 20 | O                         | <b>PCI Clock Outputs 1 through 8:</b> Frequency is set by FS0:4 inputs or through serial input interface; see <i>Table 5</i> for details. PCI1:8 outputs are gated by the PCI_STOP# input.   |
| PCI_STOP#  | 33                                   | O                         | <b>PCI_STOP# Input:</b> 3.3V LVTTL-compatible input that stops PCI1:8.   |
| PCI_F  | 9                                    | O                         | <b>Free-Running PCI Clock Output:</b> Frequency is set by FS0:4 inputs or through serial input interface; see <i>Table 5</i> for details.  |
| FS0:1<br>AGP0:2  | 21, 22<br>23, 26, 27                 | I<br>O                    | <b>Frequency Selection Inputs:</b> Selects CPU clock frequency as shown in <i>Table 1</i> .<br><b>AGP Clock Output:</b> This pin serves as the select strap to determine device operating frequency as described in <i>Table 5</i> .   |
| APIC0:2<br>48MHz/FS3                                       | 45, 44, 42<br>6                      | O<br>I/O                  | <b>APIC Clock Output:</b> APIC clock outputs.<br><b>48 MHz Output/Frequency Select 3:</b> 48 MHz is provided in normal operation. In standard PC systems, this output can be used as the reference for the Universal Serial Bus host controller. This pin also serves as a power-on strap option to determine device operating frequency as described in <i>Table 5</i> .  |
| 24_48MHz/<br>FS2<br>REF1/FS4                               | 7<br>47                              | I/O<br>I/O                | <b>24_48 MHz Output/Frequency Select 2:</b> In standard PC systems, this output can be used as the clock input for a Super I/O chip. The output frequency is controlled by Configuration Byte 3 bit[6]. The default output frequency is 24 MHz. This pin also serves as a power-on strap option to determine device operating frequency as described in <i>Table 5</i> .<br><b>Reference Clock Output 1/Frequency Select 4:</b> 3.3V 14.318 MHz output clock. This pin also serves as a power-on strap option to determine device operating frequency as described in <i>Table 5</i> . |
| REF0   | 48                                   | O                         | <b>Reference Clock Output 0:</b> 3.3V 14.318 MHz output clock.   |
| SCLK   | 28                                   | I                         | Clock pin for SMBus circuitry.   |
| SDATA  | 29                                   | I/O                       | Data pin for SMBus circuitry.  |
| X1   | 3                                    | I                         | <b>Crystal Connection or External Reference Frequency Input:</b> This pin has dual functions. It can be used as an external 14.318 MHz crystal connection or as an external reference frequency input.   |
| X2   | 41                                   | I                         | <b>Crystal Connection:</b> An input connection for an external 14.318 MHz crystal. If using an external reference, this pin must be left unconnected.  |
| VDD_REF,<br>VDD_48MHz,<br>VDD_PCI,<br>VDD_AGP,<br>VDD_CORE | 1, 5, 15, 24,<br>31                  | P                         | <b>Power Connection:</b> Power supply for core logic, PLL circuitry, PCI outputs, reference outputs, 48 MHz output, and 24-48 MHz output, connect to 3.3V supply.  |
| VDD_CPU,<br>VDD_APIC                                       | 41, 46, 37                           | P                         | <b>Power Connection:</b> Power supply for APIC and CPU output buffers, connect to 2.5V.  |

**Serial Data Interface**

The W311 features a two-pin, serial data interface that can be used to configure internal register settings that control particular device functions.

**Data Protocol**

The clock driver serial protocol supports byte/word write, byte/word read, block write and block read operations from the

controller. For block write/read operation, the bytes must be accessed in sequential order from lowest to highest byte with the ability to stop after any complete byte has been transferred. For byte/word write and byte read operations, system controller can access individual indexed byte. The offset of the indexed byte is encoded in the command code.

The definition for the command code is defined in *Table 2*.

**Table 1.**

| Bit | Descriptions   |
|-----|--|
| 7   | 0 = Block read or block write operation<br>1 = Byte/Word read or byte/word write operation                                     |
| 6:0 | Byte offset for byte/word read or write operation. For block read or write operations, these bits need to be set at '0000000'. |

**Table 2. Block Read and Block Write Protocol**

| Block Write Protocol |  | Block Read Protocol |  |
|----------------------|--|---------------------|--|
| Bit                  | Description  | Bit                 | Description  |
| 1                    | Start  | 1                   | Start  |
| 2:8                  | Slave address – 7 bits   | 2:8                 | Slave address – 7 bits   |
| 9                    | Write  | 9                   | Write  |
| 10                   | Acknowledge from slave   | 10                  | Acknowledge from slave   |
| 11:18                | Command Code – 8 bits<br>'00000000' stands for block operation | 11:18               | Command Code – 8 bits<br>'00000000' stands for block operation |
| 19                   | Acknowledge from slave   | 19                  | Acknowledge from slave   |
| 20:27                | Byte Count – 8 bits  | 20                  | Repeat start   |
| 28                   | Acknowledge from slave   | 21:27               | Slave address – 7 bits   |
| 29:36                | Data byte 0 – 8 bits   | 28                  | Read   |
| 37                   | Acknowledge from slave   | 29                  | Acknowledge from slave   |
| 38:45                | Data byte 1 – 8 bits   | 30:37               | Byte count from slave – 8 bits                                 |
| 46                   | Acknowledge from slave   | 38                  | Acknowledge  |
| ...                  | Data Byte N/Slave Acknowledge...                               | 39:46               | Data byte from slave – 8 bits                                  |
| ...                  | Data Byte N – 8 bits   | 47                  | Acknowledge  |
| ...                  | Acknowledge from slave   | 48:55               | Data byte from slave – 8 bits                                  |
| ...                  | Stop   | 56                  | Acknowledge  |
|                      |  | ...                 | Data bytes from slave/Acknowledge                              |
|                      |  | ...                 | Data byte N from slave – 8 bits                                |
|                      |  | ...                 | Not Acknowledge  |
|                      |  | ...                 | Stop   |

**Table 3. Word Read and Word Write Protocol**

| Word Write Protocol |  | Word Read Protocol |  |
|---------------------|--|--------------------|--|
| Bit                 | Description  | Bit                | Description  |
| 1                   | Start  | 1                  | Start  |
| 2:8                 | Slave address – 7 bits   | 2:8                | Slave address – 7 bits   |
| 9                   | Write  | 9                  | Write  |
| 10                  | Acknowledge from slave   | 10                 | Acknowledge from slave   |
| 11:18               | Command Code – 8 bits<br>'1xxxxxx' stands for byte or word operation<br>bit[6:0] of the command code represents the<br>offset of the byte to be accessed | 11:18              | Command Code – 8 bits<br>'1xxxxxx' stands for byte or word operation<br>bit[6:0] of the command code represents the<br>offset of the byte to be accessed |
| 19                  | Acknowledge from slave   | 19                 | Acknowledge from slave   |
| 20:27               | Data byte low – 8 bits   | 20                 | Repeat start   |
| 28                  | Acknowledge from slave   | 21:27              | Slave address – 7 bits   |
| 29:36               | Data byte high – 8 bits  | 28                 | Read   |
| 37                  | Acknowledge from slave   | 29                 | Acknowledge from slave   |
| 38                  | Stop   | 30:37              | Data byte low from slave – 8 bits  |
|                     |  | 38                 | Acknowledge  |
|                     |  | 39:46              | Data byte high from slave – 8 bits   |
|                     |  | 47                 | NOT acknowledge  |
|                     |  | 48                 | Stop   |

**Table 4. Byte Read and Byte Write Protocol**

| Byte Write Protocol |  | Byte Read Protocol |  |
|---------------------|--|--------------------|--|
| Bit                 | Description  | Bit                | Description  |
| 1                   | Start  | 1                  | Start  |
| 2:8                 | Slave address – 7 bits   | 2:8                | Slave address – 7 bits   |
| 9                   | Write  | 9                  | Write  |
| 10                  | Acknowledge from slave   | 10                 | Acknowledge from slave   |
| 11:18               | Command Code – 8 bits<br>'1xxxxxx' stands for byte operation<br>bit[6:0] of the command code represents the<br>offset of the byte to be accessed | 11:18              | Command Code – 8 bits<br>'1xxxxxx' stands for byte operation<br>bit[6:0] of the command code represents the<br>offset of the byte to be accessed |
| 19                  | Acknowledge from slave   | 19                 | Acknowledge from slave   |
| 20:27               | Data byte – 8 bits   | 20                 | Repeat start   |
| 28                  | Acknowledge from slave   | 21:27              | Slave address – 7 bits   |
| 29                  | Stop   | 28                 | Read   |
|                     |  | 29                 | Acknowledge from slave   |
|                     |  | 30:37              | Data byte from slave – 8 bits  |
|                     |  | 38                 | Not Acknowledge  |
|                     |  | 39                 | Stop   |



SILICON LABS

W311

## W311 Serial Configuration Map

1. The serial bits will be read by the clock driver in the following order:

Byte 0 - Bits 7, 6, 5, 4, 3, 2, 1, 0

Byte 1 - Bits 7, 6, 5, 4, 3, 2, 1, 0

Byte N - Bits 7, 6, 5, 4, 3, 2, 1, 0

2. All unused register bits (reserved and N/A) should be written to a "0" level.

3. All register bits labeled "Initialize to 0" must be written to zero during initialization.

### Byte 0: Control Register 0

| Bit   | Pin# | Name        | Default | Description   |
|-------|------|-------------|---------|---|
| Bit 7 | -    | Reserved    | 0       | Reserved  |
| Bit 6 | -    | SEL2        | 0       | See Table 5   |
| Bit 5 | -    | SEL1        | 0       | See Table 5   |
| Bit 4 | -    | SEL0        | 0       | See Table 5   |
| Bit 3 | -    | FS_Override | 0       | 0 = Select operating frequency by FS[4:0] input pins<br>1 = Select operating frequency by SEL[4:0] settings |
| Bit 2 | -    | SEL4        | 1       | See Table 5   |
| Bit 1 | -    | SEL3        | 0       | See Table 5   |
| Bit 0 | -    | Reserved    | 0       | Reserved  |

### Byte 1: Control Register 1

| Bit   | Pin# | Name           | Default | Description   |
|-------|------|----------------|---------|---|
| Bit 7 | -    | Reserved       | 0       | Reserved  |
| Bit 6 | -    | Spread Select2 | 0       | '000' = Normal (spread off)<br>'001' = Test Mode  |
| Bit 5 | -    | Spread Select1 | 0       | '010' = Reserved<br>'011' = Three-Stated<br>'100' = -0.5%<br>'101' = ± 0.5%<br>'110' = ± 0.25%<br>'111' = ± 0.38% |
| Bit 4 | -    | Spread Select0 | 0       |   |
| Bit 3 | 35   | CPU3           | 1       | (Active/Inactive)   |
| Bit 2 | 38   | CPU2           | 1       | (Active/Inactive)   |
| Bit 1 | 39   | CPU1           | 1       | (Active/Inactive)   |
| Bit 0 | 42   | APIC2          | 1       | (Active/Inactive)   |

### Byte 2: Control Register 2

| Bit   | Pin# | Name | Default | Description       |
|-------|------|------|---------|-------------------|
| Bit 7 | 20   | PC8  | 1       | (Active/Inactive) |
| Bit 6 | 18   | PCI7 | 1       | (Active/Inactive) |
| Bit 5 | 17   | PCI6 | 1       | (Active/Inactive) |
| Bit 4 | 16   | PCI5 | 1       | (Active/Inactive) |
| Bit 3 | 14   | PCI4 | 1       | (Active/Inactive) |
| Bit 2 | 13   | PCI3 | 1       | (Active/Inactive) |
| Bit 1 | 11   | PCI2 | 1       | (Active/Inactive) |
| Bit 0 | 10   | PCI1 | 1       | (Active/Inactive) |

**Byte 3: Control Register**

| Bit   | Pin# | Name      | Default | Description   |
|-------|------|-----------|---------|---|
| Bit 7 | --   | Reserved  | 0       | Reserved  |
| Bit 6 | 7    | SEL_48MHz | 0       | 0 = Select 24 MHz as output<br>1 = Select 48 MHz as output (default). |
| Bit 5 | 6    | 48MHz     | 1       | (Active/Inactive)   |
| Bit 4 | 7    | 24_48MHz  | 1       | (Active/Inactive)   |
| Bit 3 | 9    | PCI_F     | 1       | (Active/Inactive)   |
| Bit 2 | 27   | AGP2      | 1       | (Active/Inactive)   |
| Bit 1 | 26   | AGP1      | 1       | (Active/Inactive)   |
| Bit 0 | 23   | AGP0      | 1       | (Active/Inactive)   |

**Byte 4: Watchdog Timer Register**

| Bit   | Pin# | Name      | Default | Description  |
|-------|------|-----------|---------|--|
| Bit 7 | -    | PCI_Skew1 | 0       | PCI skew control<br>00 = Normal<br>01 = -500 ps<br>10 = Reserved<br>11 = +500 ps   |
| Bit 6 | -    | PCI_Skew0 | 0       | These bits store the time-out value of the Watchdog Timer. The scale of the timer is determined by the pre-scaler.   |
| Bit 5 | -    | WD_TIMER4 | 1       |  |
| Bit 4 | -    | WD_TIMER3 | 1       | The timer can support a value of 150 ms to 4.8 sec when the pre-scaler is set to 150 ms. If the pre-scaler is set to 2.5 sec, it can support a value from 2.5 sec to 80 sec. |
| Bit 3 | -    | WD_TIMER2 | 1       |  |
| Bit 2 | -    | WD_TIMER1 | 1       | When the Watchdog Timer reaches to "0", it will set the WD_To_STATUS bit and generate Reset if RST_EN_WD is enabled  |
| Bit 1 | -    | WD_TIMER0 | 1       | 0 = 150 ms<br>1 = 2.5 sec  |
| Bit 0 | -    |           |         |  |

**Byte 5: Control Register 5**

| Bit   | Pin# | Name         | Default | Description              |
|-------|------|--------------|---------|--------------------------|
| Bit 7 | 6    | 48Mhz_DRV    | 1       | 0 = Norm, 1 = High Drive |
| Bit 6 | 7    | 24_48MHz_DRV | 1       | 0 = Norm, 1 = High Drive |
| Bit 5 | 44   | APIC1        | 1       | (Active/Inactive)        |
| Bit 4 | 45   | APIC0        | 1       | (Active/Inactive)        |
| Bit 3 | -    | Reserved     | 0       | Reserved                 |
| Bit 2 | -    | Reserved     | 0       | Reserved                 |
| Bit 1 | 47   | REF1         | 1       | (Active/Inactive)        |
| Bit 0 | 48   | REF0         | 1       | (Active/Inactive)        |

**Byte 6: Reserved Register**

| Bit   | Name     | Default | Pin Description |
|-------|----------|---------|-----------------|
| Bit 7 | Reserved | 1       | Reserved        |
| Bit 6 | Reserved | 1       | Reserved        |
| Bit 5 | Reserved | 1       | Reserved        |
| Bit 4 | Reserved | 1       | Reserved        |
| Bit 3 | Reserved | 1       | Reserved        |
| Bit 2 | Reserved | 1       | Reserved        |
| Bit 1 | Reserved | 1       | Reserved        |
| Bit 0 | Reserved | 1       | Reserved        |

**Byte 7: Reserved Register**

| Bit   | Name     | Default | Pin Description |
|-------|----------|---------|-----------------|
| Bit 7 | Reserved | 1       | Reserved        |
| Bit 6 | Reserved | 1       | Reserved        |
| Bit 5 | Reserved | 1       | Reserved        |
| Bit 4 | Reserved | 1       | Reserved        |
| Bit 3 | Reserved | 1       | Reserved        |
| Bit 2 | Reserved | 1       | Reserved        |
| Bit 1 | Reserved | 1       | Reserved        |
| Bit 0 | Reserved | 1       | Reserved        |

**Byte 8: Vendor ID and Revision ID Register (Read Only)**

| Bit   | Name         | Default | Pin Description   |
|-------|--------------|---------|---|
| Bit 7 | Revision_ID3 | 0       | Revision ID bit[3]  |
| Bit 6 | Revision_ID2 | 0       | Revision ID bit[2]  |
| Bit 5 | Revision_ID1 | 0       | Revision ID bit[1]  |
| Bit 4 | Revision_ID0 | 0       | Revision ID bit[0]  |
| Bit 3 | Vendor_ID3   | 1       | Bit[3] of Cypress Semiconductor's Vendor ID. This bit is read only. |
| Bit 2 | Vendor_ID2   | 0       | Bit[2] of Cypress Semiconductor's Vendor ID. This bit is read only. |
| Bit 1 | Vendor_ID1   | 0       | Bit[1] of Cypress Semiconductor's Vendor ID. This bit is read only. |
| Bit 0 | Vendor_ID0   | 0       | Bit[0] of Cypress Semiconductor's Vendor ID. This bit is read only. |

**Byte 9: System Reset and Watchdog Timer Register**

| Bit   | Name         | Default | Pin Description   |
|-------|--------------|---------|---|
| Bit 7 | Reserved     | 0       | Reserved  |
| Bit 6 | PCI_DRV      | 0       | PCI clock output drive strength<br>0 = Normal<br>1 = High Drive   |
| Bit 5 | Reserved     | 0       | Reserved  |
| Bit 4 | RST_EN_WD    | 0       | This bit will enable the generation of a Reset pulse when a watchdog timer time-out occurs.<br>0 = Disabled<br>1 = Enabled  |
| Bit 3 | RST_EN_FC    | 0       | This bit will enable the generation of a Reset pulse after a frequency change occurs.<br>0 = Disabled<br>1 = Enabled  |
| Bit 2 | WD_TO_STATUS | 0       | Watchdog Timer Time-out Status bit<br>0 = No time-out occurs (READ); Ignore (WRITE)<br>1 = time-out occurred (READ); Clear WD_TO_STATUS (WRITE)   |
| Bit 1 | WD_EN        | 0       | 0 = Stop and re-load Watchdog Timer<br>1 = Enable Watchdog Timer. It will start counting down after a frequency change occurs.<br><b>Note:</b> W311 will generate system reset, reload a recovery frequency, and lock itself into a recovery frequency mode after a watchdog timer time-out occurs. Under recovery frequency mode, W311 will not respond to any attempt to change output frequency via the SMBus control bytes. System software can unlock W311 from its recovery frequency mode by clearing the WD_EN bit. |
| Bit 0 | Reserved     | 0       | Reserved  |

**Byte 10: Skew Control Register**

| Bit   | Name      | Default | Description  |
|-------|-----------|---------|--|
| Bit 7 | CPU_Skew2 | 0       | CPU skew control<br>000 = Normal<br>001 = -150 ps  |
| Bit 6 | CPU_Skew1 | 0       | 010 = -300 ps<br>011 = -450 ps<br>100 = +150 ps<br>101 = +300 ps<br>110 = +450 ps<br>111 = +600 ps |
| Bit 5 | CPU_Skew0 | 0       |  |
| Bit 4 | Reserved  | 0       | Reserved   |
| Bit 3 | Reserved  | 0       | Reserved   |
| Bit 2 | Reserved  | 0       | Reserved   |
| Bit 1 | AGP_Skew1 | 0       | AGP skew control<br>00 = Normal<br>01 = -150 ps<br>10 = +150 ps<br>11 = +300 ps                    |
| Bit 0 | AGP_Skew0 | 0       |  |

**Byte 11: Recovery Frequency N - Value Register**

| Bit   | Name         | Default | Description  |
|-------|--------------|---------|--|
| Bit 7 | ROCV_FREQ_N7 | 0       | If ROCV_FREQ_SEL is set, W311 will use the values programmed in ROCV_FREQ_N[7:0] and ROCV_FREQ_M[6:0] to determine the recovery CPU output frequency when a Watchdog Timer time-out occurs.  |
| Bit 6 | ROCV_FREQ_N6 | 0       |  |
| Bit 5 | ROCV_FREQ_N5 | 0       | The setting of FS_Override bit determines the frequency ratio for CPU, SDRAM, AGP and SDRAM. When it is cleared, W311 will use the same frequency ratio stated in the Latched FS[4:0] register. When it is set, W311 will use the frequency ratio stated in the SEL[4:0] register. |
| Bit 4 | ROCV_FREQ_N4 | 0       |  |
| Bit 3 | ROCV_FREQ_N3 | 0       |  |
| Bit 2 | ROCV_FREQ_N2 | 0       | W312 supports programmable CPU frequency ranging from 50 MHz to 248 MHz.   |
| Bit 1 | ROCV_FREQ_N1 | 0       |  |
| Bit 0 | ROCV_FREQ_N0 | 0       | W311 will change the output frequency whenever there is an update to either ROCV_FREQ_N[7:0] and ROCV_FREQ_M[6:0]. Therefore, it is recommended to use Word or Block write to update both registers within the same SMBus bus operation.   |

**Byte 12: Recovery Frequency M- Value Register**

| Bit   | Name          | Default | Pin Description  |
|-------|---------------|---------|--|
| Bit 7 | ROCV_FREQ_SEL | 0       | ROCV_FREQ_SEL determines the source of the recover frequency when a Watchdog Timer time-out occurs. The clock generator will automatically switch to the recovery CPU frequency based on the selection on ROCV_FREQ_SEL.<br>0 = From latched FS[4:0]<br>1 = From the settings of ROCV_FREQ_N[7:0] & ROCV_FREQ_M[6:0] |
| Bit 6 | ROCV_FREQ_M6  | 0       |  |
| Bit 5 | ROCV_FREQ_M5  | 0       |  |
| Bit 4 | ROCV_FREQ_M4  | 0       |  |
| Bit 3 | ROCV_FREQ_M3  | 0       |  |
| Bit 2 | ROCV_FREQ_M2  | 0       |  |
| Bit 1 | ROCV_FREQ_M1  | 0       |  |
| Bit 0 | ROCV_FREQ_M0  | 0       |  |

**Byte 13: Programmable Frequency Select N-Value Register**

| Bit   | Name        | Default | Pin Description  |
|-------|-------------|---------|--|
| Bit 7 | CPU_FSEL_N7 | 0       |  |
| Bit 6 | CPU_FSEL_N6 | 0       |  |
| Bit 5 | CPU_FSEL_N5 | 0       |  |
| Bit 4 | CPU_FSEL_N4 | 0       |  |
| Bit 3 | CPU_FSEL_N3 | 0       |  |
| Bit 2 | CPU_FSEL_N2 | 0       |  |
| Bit 1 | CPU_FSEL_N1 | 0       |  |
| Bit 0 | CPU_FSEL_N0 | 0       | If Prog_Freq_EN is set, W311 will use the values programmed in CPU_FSEL_N[7:0] and CPU_FSEL_M[6:0] to determine the CPU output frequency. The new frequency will start to load whenever CPU_FSELM[6:0] is updated. The setting of FS_Override bit determines the frequency ratio for CPU, SDRAM, AGP and SDRAM. When it is cleared, W311 will use the same frequency ratio stated in the Latched FS[4:0] register. When it is set, W311 will use the frequency ratio stated in the SEL[4:0] register. W311 supports programmable CPU frequency ranging from 50 MHz to 248 MHz. |

**Byte 14: Programmable Frequency Select N-Value Register**

| Bit   | Name        | Default | Description  |
|-------|-------------|---------|--|
| Bit 7 | Pro_Freq_EN | 0       | Programmable output frequencies enabled<br>0 = disabled<br>1 = enabled |
| Bit 6 | CPU_FSEL_M6 | 0       |  |
| Bit 5 | CPU_FSEL_M5 | 0       |  |
| Bit 4 | CPU_FSEL_M4 | 0       |  |
| Bit 3 | CPU_FSEL_M3 | 0       |  |
| Bit 2 | CPU_FSEL_M2 | 0       |  |
| Bit 1 | CPU_FSEL_M1 | 0       |  |
| Bit 0 | CPU_FSEL_M0 | 0       |  |

**Byte 15: Reserved Register**

| Bit   | Pin# | Name              | Default | Description                                       |
|-------|------|-------------------|---------|---|
| Bit 7 | 47   | Latched FS4 input | X       | Latched FS[4:0] inputs. These bits are read only. |
| Bit 6 | 6    | Latched FS3 input | X       |   |
| Bit 5 | 7    | Latched FS2 input | X       |   |
| Bit 4 | 21   | Latched FS1 input | X       |   |
| Bit 3 | 22   | Latched FS0 input | X       |   |
| Bit 2 | -    | Vendor test mode  | 0       | Reserved. Write with '0'                          |
| Bit 1 | -    | Vendor test mode  | 1       | Reserved. Write with '1'                          |
| Bit 0 | -    | Vendor test mode  | 1       | Reserved. Write with '1'                          |

**Byte 16: Reserved Register**

| Bit   | Pin# | Name             | Default | Description               |
|-------|------|------------------|---------|---------------------------|
| Bit 7 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 6 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 5 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 4 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 3 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 2 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 1 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 0 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |

**Byte 17: Reserved Register**

| Bit   | Pin# | Name             | Default | Description               |
|-------|------|------------------|---------|---------------------------|
| Bit 7 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 6 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 5 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 4 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 3 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 2 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 1 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |
| Bit 0 | -    | Vendor test mode | 0       | Reserved. Write with '0'. |

**Table 5. Additional Frequency Selections through Serial Data Interface Data Bytes**

| Input Conditions |      |      |      |      | Output Frequency |      |      | PLL Gear Constants (G) |
|------------------|------|------|------|------|------------------|------|------|------------------------|
| FS4              | FS3  | FS2  | FS1  | FS0  | CPU              | 3V66 | PCI  |                        |
| SEL4             | SEL3 | SEL2 | SEL1 | SEL0 |                  |      |      |                        |
| 0                | 0    | 0    | 0    | 0    | 200.0            | 66.6 | 33.3 | 48.00741               |
| 0                | 0    | 0    | 0    | 1    | 190.0            | 76.0 | 38.0 | 48.00741               |
| 0                | 0    | 0    | 1    | 0    | 180.0            | 72.0 | 36.0 | 48.00741               |
| 0                | 0    | 0    | 1    | 1    | 170.0            | 68.0 | 34.0 | 48.00741               |
| 0                | 0    | 1    | 0    | 0    | 166.0            | 66.4 | 33.2 | 48.00741               |
| 0                | 0    | 1    | 0    | 1    | 160.0            | 64.0 | 32.0 | 48.00741               |
| 0                | 0    | 1    | 1    | 0    | 150.0            | 75.0 | 37.5 | 48.00741               |
| 0                | 0    | 1    | 1    | 1    | 145.0            | 72.5 | 36.3 | 48.00741               |
| 0                | 1    | 0    | 0    | 0    | 140.0            | 70.0 | 35.0 | 48.00741               |
| 0                | 1    | 0    | 0    | 1    | 136.0            | 68.0 | 34.0 | 48.00741               |
| 0                | 1    | 0    | 1    | 0    | 130.0            | 65.0 | 32.5 | 48.00741               |
| 0                | 1    | 0    | 1    | 1    | 124.0            | 62.0 | 31.0 | 48.00741               |
| 0                | 1    | 1    | 0    | 0    | 66.6             | 66.6 | 33.3 | 48.00741               |
| 0                | 1    | 1    | 0    | 1    | 100.0            | 66.6 | 33.3 | 48.00741               |
| 0                | 1    | 1    | 1    | 0    | 118.0            | 78.7 | 39.3 | 48.00741               |
| 0                | 1    | 1    | 1    | 1    | 133.3            | 66.6 | 33.3 | 48.00741               |
| 1                | 0    | 0    | 0    | 0    | 66.8             | 66.8 | 33.4 | 48.00741               |
| 1                | 0    | 0    | 0    | 1    | 100.2            | 66.8 | 33.4 | 48.00741               |
| 1                | 0    | 0    | 1    | 0    | 115.0            | 76.7 | 38.3 | 48.00741               |
| 1                | 0    | 0    | 1    | 1    | 133.6            | 66.8 | 33.4 | 48.00741               |
| 1                | 0    | 1    | 0    | 0    | 66.8             | 66.8 | 33.4 | 48.00741               |
| 1                | 0    | 1    | 0    | 1    | 100.2            | 66.8 | 33.4 | 48.00741               |
| 1                | 0    | 1    | 1    | 0    | 110.0            | 73.3 | 36.7 | 48.00741               |
| 1                | 0    | 1    | 1    | 1    | 133.6            | 66.8 | 33.4 | 48.00741               |
| 1                | 1    | 0    | 0    | 0    | 105.0            | 70.0 | 35.0 | 48.00741               |
| 1                | 1    | 0    | 0    | 1    | 90.0             | 60.0 | 30.0 | 48.00741               |
| 1                | 1    | 0    | 1    | 0    | 85.0             | 56.7 | 28.3 | 48.00741               |
| 1                | 1    | 0    | 1    | 1    | 78.0             | 78.0 | 39.0 | 48.00741               |
| 1                | 1    | 1    | 0    | 0    | 66.6             | 66.6 | 33.3 | 48.00741               |
| 1                | 1    | 1    | 0    | 1    | 100.0            | 66.6 | 33.3 | 48.00741               |
| 1                | 1    | 1    | 1    | 0    | 75.0             | 75.0 | 37.5 | 48.00741               |
| 1                | 1    | 1    | 1    | 1    | 133.3            | 66.6 | 33.3 | 48.00741               |

**Programmable Output Frequency, Watchdog Timer and Recovery Output Frequency Functional Description**

The Programmable Output Frequency feature allows users to generate any CPU output frequency from the range of 50 MHz to 248 MHz. Cypress offers the most dynamic and the simplest programming interface for system developers to utilize this feature in their platforms.

The Watchdog Timer and Recovery Output Frequency features allow users to implement a recovery mechanism when the system hangs or getting unstable. System BIOS or other control software can enable the Watchdog timer before they attempt to make a frequency change. If the system hangs and a Watchdog timer time-out occurs, a system reset will be generated and a recovery frequency will be activated.

All of the related registers are summarized in Table 7.

**Table 6. Register Summary**

| Name                                       | Description  |
|--|--|
| Pro_Freq_EN                                | <p>Programmable output frequencies enabled</p> <p>0 = Disabled (default)</p> <p>1 = Enabled</p> <p>When it is disabled, the operating output frequency will be determined by either the latched value of FS[4:0] inputs or the programmed value of SEL[4:0]. If FS_Override bit is clear, latched FS[4:0] inputs will be used. If FS_Override bit is set, programmed value of SEL[4:0] will be used.</p> <p>When it is enabled, the CPU output frequency will be determined by the programmed value of CPUFSEL_N, CPUFSEL_M and the PLL Gear Constant. The program value of FS_Override, SEL[4:0] or the latched value of FS[4:0] will determine the PLL Gear Constant and the frequency ratio between CPU and other frequency outputs.</p>  |
| FS_Override                                | <p>When Pro_Freq_EN is cleared or disabled,</p> <p>0 = Select operating frequency by FS input pins (default)</p> <p>1 = Select operating frequency by SEL bits in SMBus control bytes</p> <p>When Pro_Freq_EN is set or enabled,</p> <p>0 = Frequency output ratio between CPU and other frequency groups and the PLL Gear Constant are based on the latched value of FS input pins (default)</p> <p>1 = Frequency output ratio between CPU and other frequency groups and the PLL Gear Constant are based on the programmed value of SEL bits in SMBus control bytes</p>  |
| CPU_FSEL_N,<br>CPU_FSEL_M<br>ROCV_FREQ_SEL | <p>When Prog_Freq_EN is set or enabled, the values programmed in CPU_FSEL_N[7:0] and CPU_FSEL_M[6:0] determines the CPU output frequency. The new frequency will start to load whenever there is an update to either CPU_FSEL_N[7:0] or CPU_FSEL_M[6:0]. Therefore, it is recommended to use Word or Block write to update both registers within the same SMBus bus operation.</p> <p>The setting of FS_Override bit determines the frequency ratio for CPU, AGP and PCI. When FS_Override is cleared or disabled, the frequency ratio follows the latched value of the FS input pins. When FS_Override is set or enabled, the frequency ratio follows the programmed value of SEL bits in SMBus control bytes.</p> <p>ROCV_FREQ_SEL determines the source of the recover frequency when a Watchdog Timer timeout occurs. The clock generator will automatically switch to the recovery CPU frequency based on the selection on ROCV_FREQ_SEL.</p> <p>0 = From latched FS[4:0]</p> <p>1 = From the settings of ROCV_FREQ_N[7:0] &amp; ROCV_FREQ_M[6:0]</p> |
| ROCV_FREQ_N[7:0],<br>ROCV_FREQ_M[6:0]      | <p>When ROCV_FREQ_SEL is set, the values programmed in ROCV_FREQ_N[7:0] and ROCV_FREQ_M[6:0] will be used to determine the recovery CPU output frequency when a Watchdog Timer time-out occurs</p> <p>The setting of FS_Override bit determines the frequency ratio for CPU, AGP and PCI. When it is cleared, the same frequency ratio stated in the Latched FS[4:0] register will be used.</p> <p>When it is set, the frequency ratio stated in the SEL[4:0] register will be used.</p> <p>The new frequency will start to load whenever there is an update to either ROCV_FREQ_N[7:0] and ROCV_FREQ_M[6:0]. Therefore, it is recommended to use word or block write to update both registers within the same SMBus bus operation.</p>  |
| WD_EN                                      | <p>0 = Stop and reload Watchdog Timer</p> <p>1 = Enable Watchdog Timer. It will start counting down after a frequency change occurs.</p>   |
| Pro_Freq_EN                                | <p>Programmable output frequencies enabled</p> <p>0 = Disabled (default)</p> <p>1 = Enabled</p> <p>When it is disabled, the operating output frequency will be determined by either the latched value of FS[4:0] inputs or the programmed value of SEL[4:0]. If FS_Override bit is clear, latched FS[4:0] inputs will be used. If FS_Override bit is set, programmed value of SEL[4:0] will be used.</p> <p>When it is enabled, the CPU output frequency will be determined by the programmed value of CPUFSEL_N, CPUFSEL_M and the PLL Gear Constant. The program value of FS_Override, SEL[4:0] or the latched value of FS[4:0] will determine the PLL Gear Constant and the frequency ratio between CPU and other frequency outputs.</p>  |

**Table 6. Register Summary (continued)**

| Name                                       | Description   |
|--|---|
| FS_Override                                | When Pro_Freq_EN is cleared or disabled,<br>0 = Select operating frequency by FS input pins (default)<br>1 = Select operating frequency by SEL bits in SMBus control bytes<br>When Pro_Freq_EN is set or enabled,<br>0 = Frequency output ratio between CPU and other frequency groups and the PLL Gear Constant are based on the latched value of FS input pins (default)<br>1 = Frequency output ratio between CPU and other frequency groups and the PLL Gear Constant are based on the programmed value of SEL bits in SMBus control bytes  |
| CPU_FSEL_N,<br>CPU_FSEL_M<br>ROCV_FREQ_SEL | When Prog_Freq_EN is set or enabled, the values programmed in CPU_FSEL_N[7:0] and CPU_FSEL_M[6:0] determines the CPU output frequency. The new frequency will start to load whenever there is an update to either CPU_FSEL_N[7:0] or CPU_FSEL_M[6:0]. Therefore, it is recommended to use Word or Block write to update both registers within the same SMBus bus operation.<br>The setting of FS_Override bit determines the frequency ratio for CPU, AGP and PCI. When FS_Override is cleared or disabled, the frequency ratio follows the latched value of the FS input pins. When FS_Override is set or enabled, the frequency ratio follows the programmed value of SEL bits in SMBus control bytes.<br>ROCV_FREQ_SEL determines the source of the recover frequency when a Watchdog Timer timeout occurs. The clock generator will automatically switch to the recovery CPU frequency based on the selection on ROCV_FREQ_SEL.<br>0 = From latched FS[4:0]<br>1 = From the settings of ROCV_FREQ_N[7:0] & ROCV_FREQ_M[6:0] |
| WD_PRE_SCALER                              | 0 = 150 ms<br>1 = 2.5 sec   |
| RST_EN_WD                                  | This bit will enable the generation of a Reset pulse when a Watchdog timer time-out occurs.<br>0 = Disabled<br>1 = Enabled  |
| RST_EN_FC                                  | This bit will enable the generation of a Reset pulse after a frequency change occurs.<br>0 = Disabled<br>1 = Enabled  |

#### How to Program CPU Output Frequency

When the programmable output frequency feature is enabled (Pro\_Freq\_EN bit is set), the CPU output frequency is determined by the following equation:

$$F_{cpu} = G * (N+3)/(M+3)$$

"N" and "M" are the values programmed in Programmable Frequency Select N-Value Register and M-Value Register, respectively.

"G" stands for the PLL Gear Constant, which is determined by the programmed value of FS[4:0] or SEL[4:0]. The value is listed in *Table 5*. The ratio of (N+3) and (M+3) need to be greater than "1"  $[(N+3)/(M+3) > 1]$ .

*Table 7* lists set of N and M values for different frequency output ranges. This example use a fixed value for the M-Value Register and select the CPU output frequency by changing the value of the N-Value Register.

**Table 7. Examples of N and M Value for Different CPU Frequency Range**

| Frequency Ranges | Gear Constants | Fixed Value for M-Value Register | Range of N-Value Register for Different CPU Frequency |
|------------------|----------------|----------------------------------|---|
| 50 MHz–129 MHz   | 48.00741       | 93                               | 97–255  |
| 130 MHz–248 MHz  | 48.00741       | 45                               | 127–245   |

**SILICON LABS****W311****Absolute Maximum Ratings<sup>[2]</sup>**

Stresses greater than those listed in this table may cause permanent damage to the device. These represent a stress rating only. Operation of the device at these or any other condi-

tions above those specified in the operating sections of this specification is not implied. Maximum conditions for extended periods may affect reliability.

| Parameter        | Description                            | Rating       | Unit |
|------------------|--|--------------|------|
| $V_{DD}, V_{IN}$ | Voltage on any pin with respect to GND | -0.5 to +7.0 | V    |
| $T_{STG}$        | Storage Temperature                    | -65 to +150  | °C   |
| $T_B$            | Ambient Temperature under Bias         | -55 to +125  | °C   |
| $T_A$            | Operating Temperature                  | 0 to +70     | °C   |
| $ESD_{PROT}$     | Input ESD Protection                   | 2 (min.)     | kV   |

**DC Electrical Characteristics:**  $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}\pm5\%$  and  $2.5\text{V}\pm5\%$

| Parameter             | Description                       |                                  | Test Condition          | Min.      | Typ. | Max.           | Unit |
|-----------------------|-----------------------------------|----------------------------------|-------------------------|-----------|------|----------------|------|
| <b>Supply Current</b> |                                   |                                  |                         |           |      |                |      |
| $I_{DD}$              | 3.3V Supply Current               | CPU [1:3]=133 MHz <sup>[3]</sup> |                         | -         | 260  | -              | mA   |
| $I_{DD}$              | 2.5V Supply Current               |                                  |                         | -         | 25   | -              | mA   |
| <b>Logic Inputs</b>   |                                   |                                  |                         |           |      |                |      |
| $V_{IL}$              | Input Low Voltage                 |                                  |                         | GND - 0.3 | -    | 0.8            | V    |
| $V_{IH}$              | Input High Voltage                |                                  |                         | 2.0       | -    | $V_{DD} + 0.3$ | V    |
| $I_{IL}$              | Input Low Current <sup>[4]</sup>  |                                  |                         | -         | -    | -25            | µA   |
| $I_{IH}$              | Input High Current <sup>[4]</sup> |                                  |                         | -         | -    | 10             | µA   |
| <b>Clock Outputs</b>  |                                   |                                  |                         |           |      |                |      |
| $V_{OL}$              | Output Low Voltage                | $I_{OL} = 1\text{ mA}$           |                         | -         | -    | 50             | mV   |
| $V_{OH}$              | Output High Voltage               | $I_{OH} = -1\text{ mA}$          |                         | 3.1       | -    | -              | V    |
| $V_{OH}$              | Output Low Voltage                | CPUT[1:3]<br>APIC[0:2]           | $I_{OH} = -1\text{ mA}$ | 2.2       | -    | -              | V    |
| $I_{OL}$              | Output Low Current                | CPU1:3                           | $V_{OL} = 1.25\text{V}$ | 27        | 57   | 97             | mA   |
|                       |                                   | PCI_F, PCI1:8                    | $V_{OL} = 1.5\text{V}$  | 20.5      | 53   | 139            | mA   |
|                       |                                   | AGP0:2                           | $V_{OL} = 1.25\text{V}$ | 40        | 85   | 140            | mA   |
|                       |                                   | APIC0:2                          | $V_{OL} = 1.25\text{V}$ | 40        | 85   | 140            | mA   |
|                       |                                   | REF0:1                           | $V_{OL} = 1.5\text{V}$  | 25        | 37   | 76             | mA   |
|                       |                                   | 48-MHz                           | $V_{OL} = 1.5\text{V}$  | 25        | 37   | 76             | mA   |
|                       |                                   | 24-MHz                           | $V_{OL} = 1.5\text{V}$  | 25        | 37   | 76             | mA   |
| $I_{OH}$              | Output High Current               | CPU1:3                           | $V_{OH} = 1.25\text{V}$ | 25        | 55   | 97             | mA   |
|                       |                                   | PCI_F, PCI1:8                    | $V_{OH} = 1.5\text{V}$  | 31        | 55   | 139            | mA   |
|                       |                                   | AGP0:2                           | $V_{OH} = 1.25\text{V}$ | 40        | 85   | 140            | mA   |
|                       |                                   | APIC0:1                          | $V_{OH} = 1.5\text{V}$  | 27        | 44   | 94             | mA   |
|                       |                                   | 48-MHz                           | $V_{OH} = 1.5\text{V}$  | 27        | 44   | 94             | mA   |
|                       |                                   | 24-MHz                           | $V_{OH} = 1.5\text{V}$  | 25        | 37   | 76             | mA   |

**Notes:**

2. Multiple Supplies: The voltage on any input or I/O pin cannot exceed the power pin during power-up. Power supply sequencing is NOT required.
3. All clock outputs loaded with 6" 60Ω transmission lines with 22-pF capacitors.
4. Inputs have internal pull-up resistors



SILICON LABS

W311

**DC Electrical Characteristics:**  $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}\pm5\%$  and  $2.5\text{V}\pm5\%$  (continued)

| Parameter                         | Description  | Test Condition         | Min. | Typ. | Max. | Unit |
|-----------------------------------|--|------------------------|------|------|------|------|
| <b>Crystal Oscillator</b>         |  |                        |      |      |      |      |
| $V_{TH}$                          | X1 Input Threshold Voltage <sup>[5]</sup>                    | $V_{DD} = 3.3\text{V}$ | —    | 1.65 | —    | V    |
| $C_{LOAD}$                        | Load Capacitance, Imposed on External Crystal <sup>[6]</sup> |                        | —    | 18   | —    | pF   |
| $C_{IN,X1}$                       | X1 Input Capacitance <sup>[7]</sup>                          | Pin X2 unconnected     | —    | 28   | —    | pF   |
| <b>Pin Capacitance/Inductance</b> |  |                        |      |      |      |      |
| $C_{IN}$                          | Input Pin Capacitance  | Except X1 and X2       | —    | —    | 5    | pF   |
| $C_{OUT}$                         | Output Pin Capacitance                                       |                        | —    | —    | 6    | pF   |
| $L_{IN}$                          | Input Pin Inductance   |                        | —    | —    | 7    | nH   |

**AC Electrical Characteristics** $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}\pm5\%$ ,  $V_{DD} = 2.5\text{V}\pm5\%$ ,  $f_{XTL} = 14.31818\text{ MHz}$ 

AC clock parameters are tested and guaranteed over stated operating conditions using the stated lump capacitive load at the clock output; Spread Spectrum is disabled.

**CPU Clock Outputs (Lump Capacitance Test Load = 20 pF)**

| Parameter | Description  | Test Condition /Comments  | CPU = 66.6 MHz |      |      | CPU = 100 MHz |      |      | CPU = 133 MHz |      |      | Unit     |
|-----------|--|---|----------------|------|------|---------------|------|------|---------------|------|------|----------|
|           |  |   | Min.           | Typ. | Max. | Min.          | Typ. | Max. | Min.          | Typ. | Max. |          |
| $t_P$     | Period   | Measured on rising edge at 1.25   | 15             | —    | 15.5 | 10            | —    | 10.5 | 7.5           | —    | 8.0  | ns       |
| $t_H$     | High Time  | Duration of clock cycle above 2.0V  | 5.2            | —    | —    | 3.0           | —    | —    | 1.87          | —    | —    | ns       |
| $t_L$     | Low Time   | Duration of clock cycle below 0.4V  | 5.0            | —    | —    | 2.8           | —    | —    | 1.67          | —    | —    | ns       |
| $t_R$     | Output Rise Edge Rate                              | Measured from 0.4V to 2.0V  | 1              | —    | 4    | 1             | —    | 4    | 1             | —    | 4    | V/ns     |
| $t_F$     | Output Fall Edge Rate                              | Measured from 2.0V to 0.4V  | 1              | —    | 4    | 1             | —    | 4    | 1             | —    | 4    | V/ns     |
| $t_D$     | Duty Cycle   | Measured on rising and falling edge at 1.25V  | 45             | —    | 55   | 45            | —    | 55   | 45            | —    | 55   | %        |
| $t_{JC}$  | Jitter, Cycle-to-Cycle                             | Measured on rising edge at 1.25V. Maximum difference of cycle time between two adjacent cycles.                     | —              | —    | 250  | —             | —    | 250  | —             | —    | 250  | ps       |
| $t_{SK}$  | Output Skew  | Measured on rising edge at 1.25V  | —              | —    | 175  | —             | —    | 175  | —             | —    | 175  | ps       |
| $f_{ST}$  | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —              | —    | 3    | —             | —    | 3    | —             | —    | 3    | ms       |
| $Z_o$     | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —              | 20   | —    | —             | 20   | —    | —             | 20   | —    | $\Omega$ |

**Notes:**

5. X1 input threshold voltage (typical) is 3.3V/2
6. The W311 contains an internal crystal load capacitor between pin X1 and ground and another between pin X2 and ground. Total load placed on crystal is 18 pF; this includes typical stray capacitance of short PCB traces to crystal.
7. X1 input capacitance is applicable when driving X1 with an external clock source (X2 is left unconnected).

**PCI Clock Outputs (Lump Capacitance Test Load = 30 pF)**

| Parameter | Description  | Test Condition/Comments   | Min. | Typ. | Max. | Unit     |
|-----------|--|---|------|------|------|----------|
| $t_P$     | Period   | Measured on rising edge at 1.5V   | 30   | —    | —    | ns       |
| $t_H$     | High Time  | Duration of clock cycle above 2.4V  | 12   | —    | —    | ns       |
| $t_L$     | Low Time   | Duration of clock cycle below 0.4V  | 12   | —    | —    | ns       |
| $t_R$     | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 1    | —    | 4    | V/ns     |
| $t_F$     | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 1    | —    | 4    | V/ns     |
| $t_D$     | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   | —    | 55   | %        |
| $t_{JC}$  | Jitter, Cycle-to-Cycle                             | Measured on rising edge at 1.5V. Maximum difference of cycle time between two adjacent cycles.                      | —    | —    | 500  | ps       |
| $t_{SK}$  | Output Skew  | Measured on rising edge at 1.5V   | —    | —    | 500  | ps       |
| $t_O$     | CPU to PCI Clock Skew                              | Covers all CPU/PCI outputs. Measured on rising edge at 1.5V. CPU leads PCI output.                                  | 1.5  | —    | 4    | ns       |
| $f_{ST}$  | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —    | —    | 3    | ms       |
| $Z_o$     | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —    | 30   | —    | $\Omega$ |

**AGP Clock Outputs (Lump Capacitance Test Load = 30 pF)**

| Parameter | Description  | Test Condition/Comments   | Min. | Typ. | Max. | Unit     |
|-----------|--|---|------|------|------|----------|
| $t_P$     | Period   | Measured on rising edge at 1.5V   | 15   | —    | —    | ns       |
| $t_H$     | High Time  | Duration of clock cycle above 2.4V  | 5.25 | —    | —    | ns       |
| $t_L$     | Low Time   | Duration of clock cycle below 0.4V  | 5.05 | —    | —    | ns       |
| $t_R$     | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 1    | —    | 4    | V/ns     |
| $t_F$     | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 1    | —    | 4    | V/ns     |
| $t_D$     | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   | —    | 55   | %        |
| $t_{JC}$  | Jitter, Cycle-to-Cycle                             | Measured on rising edge at 1.5V. Maximum difference of cycle time between two adjacent cycles.                      | —    | —    | 500  | ps       |
| $t_{SK}$  | Output Skew  | Measured on rising edge at 1.5V   | —    | —    | 250  | ps       |
| $f_{ST}$  | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —    | —    | 3    | ms       |
| $Z_o$     | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —    | 30   | —    | $\Omega$ |

**APIC Clock Output (Lump Capacitance Test Load = 20 pF)**

| Parameter | Description  | Test Condition/Comments   | Min. | Typ.  | Max. | Unit     |
|-----------|--|---|------|-------|------|----------|
| $f$       | Frequency, Actual                                  | Frequency generated from PCI divided by 2   |      | PCI/2 |      | MHz      |
| $t_R$     | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 0.5  |       | 2    | V/ns     |
| $t_F$     | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 0.5  |       | 2    | V/ns     |
| $t_D$     | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   |       | 55   | %        |
| $f_{ST}$  | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. |      |       | 3    | ms       |
| $Z_o$     | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           |      | 40    |      | $\Omega$ |

**REF Clock Output (Lump Capacitance Test Load = 20 pF)**

| Parameter       | Description  | Test Condition/Comments   | Min. | Typ.   | Max. | Unit |
|-----------------|--|---|------|--------|------|------|
| f               | Frequency, Actual                                  | Frequency generated by crystal oscillator   |      | 14.318 |      | MHz  |
| t <sub>R</sub>  | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>F</sub>  | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>D</sub>  | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   | —      | 55   | %    |
| f <sub>ST</sub> | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —    | —      | 3    | ms   |
| Z <sub>o</sub>  | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —    | 40     | —    | Ω    |

**48-MHz Clock Output (Lump Capacitance Test Load = 20 pF)**


| Parameter       | Description  | Test Condition/Comments   | Min. | Typ.   | Max. | Unit |
|-----------------|--|---|------|--------|------|------|
| f               | Frequency, Actual                                  | Determined by PLL divider ratio (see m/n below)   |      | 48.008 |      | MHz  |
| f <sub>D</sub>  | Deviation from 48 MHz                              | (48.008 – 48)/48  |      | +167   |      | ppm  |
| m/n             | PLL Ratio  | (14.31818 MHz x 57/17 = 48.008 MHz)   |      | 57/17  |      |      |
| t <sub>R</sub>  | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>F</sub>  | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>D</sub>  | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   | —      | 55   | %    |
| f <sub>ST</sub> | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —    | —      | 3    | ms   |
| Z <sub>o</sub>  | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —    | 40     | —    | Ω    |

**24-MHz Clock Output (Lump Capacitance Test Load = 20 pF)**

| Parameter       | Description  | Test Condition/Comments   | Min. | Typ.   | Max. | Unit |
|-----------------|--|---|------|--------|------|------|
| f               | Frequency, Actual                                  | Determined by PLL divider ratio (see m/n below)   |      | 24.004 |      | MHz  |
| f <sub>D</sub>  | Deviation from 24 MHz                              | (24.004 – 24)/24  |      | +167   |      | ppm  |
| m/n             | PLL Ratio  | (14.31818 MHz x 57/34 = 24.004 MHz)   |      | 57/34  |      |      |
| t <sub>R</sub>  | Output Rise Edge Rate                              | Measured from 0.4V to 2.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>F</sub>  | Output Fall Edge Rate                              | Measured from 2.4V to 0.4V  | 0.5  | —      | 2    | V/ns |
| t <sub>D</sub>  | Duty Cycle   | Measured on rising and falling edge at 1.5V   | 45   | —      | 55   | %    |
| f <sub>ST</sub> | Frequency Stabilization from Power-up (cold start) | Assumes full supply voltage reached within 1 ms from power-up. Short cycles exist prior to frequency stabilization. | —    | —      | 3    | ms   |
| Z <sub>o</sub>  | AC Output Impedance                                | Average value during switching transition. Used for determining series termination value.                           | —    | 40     | —a   | Ω    |

**Ordering Information**

| Ordering Code    | Package Type                | Product Flow            |
|------------------|-----------------------------|-------------------------|
| W311H            | 48-pin SSOP                 | Commercial, 0°C to 70°C |
| W311HT           | 48-pin SSOP - Tape and Reel | Commercial, 0°C to 70°C |
| <b>Lead-free</b> |                             |                         |
| CYW311OXC        | 48-pin SSOP                 | Commercial, 0°C to 70°C |
| CYW311OXCT       | 48-pin SSOP - Tape and Reel | Commercial, 0°C to 70°C |

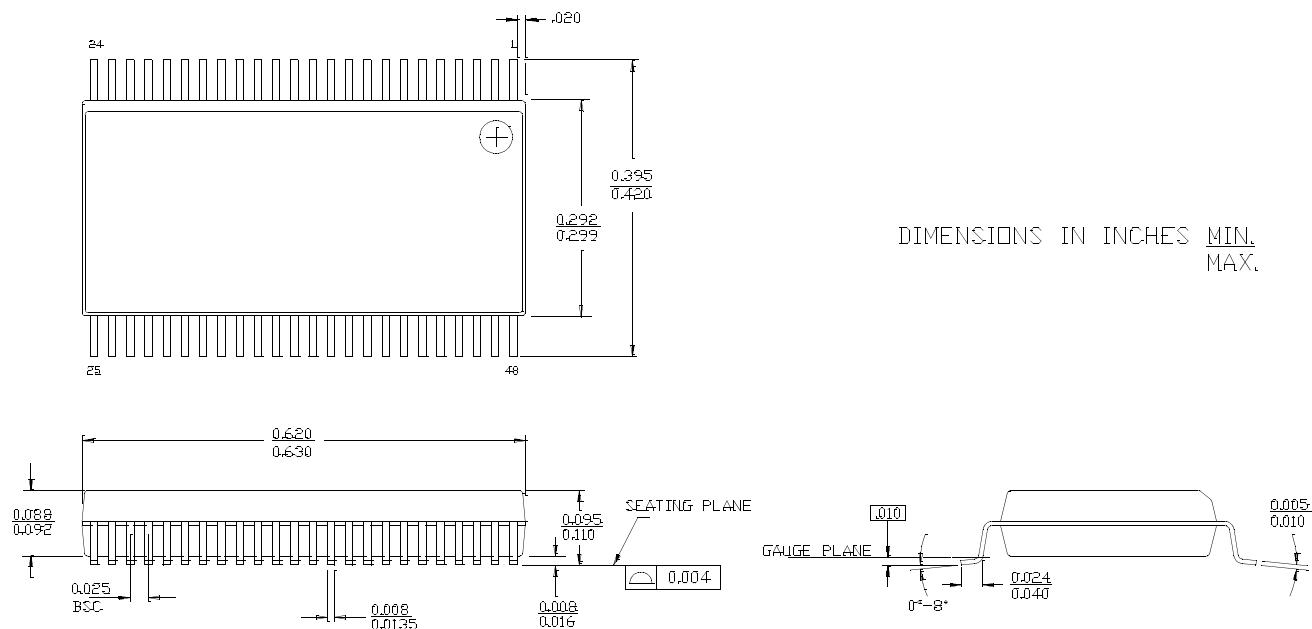**Package Drawing and Dimension**
**48-Lead Shrunk Small Outline Package O48**


**ClockBuilder Pro**

One-click access to Timing tools, documentation, software, source code libraries & more. Available for Windows and iOS (CBGo only).

[www.silabs.com/CBPro](http://www.silabs.com/CBPro)



**Timing Portfolio**  
[www.silabs.com/timing](http://www.silabs.com/timing)



**SW/HW**  
[www.silabs.com/CBPro](http://www.silabs.com/CBPro)



**Quality**  
[www.silabs.com/quality](http://www.silabs.com/quality)



**Support and Community**  
[community.silabs.com](http://community.silabs.com)

#### Disclaimer

Silicon Laboratories intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Laboratories products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Laboratories reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Laboratories shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any Life Support System without the specific written consent of Silicon Laboratories. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Laboratories products are not designed or authorized for military applications. Silicon Laboratories products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

#### Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, Clockbuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, ISOModem®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress® and others are trademarks or registered trademarks of Silicon Laboratories Inc. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



**Silicon Laboratories Inc.**  
400 West Cesar Chavez  
Austin, TX 78701  
USA

<http://www.silabs.com>