

Silicon Schottky Diodes

- Low barrier type for DBS mixer applications up to 12 GHz, phase detectors and modulators
- Low noise figure
- Pb-free (RoHS compliant) package



BAT15-02LRH
BAT15-03W



BAT15-04W



BAT15-05W



BAT15-099
BAT15-099LRH



BAT15-099R



ESD (Electrostatic discharge) sensitive device, observe handling precaution!

Type	Package	Configuration	L_S (nH)	Marking
BAT15-02LRH	TSLP-2-7	single, leadless	0.4	NP
BAT15-03W	SOD323	single	1.8	white P
BAT15-04W	SOT323	series	1.4	S8s
BAT15-05W	SOT323	common cathode	1.4	S5s
BAT15-07LRH	TSLP-4-7	parallel pair, leadless	0.4	NP
BAT15-098LRH	TSLP-4-7	anti-parallel pair, leadless	0.4	B
BAT15-099	SOT143	anti-parallel pair	2	S5s
BAT15-099R	SOT143	cross-over ring	2	S6s
BAT15-099LRH	TSLP-4-7	anti-parallel pair, leadless	0.4	S5

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	4	V
Forward current	I_F	110	mA
Total power dissipation	P_{tot}		mW
BAT15-02LRH, -099LRH $T_S \leq 76^\circ\text{C}$		100	
BAT15-03W, $T_S \leq 70^\circ\text{C}$		100	
BAT15-04W, $T_S \leq 68^\circ\text{C}$		100	
BAT15-05W, $T_S \leq 65^\circ\text{C}$		100	
BAT15-099, $T_S \leq 48^\circ\text{C}$		100	
BAT15-099R, $T_S \leq 67^\circ\text{C}$		100	
Junction temperature	T_j	150	$^\circ\text{C}$
Operating temperature range	T_{op}	-55 ... 150	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BAT15-02LRH, -099LRH		≤ 780	
BAT15-03W		≤ 795	
BAT15-04W		≤ 820	
BAT15-05W		≤ 850	
BAT15-099		≤ 1020	
BAT15-099R		≤ 830	

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Breakdown voltage $I_{(BR)} = 100\ \mu\text{A}$	$V_{(BR)}$	4	-	-	V
Forward voltage $I_F = 1\ \text{mA}$ $I_F = 10\ \text{mA}$	V_F	0.16 0.25	0.23 0.32	0.32 0.41	
Forward voltage matching ¹⁾ $I_F = 10\ \text{mA}$	ΔV_F	-	-	20	
AC Characteristics					
Diode capacitance $V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$, all other types $V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$, BAT15-099R	C_T	- -	- -	0.35 0.5	pF
Differential forward resistance $I_F = 10\ \text{mA} / 50\ \text{mA}$	R_F	-	5.5	-	

¹⁾ ΔV_F is the difference between lowest and highest V_F in a multiple diode component.

Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$



Reverse current $I_R = f(V_R)$

$T_A = \text{Parameter}$



Forward current $I_F = f(V_F)$

$T_A = \text{Parameter}$




Forward current $I_F = f(T_S)$

BAT15-02LRH, BAT15-099LRH




Forward current $I_F = f(T_S)$

BAT15-03W

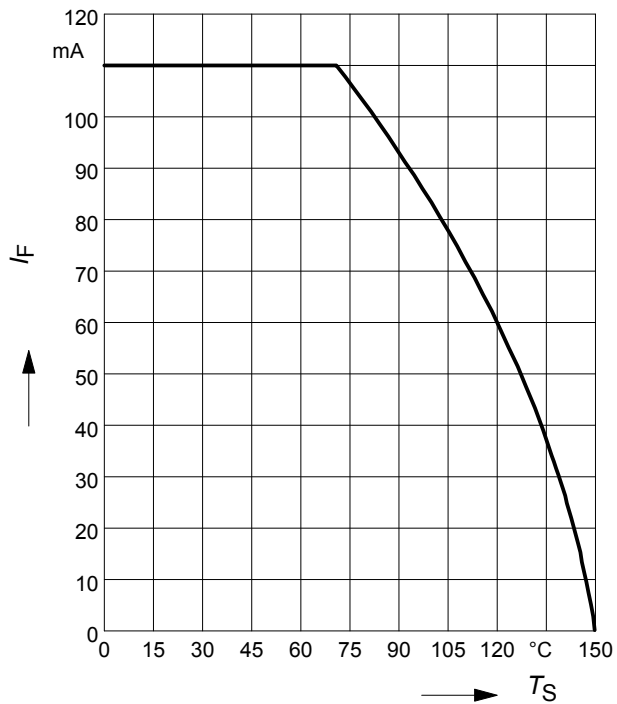


Forward current $I_F = f(T_S)$

BAT15-04W

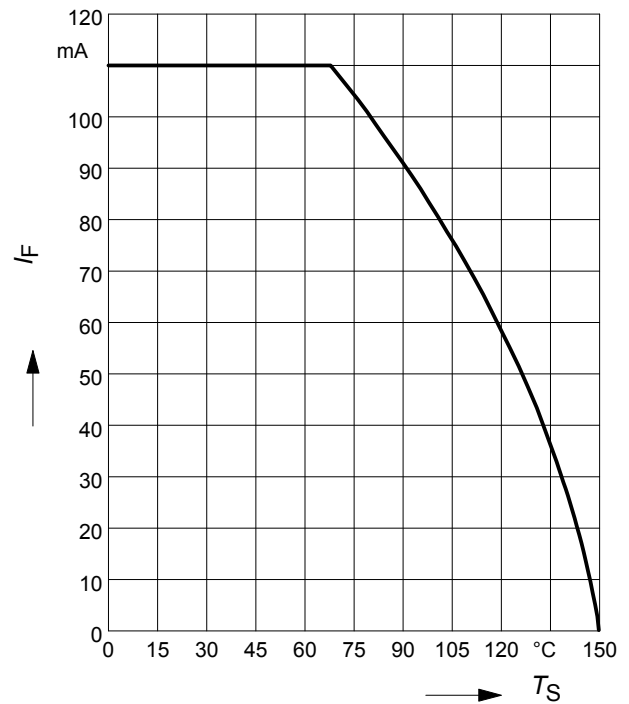


Forward current $I_F = f(T_S)$

BAT15-05W

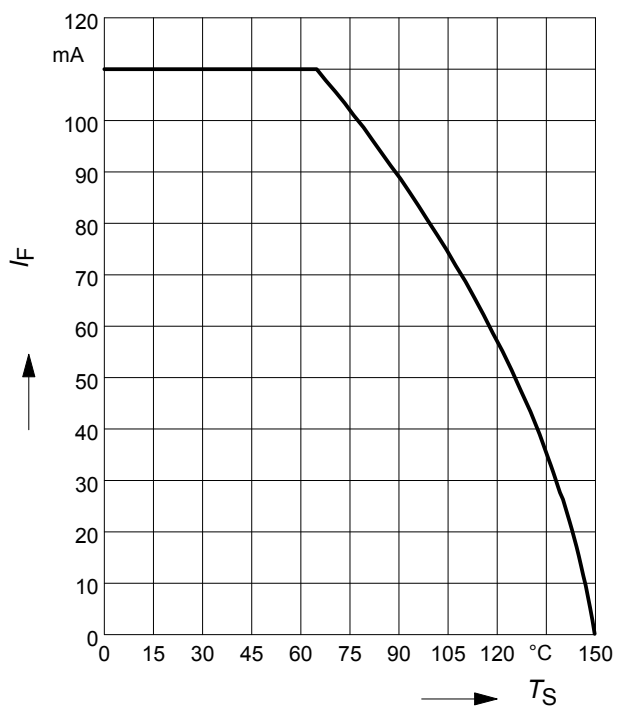


Forward current $I_F = f(T_S)$

BAT15-099

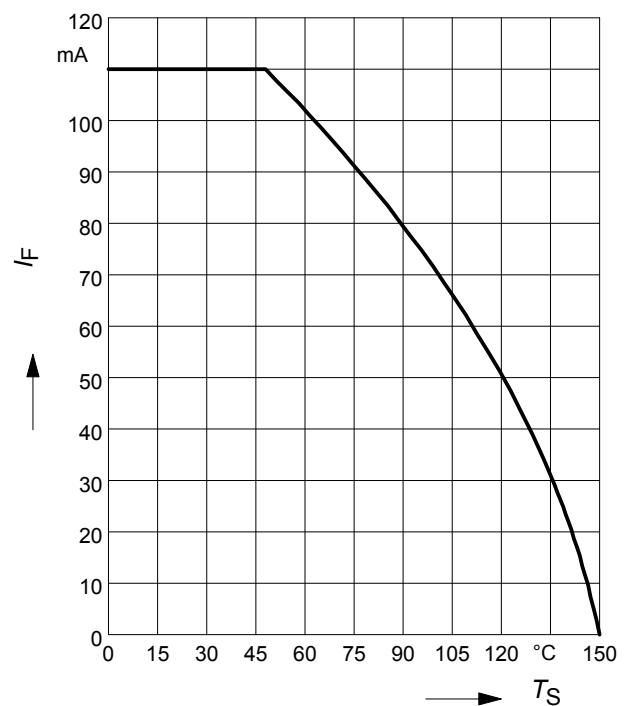


Forward current $I_F = f(T_S)$

BAT15-099R

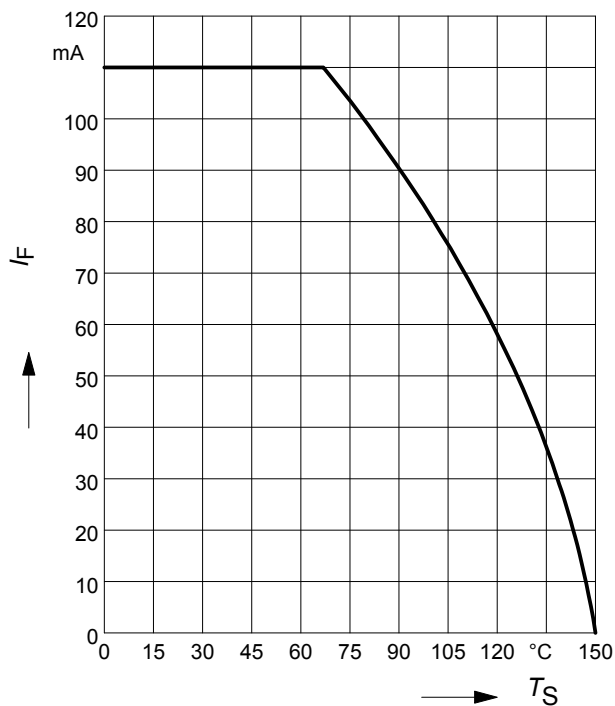

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT15-02LRH, BAT15-099LRH

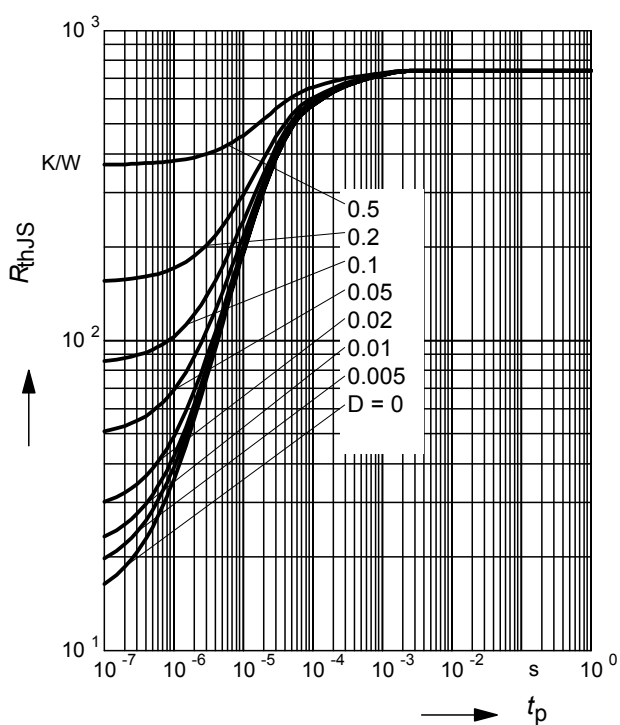

Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$ BAT15-02LRH,

BAT15-099LRH

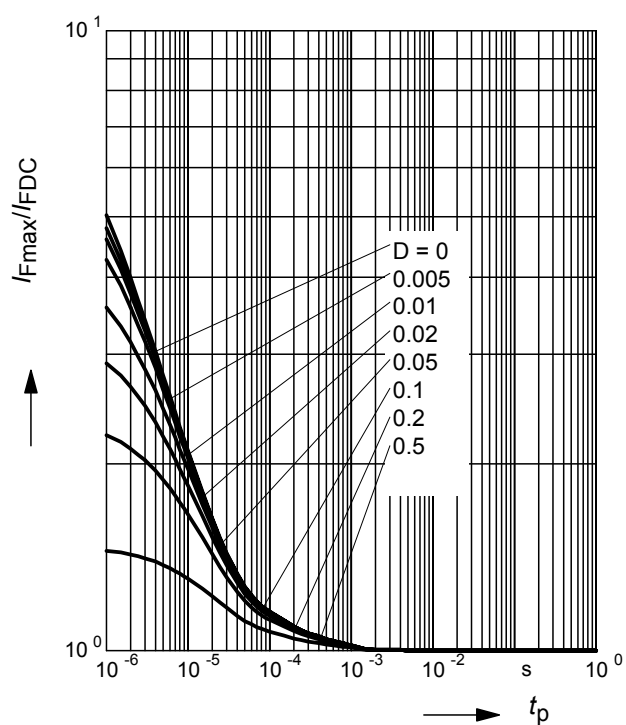

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT15-03W

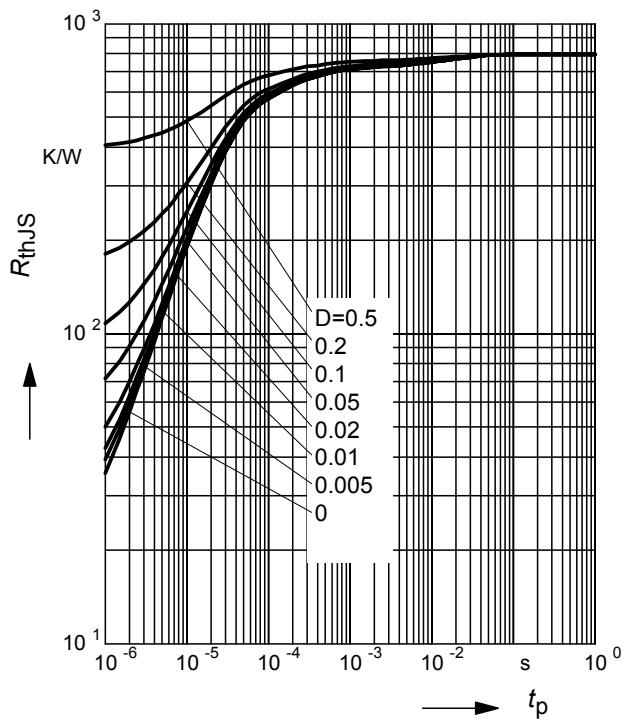

Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT15-03W

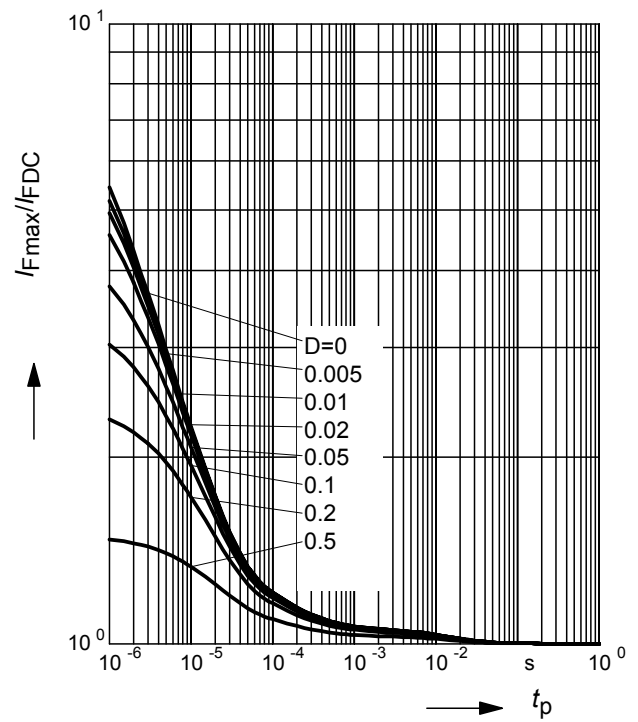

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT15-04W



Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT15-04W

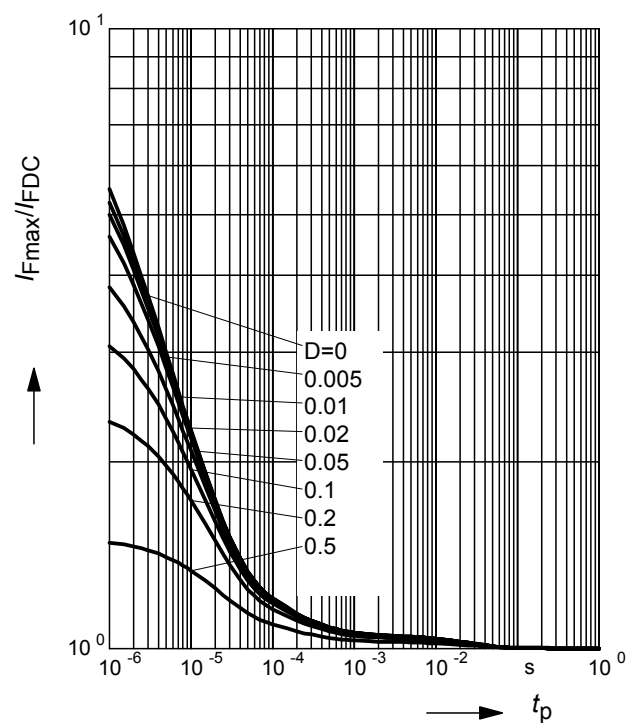

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT15-05W

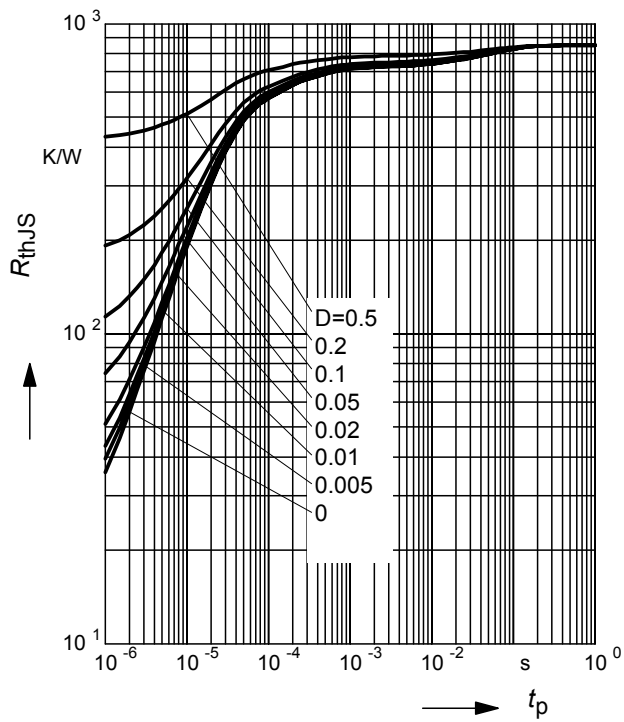

Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT15-05W

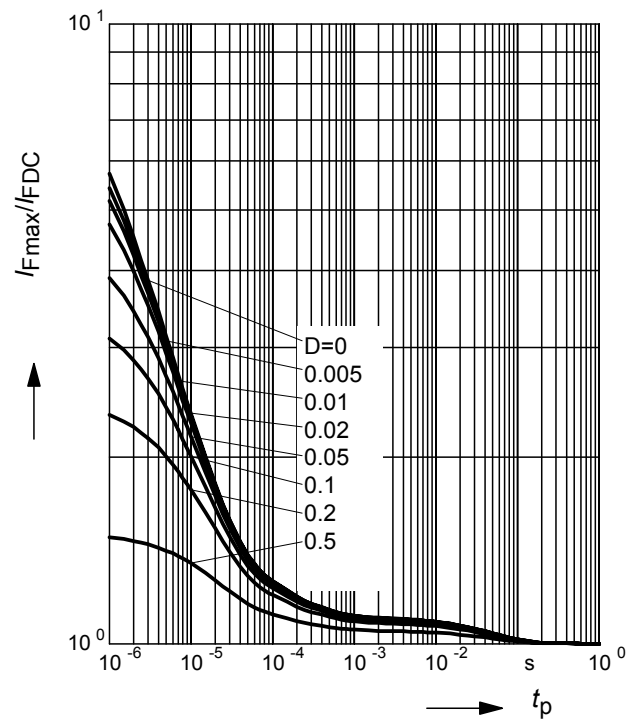

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT15-099



Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT15-099

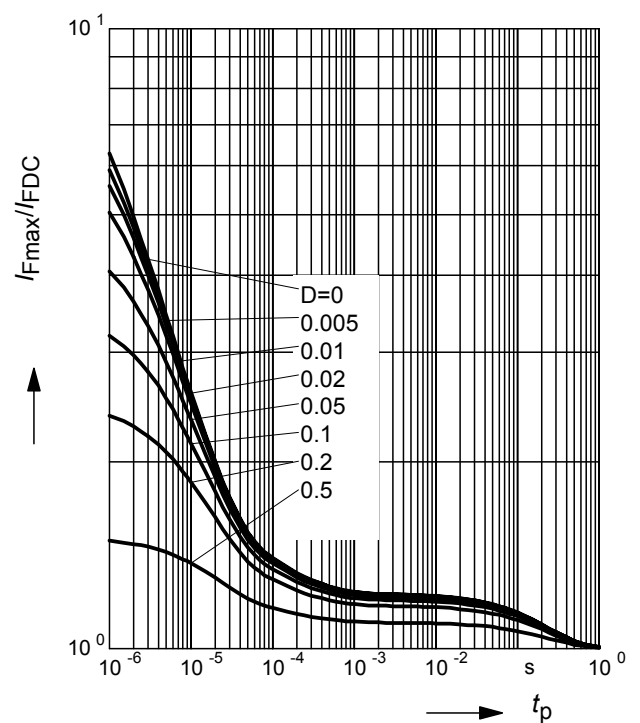

Permissible Puls Load $R_{thJS} = f(t_p)$

BAT15-099R



Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT15-099R




S₁₁-Parameters for BAT15-099

Typical impedance characteristics (with external bias I and $Z_0 = 50\Omega$)

f	$I = 0.02 \text{ mA}$		$I = 0.05 \text{ mA}$		$I = 0.1 \text{ mA}$		$I = 0.2 \text{ mA}$		$I = 0.5 \text{ mA}$	
GHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1	0.94	-16.4	0.84	-16.6	0.77	-16.4	0.59	-17.2	0.19	-16.7
2	0.93	-33.8	0.88	-33.8	0.77	-34.5	0.58	-35.2	0.15	-36.1
3	0.92	-53.8	0.86	-54.5	0.75	-54.1	0.58	-56.1	0.13	-64.8
4	0.91	-74.3	0.84	-75.3	0.72	-76.4	0.51	-78.4	0.11	-104.8
5	0.91	-96.6	0.84	-97.6	0.72	-99.1	0.53	-102.3	0.15	-135.7
6	0.91	-115.4	0.84	-116.7	0.73	-118.7	0.53	-122.9	0.18	-160.9
7	0.91	-131	0.84	-132.3	0.73	-134.1	0.54	-138.1	0.2	-168.8
8	0.91	-143	0.84	-144.5	0.73	-146.8	0.55	-150.5	0.81	179.4
9	0.91	-155.6	0.83	-150.2	0.71	-159.7	0.53	-163.9	0.18	179.4
10	0.9	-167.3	0.83	-169.7	0.71	-178.8	0.51	-175.8	0.14	151.2
11	0.89	175.5	0.8	172.6	0.7	170	0.45	164.9	0.09	105.5
12	0.88	175.5	0.76	146.5	0.62	142.8	0.39	134.2	0.14	43.6

S₁₁ = (f, I) BAT15-099

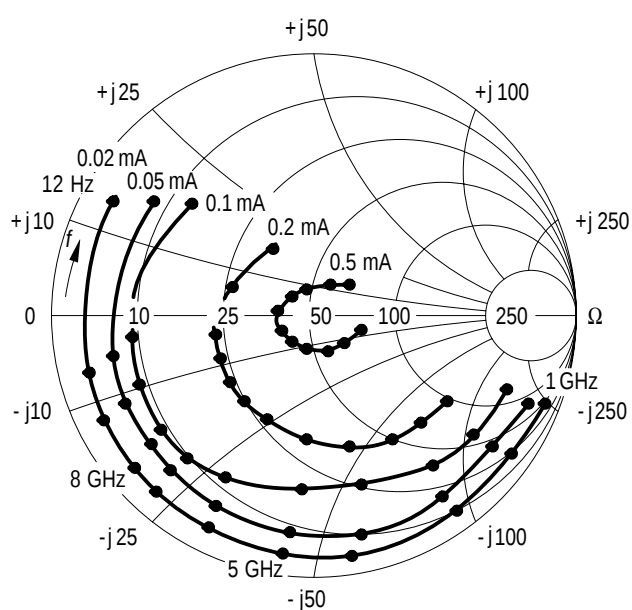

EHD07083

Technical drawing of the 025A tube pin, showing dimensions in millimeters (mm) and tolerances.

Top View:

- Overall width: 2.5 ± 0.2
- Overall height: 2.5 ± 0.2
- Central pin diameter: $0.25 \text{ (M)} \text{ A}$
- Pin height: 1.7 ± 0.2
- Base width: 1.25 ± 0.2
- Base depth: 0.3 ± 0.1
- Cathode marking: Indicated by a shaded area on the base.

Side View:

- Base height: 0.45 ± 0.15
- Pin height: 1.7 ± 0.2
- Pin diameter at base: 0.3 ± 0.1
- Pin diameter at top: 0.9 ± 0.2
- Base width: 1.25 ± 0.2
- Base depth: 0.3 ± 0.1
- Pin diameter at base: 0.3 ± 0.1
- Pin diameter at top: 0.9 ± 0.2


Technical drawing of a stepped shaft. The shaft has a total length of 1.7. It consists of a left section with a diameter of 0.6 and a length of 0.8, and a right section with a diameter of 0.8 and a length of 0.8. A centerline is shown with a dashed line and arrows at both ends.

BAR63-03W
Type code


Cathode marking
Color ink or laser marking

Technical drawing of a cathode marking. The drawing shows a side view and a cross-section. The side view has dimensions: 4 (width of the marking area), 8 (total height), 2 (height of the marking area), 2.9 (height of the marking area), 0.65 (width of the marking area), and 1.35 (width of the marking area). The cross-section shows a height of 0.2. A label 'Cathode marking' points to the marking area.

Package Outline

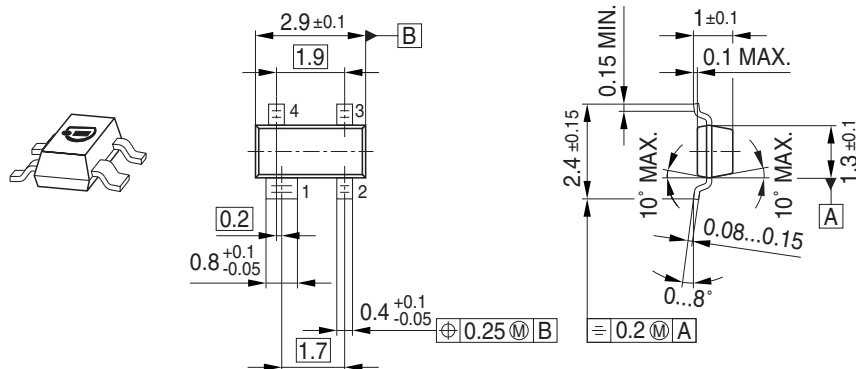

Foot Print




Marking Layout (Example)




Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

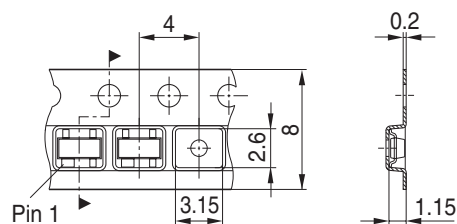


Package Outline

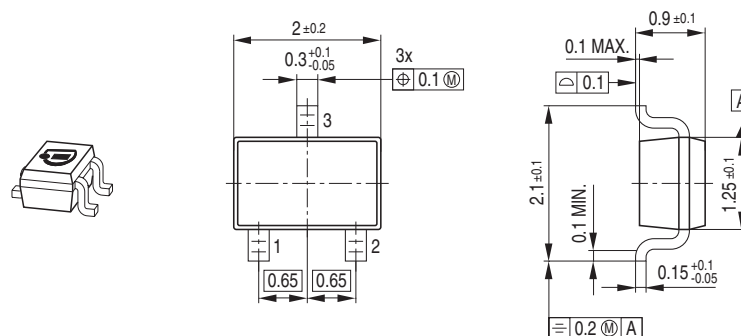

Foot Print



Marking Layout (Example)

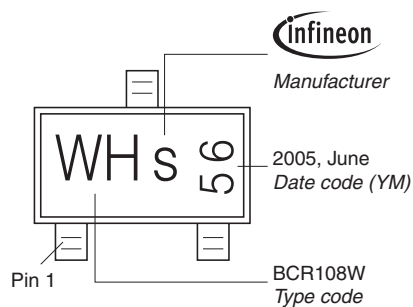


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
 Reel ø330 mm = 10.000 Pieces/Reel




Package Outline

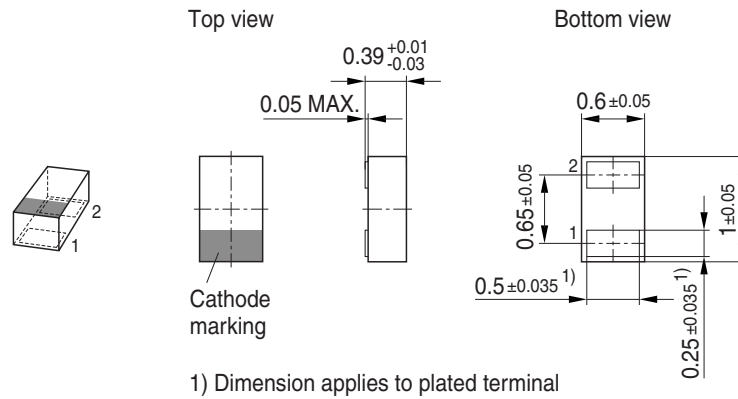


Foot Print

For board assembly information please refer to Infineon website "Packages"

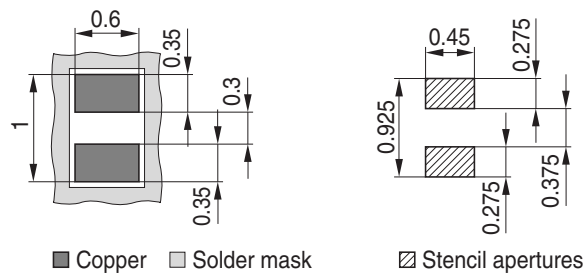


Marking Layout (Example)

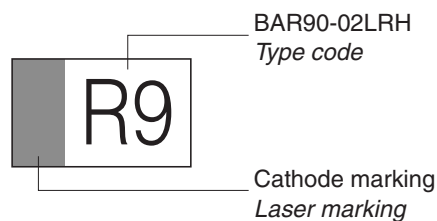

Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

Reel ø330 mm = 50.000 Pieces/Reel (optional)

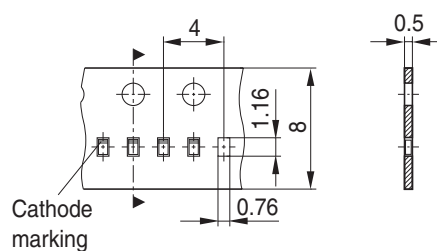

Technical drawing of a 2x2 grid of holes. The drawing includes the following dimensions and labels:

- Top horizontal dimension: 0.8 ± 0.05
- Left horizontal dimension: $4 \times 0.25 \pm 0.035$
- Right vertical dimension: $4 \times 0.35 \pm 0.035$
- Bottom horizontal dimension: 0.45 ± 0.05
- Left vertical dimension: 0.75 ± 0.05
- Right vertical dimension: 1.2 ± 0.05
- Labels: 1, 2, 3, 4 (positioning points), 1) (feature identifier)

 Stencil apertures

Diagram illustrating the pin 1 marking and type code for the connector:

- Pin 1 marking:** A small circle on the left side of the connector housing, labeled "Pin 1 marking".
- Type code:** The letter "T" inside the connector housing, labeled "Type code".
- Label:** The text "BAR90-07LRH" is shown above the connector housing.

Technical drawing of a mechanical part. The main view shows a rectangular part with a width of 8 and a total length of 1.05. There are four circular features (holes) along the top edge, with a center-to-center distance of 4 between the first two. The distance from the right edge to the center of the last hole is 1.45. A label 'Pin 1 marking' points to the first hole. A cross-section view on the right shows a rectangular profile with a width of 0.5 and a hatched area indicating a specific material or feature.

Edition 2009-11-16

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.