

MC79LXXA/LM79LXXA


3-Terminal 0.1A Negative Voltage Regulator

Features


- Output Current up to 100mA
- No External Components
- Internal Thermal Over Load Protection
- Internal Short Circuit Current Limiting
- Output Voltage Offered in $\pm 5\%$ Tolerance
- Output Voltage of -5V, -8V, -12V, -15V, -18V, -24V

Description

These regulators employ internal current limiting and thermal shutdown, making them essentially indestructible.

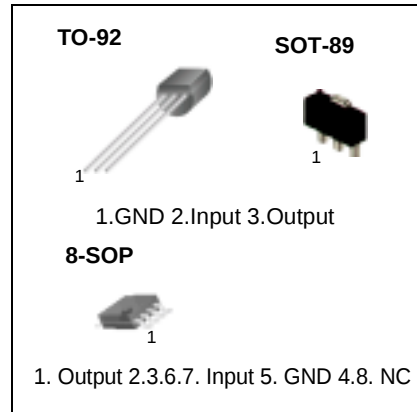

Internal Block Diagram

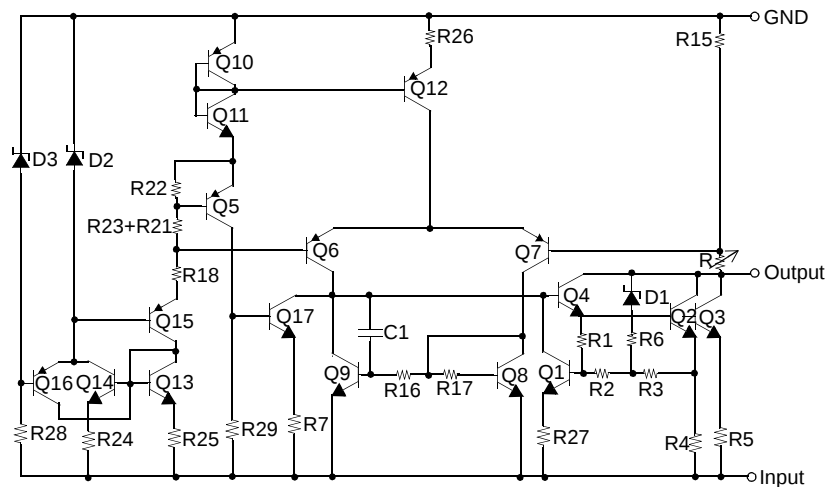

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage (for $V_O = -5V$ to $-8V$) (for $V_O = -12V$ to $-18V$) (for $V_O = -24V$)	V_I	-30 -35 -40	V
Operating Temperature Range	T_{OPR}	0 ~ +125	°C
Storage Temperature Range	T_{STG}	-65 ~ +150	°C

Electrical Characteristics(MC79L05A/LM79L05A)

($V_I = -10V$, $I_O = 40mA$, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $0^\circ C \leq T_J \leq +125^\circ C$, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V_O	$T_J = +25^\circ C$	-4.8	-5.0	-5.2	V
Line Regulation (Note1)		ΔV_O	$T_J = +25^\circ C$	-	15	150	mV
			$-7.0V \geq V_I \geq -20V$	-	-	100	mV
Load Regulation (Note1)		ΔV_O	$T_J = +25^\circ C$	-	20	60	mV
			$1.0mA \leq I_O \leq 40mA$	-	10	30	mV
Output Voltage		V_O	$-7.0V \geq V_I \geq -20V$, $1.0mA \leq I_O \leq 40mA$	-4.75	-	-5.25	V
			$V_I = -10V$, $1.0mA \leq I_O \leq 70mA$	-4.75	-	-5.25	V
Quiescent Current		I_Q	$T_J = +25^\circ C$	-	2.0	5.5	mA
			$T_J = +125^\circ C$	-	-	6.0	
Quiescent Current Change	With Line	ΔI_Q	$-8V \geq V_I \geq -20V$	-	-	1.5	mA
	With Load	ΔI_Q	$1.0mA \leq I_O \leq 40mA$	-	-	0.1	mA
Output Noise Voltage		V_N	$T_A = +25^\circ C$, $10Hz \leq f \leq 100kHz$	-	30	-	μV
Ripple Rejection		RR	$f = 120Hz$, $-8V \geq V_I \geq -18V$ $T_J = +25^\circ C$	41	60	-	dB
Dropout Voltage		V_D	$T_J = +25^\circ C$	-	1.7	-	V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (MC79L08A) (Continued)(V_I = -14V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF, 0°C ≤ T_J ≤ +125°C, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V _O	T _J = +25°C	-7.7	-8.0	-8.3	V
Line Regulation(Note1)		ΔV _O	T _J = +25°C	-10.3V ≥ V _I ≥ -23V	-	-	175 mV
				-12V ≥ V _I ≥ -23V	-	-	125 mV
Load Regulation (Note1)		ΔV _O	T _J = +25°C	1.0mA ≤ I _O ≤ 100mA	-	-	80 mV
				1.0mA ≤ I _O ≤ 40mA	-	-	40 mV
Output Voltage		V _O	-10.3V ≥ V _I ≥ -23V, 1.0mA ≤ I _O ≤ 40mA		-7.6	-	-8.4 V
			V _I = -14V, 1.0mA ≤ I _O ≤ 70mA		-7.6	-	-8.4
Quiescent Current		I _q	T _J = +25°C		-	-	6.0 mA
			T _J = +125°C		-	-	5.5
Quiescent Current Change	With Line	ΔI _Q	-11.7V ≥ V _I ≥ -23V		-	-	1.5 mA
	With Load		1.0mA ≤ I _O ≤ 40mA		-	-	0.1 mA
Output Noise Voltage		V _N	T _J = +25°C, 10Hz ≤ f ≤ 100kHz		-	50	- μV
Ripple Rejection		RR	f = 120Hz, -11V ≥ V _I ≥ -21V T _J = +25°C		39	55	- dB
Dropout Voltage		V _D	T _J = +25°C		-	1.7	- V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics(MC79L12A) (Continued)(V_I = -19V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF, 0°C ≤ T_J ≤ +125°C, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V _O	T _J = +25°C	-11.5	-12.0	-12.5	V
Line Regulation (Note1)		ΔV _O	T _J = +25°C	-14.5V ≥ V _I ≥ -27V	-	-	250 mV
				-16V ≥ V _I ≥ -27V	-	-	200 mV
Load Regulation (Note1)		ΔV _O	T _J = +25°C	1.0mA ≤ I _O ≤ 100mA	-	-	100 mV
				1.0mA ≤ I _O ≤ 40mA	-	-	50 mV
Output Voltage		V _O	-14.5V > V _I > -27V, 1.0mA ≤ I _O ≤ 40mA	-11.4	-	-12.6	V
			V _I = -19V, 1.0mA ≤ I _O ≤ 70mA	-11.4	-	-12.6	V
Quiescent Current		I _Q	T _J = +25°C	-	-	6.0	mA
			T _J = +125°C	-	-	6.5	
Quiescent Current Change	With Line	ΔI _Q	-16V ≥ V _I ≥ -27V	-	-	1.5	mA
	With Load	ΔI _Q	1.0mA ≤ I _O ≤ 40mA	-	-	0.1	mA
Output Noise Voltage		V _N	T _A = +25°C, 10Hz ≤ f ≤ 100kHz	-	80	-	μV
Ripple Rejection		RR	f = 120Hz, -15V ≥ V _I ≥ -25V T _J = +25°C	37	42	-	dB
Dropout Voltage		V _D	T _J = +25°C	-	1.7	-	V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics(MC79L15A) (Continued)(V_I = -23V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF, 0°C ≤ T_J ≤ +125°C, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V _O	T _J = +25°C	-14.4	-15.0	-15.6	V
Line Regulation (Note1)		ΔV _O	T _J = +25°C	-17.5V ≥ V _I ≥ -30V	-	-	300 mV
				-20V ≥ V _I ≥ -30V	-	-	250 mV
Load Regulation (Note1)		ΔV _O	T _J = +25°C	1.0mA ≤ I _O ≤ 100mA	-	-	150 mV
				1.0mA ≤ I _O ≤ 40mA	-	-	75 mV
Output Voltage		V _O	-17.5V ≥ V _I ≥ -30V, 1.0mA ≤ I _O ≤ 40mA	-14.25	-	-15.75	V
			V _I = -23V, 1.0mA ≤ I _O ≤ 70mA	-14.25	-	-15.75	V
Quiescent Current		I _Q	T _J = +25°C	-	-	6.0	mA
			T _J = +125°C	-	-	6.5	
Quiescent Current Change	With Line	ΔI _Q	-20V ≥ V _I ≥ -30V	-	-	1.5	mA
	With Load	ΔI _Q	1.0mA ≤ I _O ≤ 40mA	-	-	0.1	
Output Noise Voltage		V _N	T _A = +25°C, 10Hz ≤ f ≤ 100kHz	-	90	-	μV
Ripple Rejection		RR	f = 120Hz, -18.5V ≥ V _I ≥ -28.5V T _J = +25°C	34	39	-	dB
Dropout Voltage		V _D	T _J = +25°C	-	1.7	-	V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics(MC79L18A) (Continued)(V_I = -27V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF, 0°C ≤ T_J ≤ +125°C, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V _O	T _J = +25°C	-17.3	-18.0	-18.7	V
Line Regulation (Note1)		ΔV _O	T _J = +25°C	-20.7V ≥ V _I ≥ -33V	-	-	325 mV
				-21V ≥ V _I ≥ -33V	-	-	275 mV
Load Regulation (Note1)		ΔV _O	T _J = +25°C	1.0mA ≤ I _O ≤ 100mA	-	-	170 mV
				1.0mA ≤ I _O ≤ 40mA	-	-	85 mV
Output Voltage		V _O	-20.7V > V _I > -33V, 1.0mA ≤ I _O ≤ 40mA	-17.1	-	-18.9	V
			V _I = -27V, 1.0mA ≤ I _O ≤ 70mA	-17.1	-	-18.9	V
Quiescent Current		I _Q	T _J = +25°C	-	-	6.5	mA
			T _J = +125°C	-	-	6.0	
Quiescent Current Change	With Line	ΔI _Q	-21V ≥ V _I ≥ -33V	-	-	1.5	mA
	With Load	ΔI _Q	1.0mA ≤ I _O ≤ 40mA	-	-	0.1	mA
Output Noise Voltage		V _N	T _A = +25°C, 10Hz ≤ f ≤ 100kHz	-	150	-	μV
Ripple Rejection		RR	f = 120Hz, -23V ≥ V _I ≥ -33V T _J = +25°C	33	48	-	dB
Dropout Voltage		V _D	T _J = +25°C	-	1.7	-	V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics(MC79L24A) (Continued)(V_I = -33V, I_O = 40mA, C_I = 0.33μF, C_O = 0.1μF, 0°C ≤ T_J ≤ +125°C, unless otherwise specified)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage		V _O	T _J = +25°C	-23	-24	-25	V
Line Regulation (Note1)		ΔV _O	T _J = +25°C	-27V ≥ V _I ≥ -38V	-	-	350 mV
				-28V ≥ V _I ≥ -38V	-	-	300 mV
Load Regulation (Note1)		ΔV _O	T _J = +25°C	1.0mA ≤ I _O ≤ 100mA	-	-	200 mV
				1.0mA ≤ I _O ≤ 40mA	-	-	100 mV
Output Voltage		V _O	-27V ≥ V _I ≥ -38V, 1.0mA ≤ I _O ≤ 40mA	-22.8	-	-25.2	V
			V _I = -33V, 1.0mA ≤ I _O ≤ 70mA	-22.8	-	-25.2	V
Quiescent Current		I _Q	T _J = +25°C	-	-	6.5	mA
			T _J = +125°C	-	-	6.0	
Quiescent Current Change	With Line	ΔI _Q	-28V ≥ V _I ≥ -38V	-	-	1.5	mA
	With Load	ΔI _Q	1.0mA ≤ I _O ≤ 40mA	-	-	0.1	mA
Output Noise Voltage		V _N	T _A = +25°C, 10Hz ≤ f ≤ 100kHz	-	200	-	μV
Ripple Rejection		RR	f = 120Hz, -29V ≥ V _I ≥ -35V T _J = +25°C	31	47	-	dB
Dropout Voltage		V _D	T _J = +25°C	-	1.7	-	V

Note:

1. Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Typical Application

Design Considerations

The MC79LXXA/LM79LXXA Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition. Internal Short Circuit Protection that limits the maximum current the circuit will pass. In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high frequency characteristics to insure stable operation under all load conditions. A $0.33\mu\text{F}$ or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulator's input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead. Bypassing the output is also recommended.

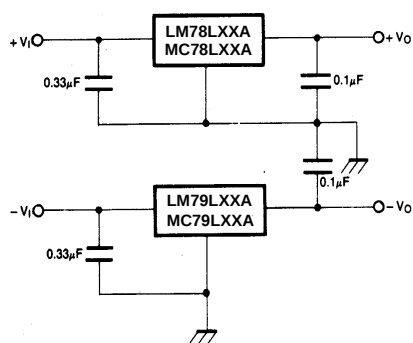


Figure 1. Positive And Negative Regulator

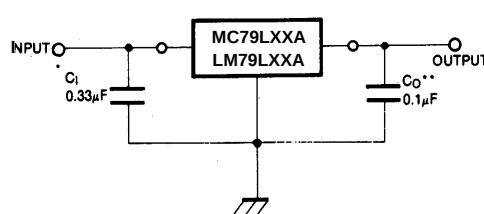


Figure 2. Typical Application

A common ground is required between the Input and the output voltages. The input voltage must remain typically 2.0V above the output voltage even during the low point on the input ripple voltage.

* C_1 is required if regulator is located an appreciable distance from power supply filter.


* C_0 improves stability and transient response.


Mechanical Dimensions

Package

Dimensions in millimeters

TO-92

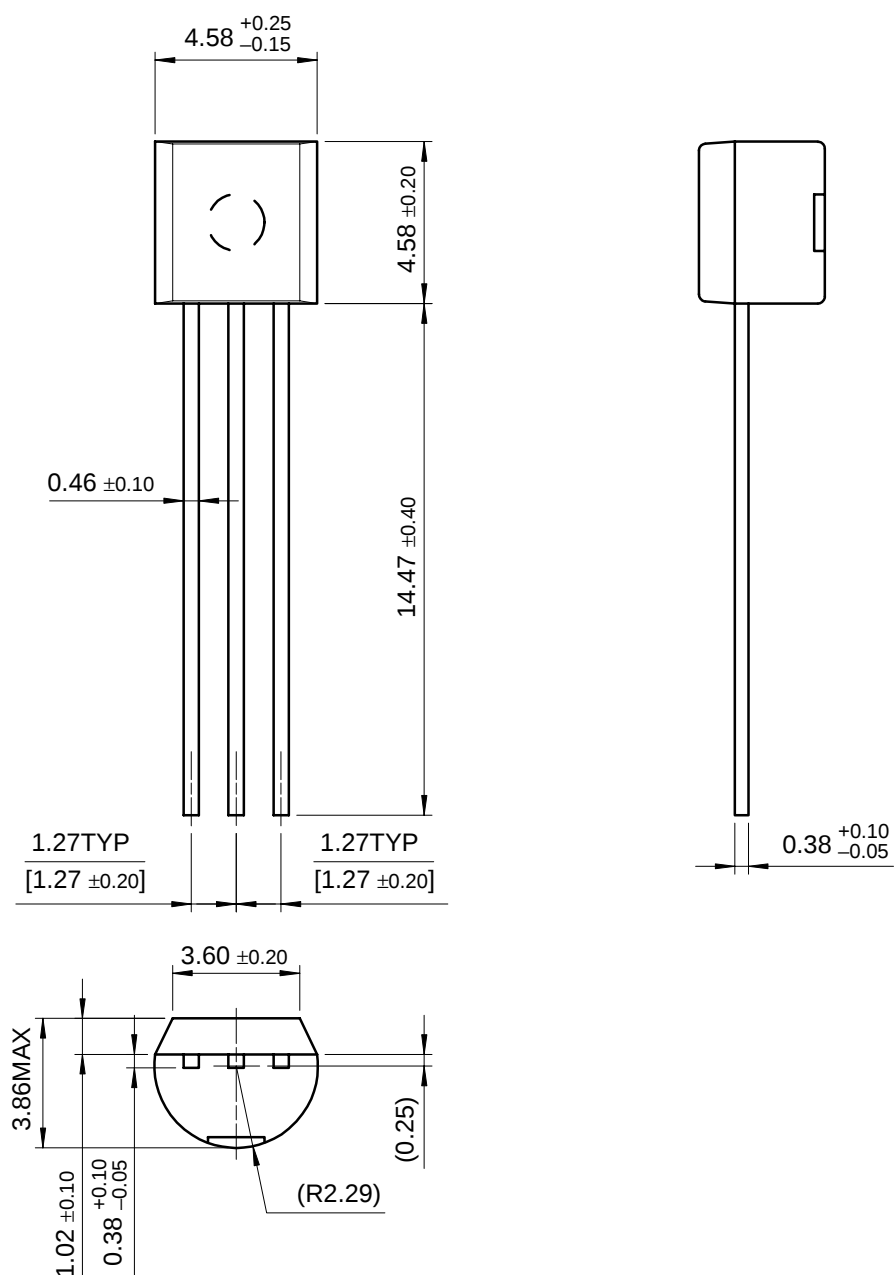

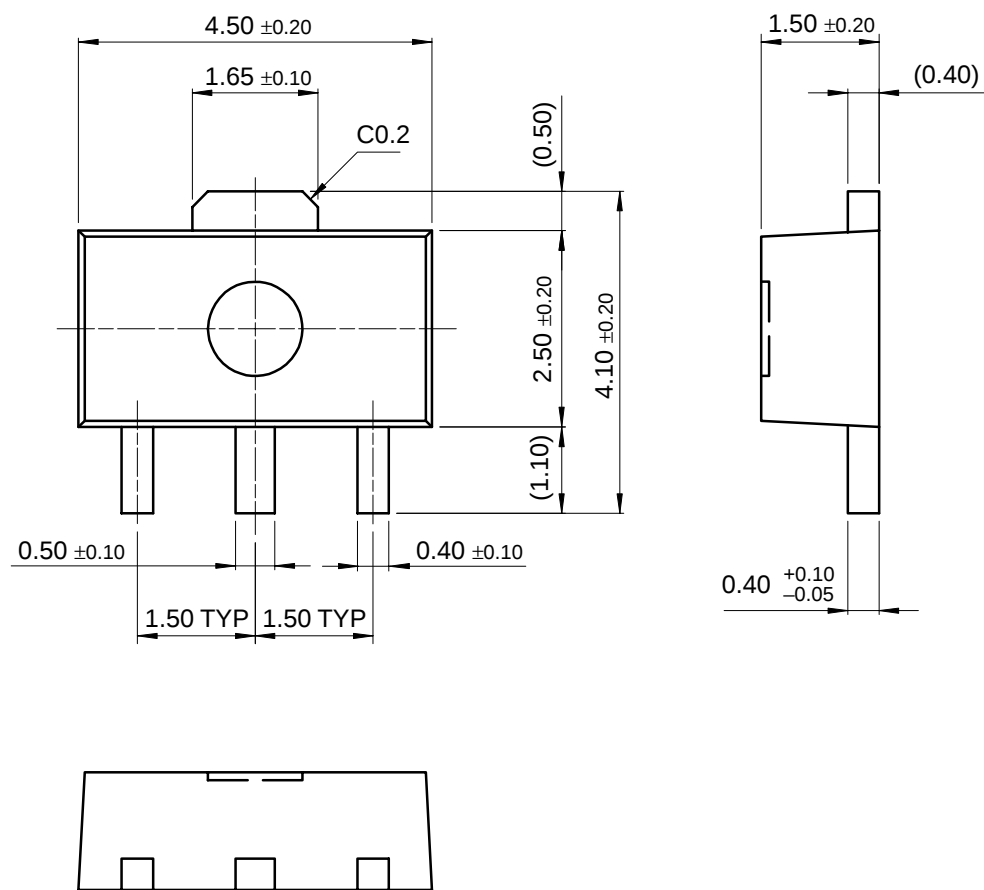Mechanical Dimensions (Continued)**Package****Dimensions in millimeters****SOT-89**

Ordering Information

Product Number	Package	Operating Temperature
LM79L05ACZ	TO-92	0 ~ +125°C
Product Number	Package	Operating Temperature
MC79L05ACP	TO-92	0 ~ +125°C
MC79L08ACP		
MC79L12ACP		
MC79L15ACP		
MC79L18ACP		
MC79L24ACP		
MC79L05ACD	8-SOP	
MC79L15ACD		
MC79L05ACH	SOT-89	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.