



4. PACKAGING:
A. TAPE & COVER
B. FIRST 10 POCKETS ARE LEFT EMPTY
C. 100 CONNECTORS PER

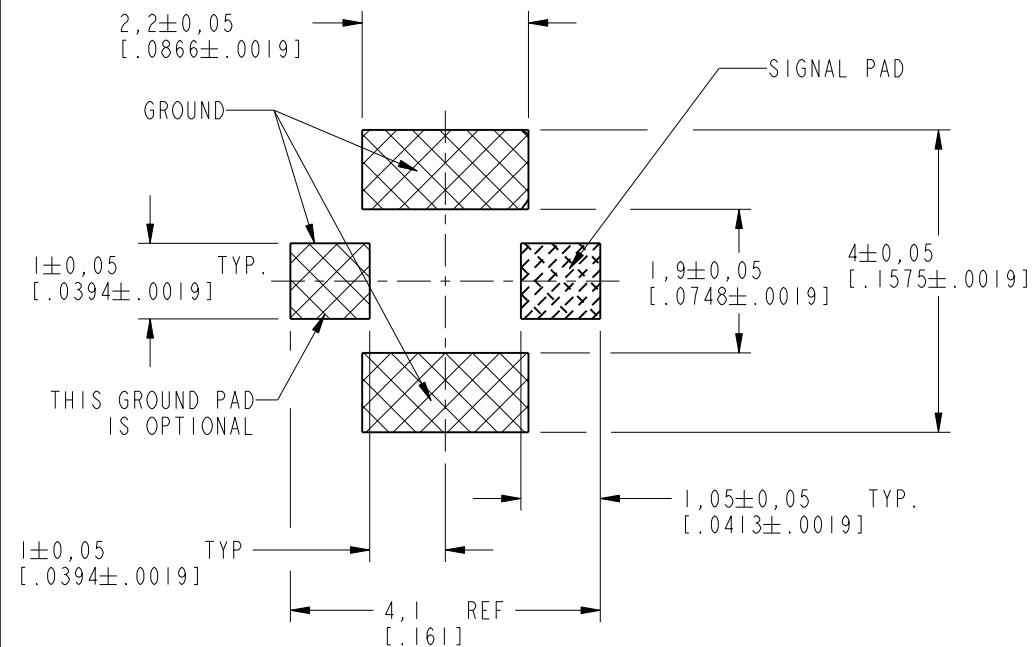

A-1JB-100		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	6/11/08	47102	CPM
	B	ADD ONE MORE VISUAL ORIENTATION FEATURE; UPDATE LOCATION OF VISUAL ORIENTATION FEATURES. 1.25 WAS 1.262 +0.20/-0.05; 2.2 REF. WAS 2.1 REF.; 0.35±0.05 WAS 0.3; 1.50 WAS 1.6 ADD INFORMATION BLOCK ABOVE COD SYMBOL	6/28/10	48122	CPM

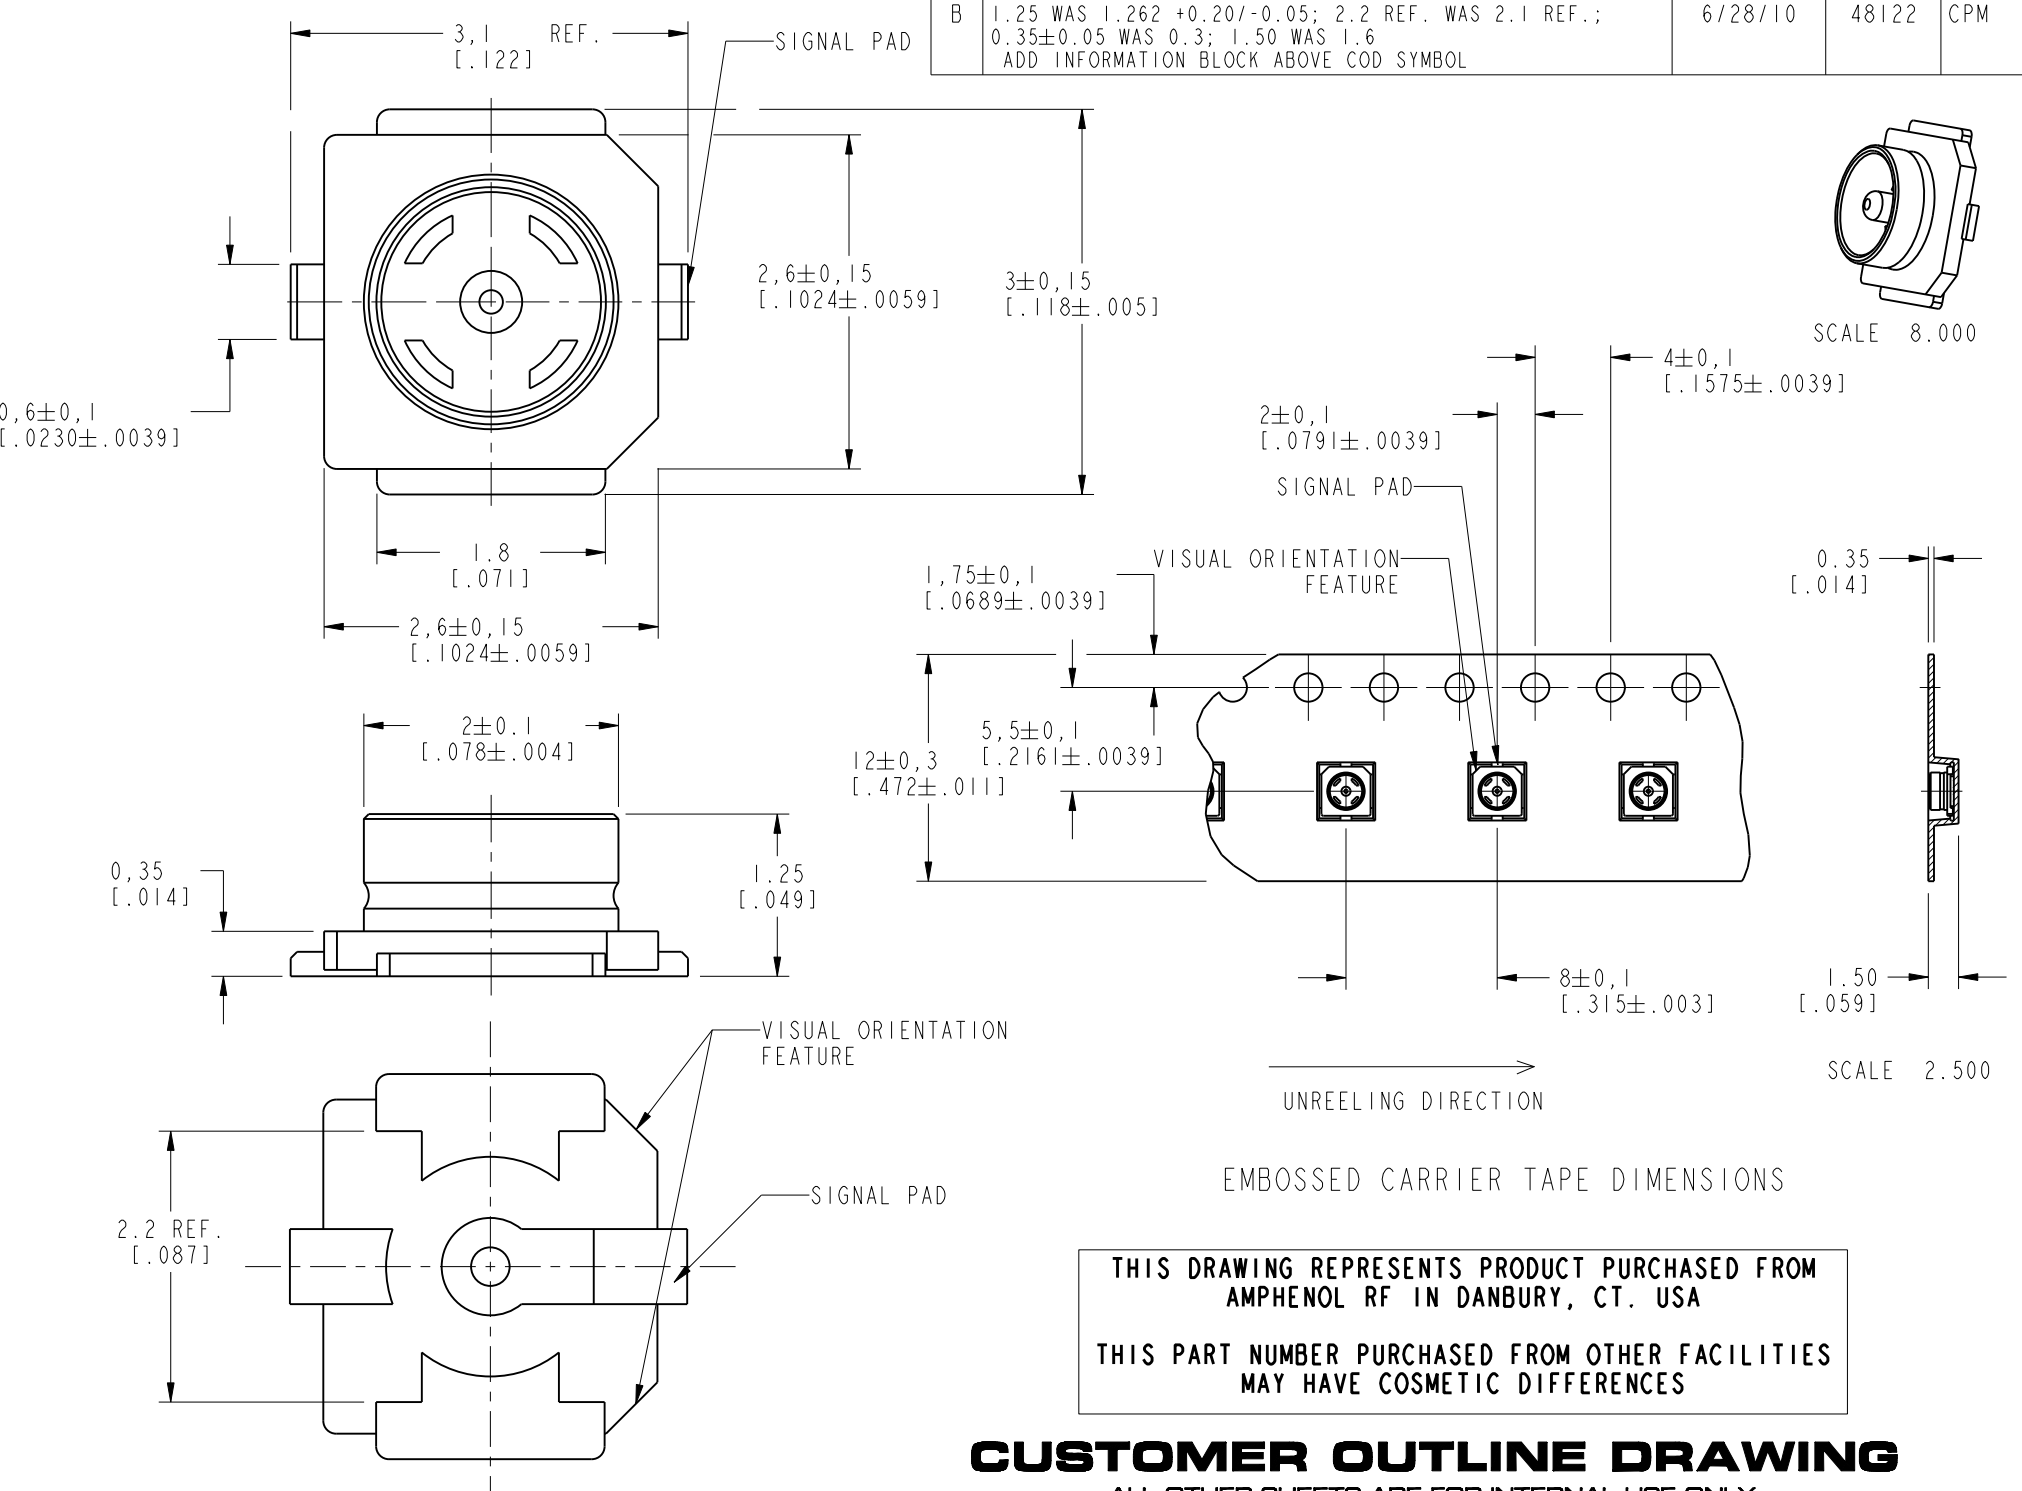

Top View Dimensions:

- Overall width: 3.1 REF. [.122]
- Distance from left edge to center: 0.6±0.1 [.0230±.0039]
- Distance from center to right edge: 2.6±0.15 [.1024±.0059]
- Distance from center to signal pad: 2.6±0.15 [.1024±.0059]
- Distance from center to visual orientation feature: 1.8 [.071]
- Distance from center to bottom edge: 2.6±0.15 [.1024±.0059]

Front View Dimensions:

- Overall height: 2.2 REF. [.087]
- Distance from top edge to center: 2.2 REF. [.087]
- Distance from center to bottom edge: 2.2 REF. [.087]
- Distance from center to signal pad: 2.2 REF. [.087]
- Distance from center to visual orientation feature: 2.2 REF. [.087]

Side View Dimensions:

- Overall thickness: 0.35 [.014]
- Distance from top edge to center: 1.25 [.049]
- Distance from center to bottom edge: 1.25 [.049]
- Distance from center to signal pad: 1.25 [.049]
- Distance from center to visual orientation feature: 1.25 [.049]

Carrier Tape Dimensions:

- Overall width: 12±0.3 [.472±.011]
- Distance from left edge to center: 5.5±0.1 [.2161±.0039]
- Distance from center to right edge: 5.5±0.1 [.2161±.0039]
- Distance from center to signal pad: 5.5±0.1 [.2161±.0039]
- Distance from center to visual orientation feature: 5.5±0.1 [.2161±.0039]
- Distance from center to bottom edge: 5.5±0.1 [.2161±.0039]
- Distance from center to signal pad: 5.5±0.1 [.2161±.0039]
- Distance from center to visual orientation feature: 5.5±0.1 [.2161±.0039]
- Distance from center to bottom edge: 5.5±0.1 [.2161±.0039]

Labels:

- SIGNAL PAD
- VISUAL ORIENTATION FEATURE
- UNREELING DIRECTION

Scale: 8.000

Scale: 2.500

EMBOSSED CARRIER TAPE DIMENSIONS

THIS DRAWING REPRESENTS PRODUCT PURCHASED FROM AMPHENOL RF IN DANBURY, CT. USA

THIS PART NUMBER PURCHASED FROM OTHER FACILITIES MAY HAVE COSMETIC DIFFERENCES

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

REV
B