

301LS28

M

DRAWING
NUMBER

8

7

ISSUE

5

REVISIONS

A CO15200

M B F

21 JUNE 65

B SR 2756

OMW

3 MAR 67

C CO25152

R E R

22 APR 69

D CO68675

T S M

9 OCT 90

E CO-77031

J D B

22 DEC 93

W R A

22 JUN 65

22 JUN 65

22 JUN 65

22 JUN 65

22 JUN 65

22 JUN 65

22 JUN 65

22 JUN 65

REPLACES

RELEASE NO. ETS SR 12756

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65




12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

12 JUN 65

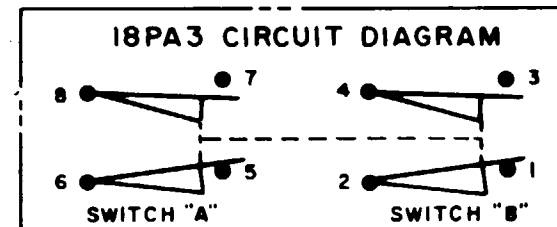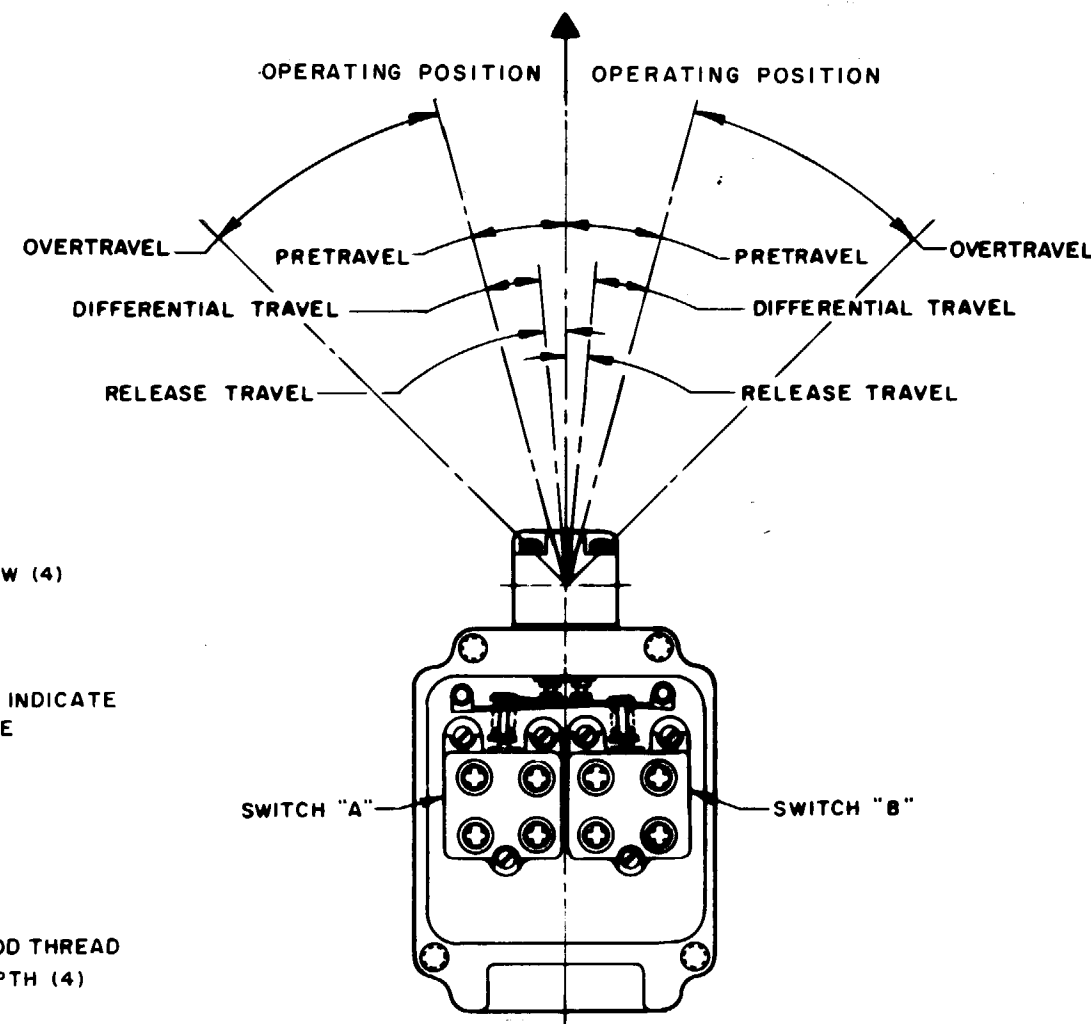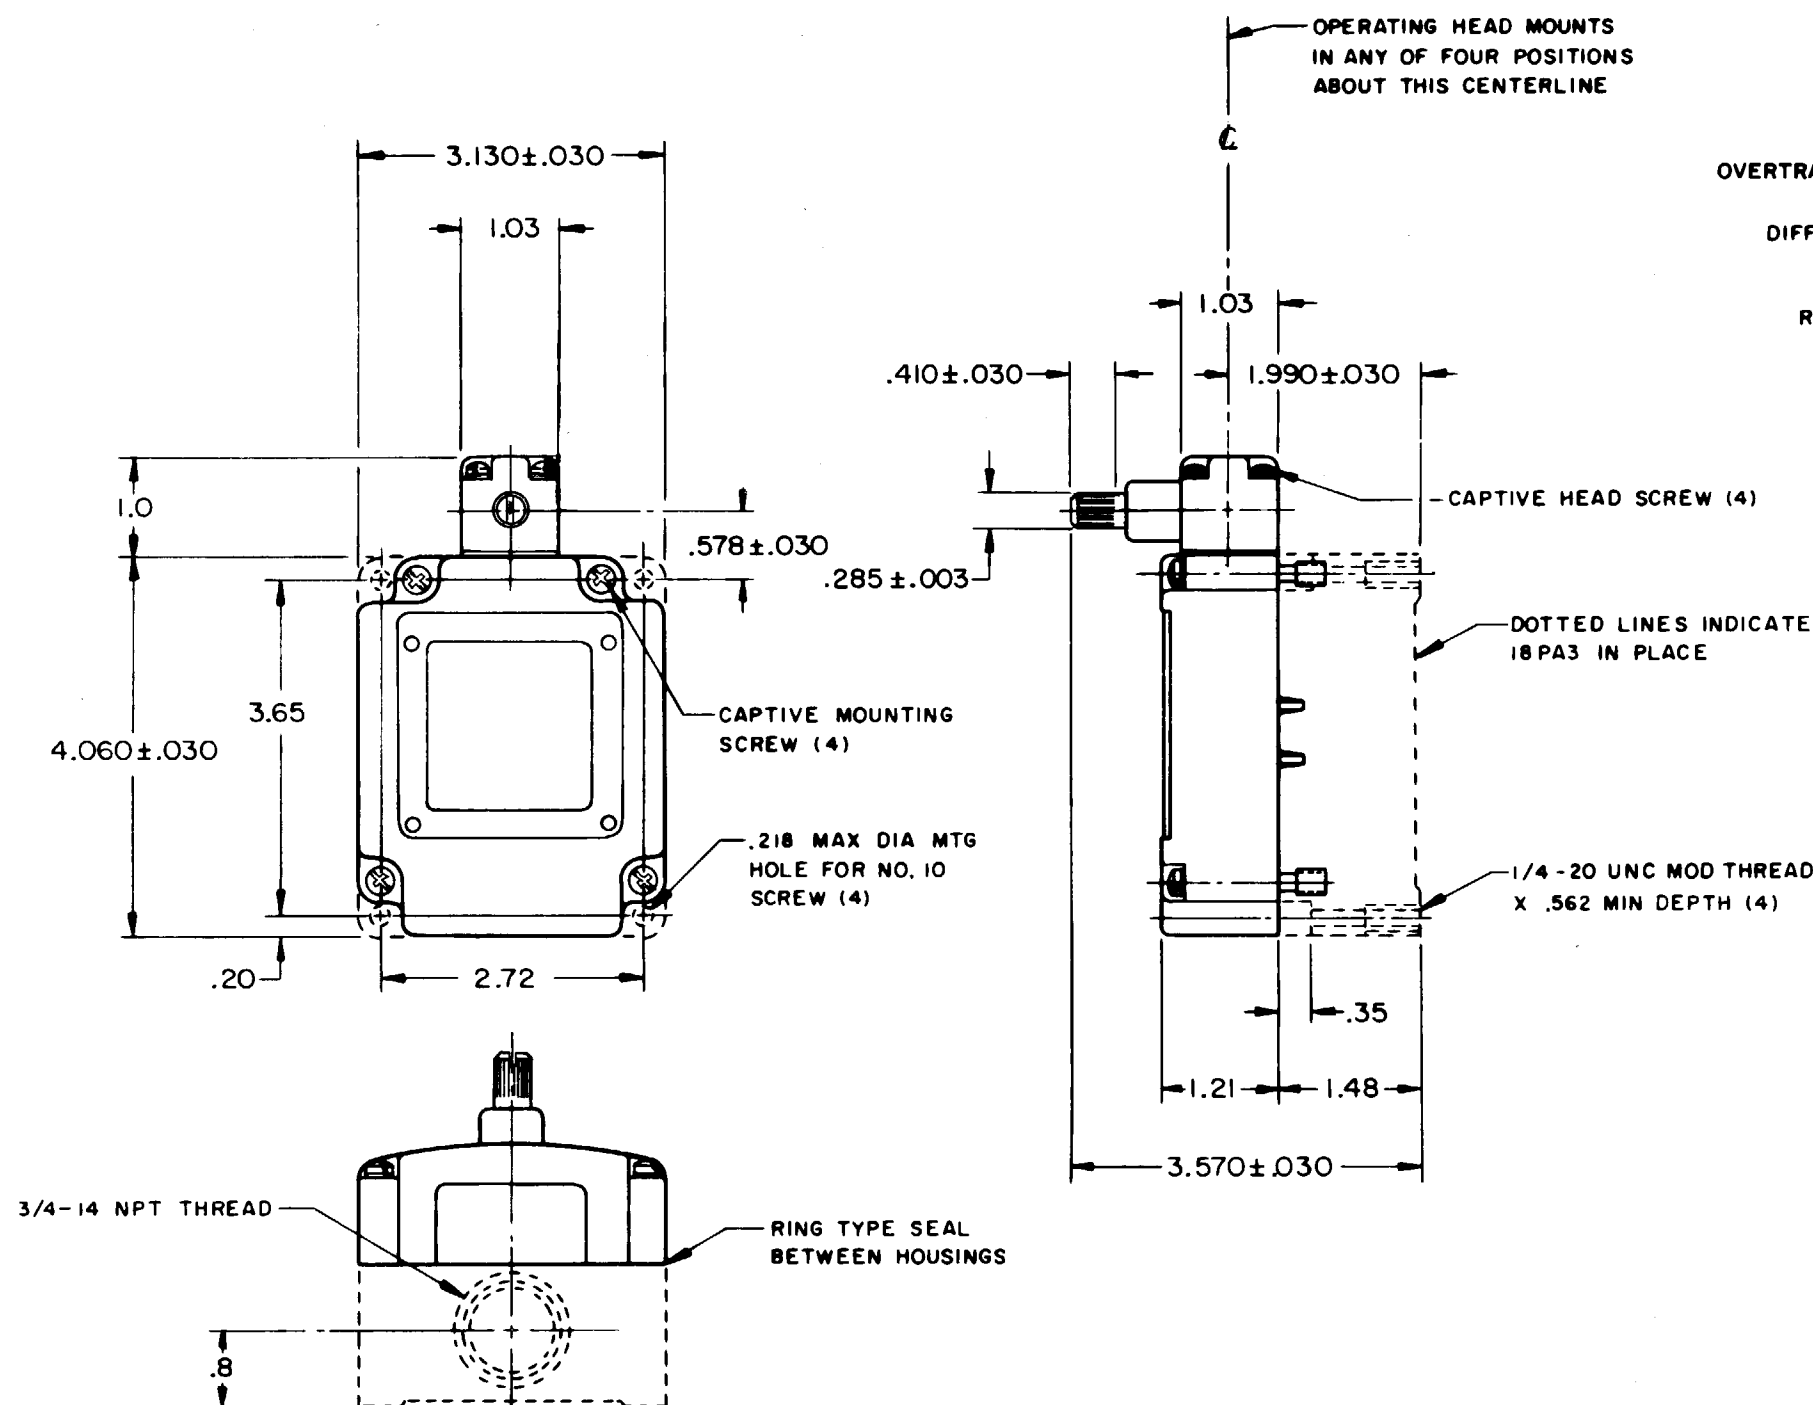

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS
OPERATING FORCE — — 7 1/2 IN LB MAX
FULL OVERTRAVEL FORCE — — 9 IN LB MAX
RELEASE FORCE — — — 3/4 IN LB MIN
PRETRAVEL — — — — — 15° MAX
DIFFERENTIAL TRAVEL — — — 10° MAX
OVERTRAVEL — — — — — 30° MIN
RELEASE TRAVEL — — — — — 5° MIN
SWITCH-BASIC REPLACEMENT — — — 2MN6 (2)

ELECTRICAL DATA
CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)
10A-120, 240, OR 480 VAC; 1/3 HP - 120 VAC 3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX

SCALE 1/2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT

NOTE -

- 1-SHAFT WILL OPERATE BOTH SWITCHES IN EITHER DIRECTION FROM NEUTRAL
- 2-BASIC SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY