



# 74LVC3G14

Triple inverting Schmitt trigger with 5 V tolerant input

Rev. 18 — 1 May 2024

Product data sheet

## 1. General description

---

The 74LVC3G14 provides three inverting buffers with Schmitt trigger input. It is capable of transforming slowly changing input signals into sharply defined, jitter-free output signals.

The inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of this device in a mixed 3.3 V and 5 V environment. Schmitt trigger action at the inputs makes the circuit tolerant of slower input rise and fall time. This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

## 2. Features and benefits

---

- Wide supply voltage range from 1.65 V to 5.5 V
- 5 V tolerant input/output for interfacing with 5 V logic
- High noise immunity
- $\pm 24$  mA output drive ( $V_{CC} = 3.0$  V)
- CMOS low power consumption
- Latch-up performance exceeds 250 mA
- Direct interface with TTL levels
- Unlimited rise and fall times
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Multiple package options
- Specified from  $-40$  °C to  $+85$  °C and  $-40$  °C to  $+125$  °C.

## 3. Applications

---

- Wave and pulse shaper for highly noisy environment
- Astable multivibrator
- Monostable multivibrator.

4. Ordering information

Table 1. Ordering information

| Type number                 | Package           |        |                                                                                             |                          |
|-----------------------------|-------------------|--------|---------------------------------------------------------------------------------------------|--------------------------|
|                             | Temperature range | Name   | Description                                                                                 | Version                  |
| <a href="#">74LVC3G14DP</a> | -40 °C to +125 °C | TSSOP8 | plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm     | <a href="#">SOT505-2</a> |
| <a href="#">74LVC3G14DC</a> | -40 °C to +125 °C | VSSOP8 | plastic very thin shrink small outline package; 8 leads; body width 2.3 mm                  | <a href="#">SOT765-1</a> |
| <a href="#">74LVC3G14GT</a> | -40 °C to +125 °C | XSON8  | plastic extremely thin small outline package; no leads; 8 terminals; body 1 × 1.95 × 0.5 mm | <a href="#">SOT833-1</a> |
| <a href="#">74LVC3G14GN</a> | -40 °C to +125 °C | XSON8  | extremely thin small outline package; no leads; 8 terminals; body 1.2 × 1.0 × 0.35 mm       | <a href="#">SOT1116</a>  |
| <a href="#">74LVC3G14GS</a> | -40 °C to +125 °C | XSON8  | extremely thin small outline package; no leads; 8 terminals; body 1.35 × 1.0 × 0.35 mm      | <a href="#">SOT1203</a>  |

5. Marking

Table 2. Marking codes

| Type number | Marking code [1] |
|-------------|------------------|
| 74LVC3G14DP | V14              |
| 74LVC3G14DC | V14              |
| 74LVC3G14GT | V14              |
| 74LVC3G14GN | VK               |
| 74LVC3G14GS | VK               |

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

6. Functional diagram




Fig. 1. Logic symbol




Fig. 2. IEC logic symbol





Fig. 3. Logic diagram (one Schmitt trigger)

7. Pinning information

7.1. Pinning

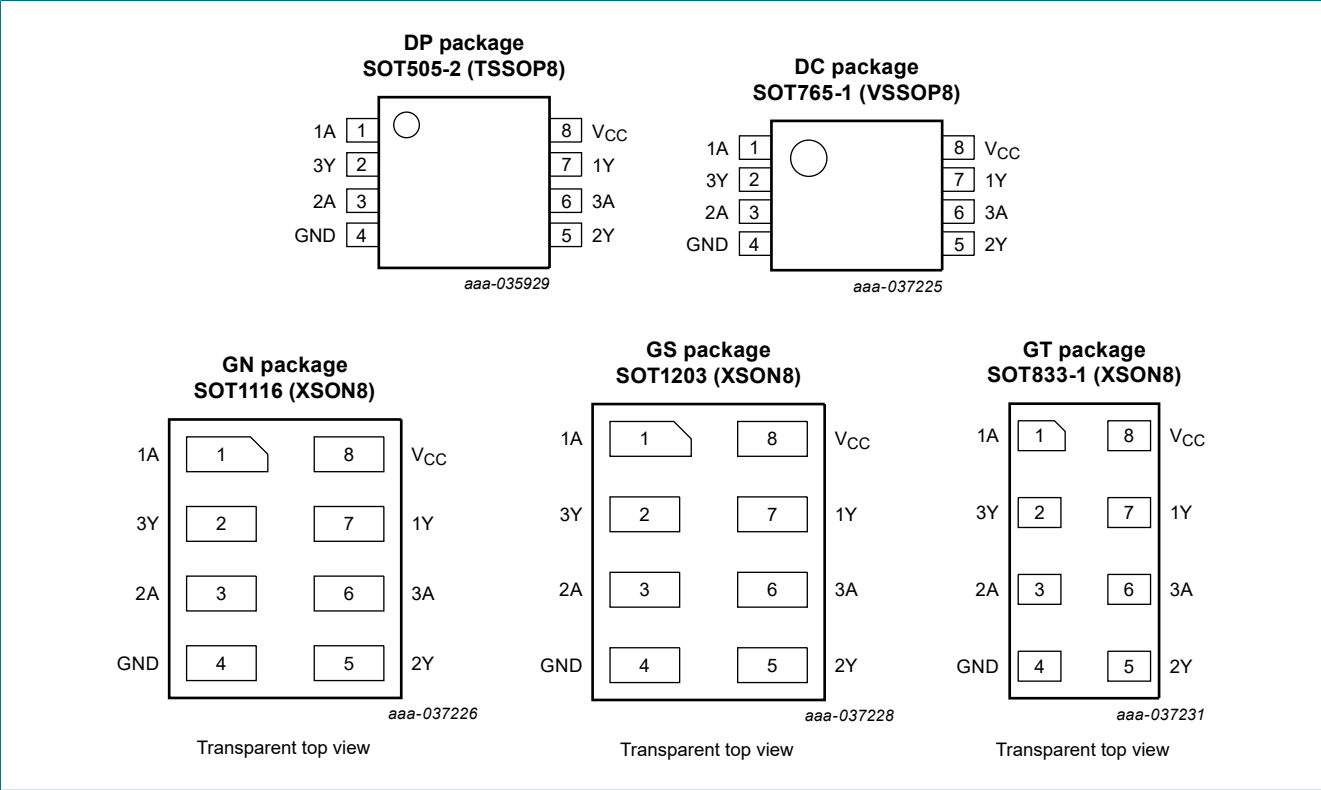

7.2. Pin description

Table 3. Pin description

| Symbol          | Pin     | Description    |
|-----------------|---------|----------------|
| 1A, 2A, 3A      | 1, 3, 6 | data input     |
| 1Y, 2Y, 3Y      | 7, 5, 2 | data output    |
| GND             | 4       | ground (0 V)   |
| V <sub>CC</sub> | 8       | supply voltage |

8. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level

| Input nA | Output nY |
|----------|-----------|
| L        | H         |
| H        | L         |

9. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter               | Conditions                                               | Min  | Max                   | Unit |
|------------------|-------------------------|----------------------------------------------------------|------|-----------------------|------|
| V <sub>CC</sub>  | supply voltage          |                                                          | -0.5 | +6.5                  | V    |
| I <sub>IK</sub>  | input clamping current  | V <sub>I</sub> < 0 V                                     | -50  | -                     | mA   |
| V <sub>I</sub>   | input voltage           | [1]                                                      | -0.5 | +6.5                  | V    |
| I <sub>OK</sub>  | output clamping current | V <sub>O</sub> > V <sub>CC</sub> or V <sub>O</sub> < 0 V | -    | ±50                   | mA   |
| V <sub>O</sub>   | output voltage          | Active mode [1]                                          | -0.5 | V <sub>CC</sub> + 0.5 | V    |
|                  |                         | Power-down mode; V <sub>CC</sub> = 0 V [1]               | -0.5 | +6.5                  | V    |
| I <sub>O</sub>   | output current          | V <sub>O</sub> = 0 V to V <sub>CC</sub>                  | -    | ±50                   | mA   |
| I <sub>CC</sub>  | supply current          |                                                          | -    | 100                   | mA   |
| I <sub>GND</sub> | ground current          |                                                          | -100 | -                     | mA   |
| P <sub>tot</sub> | total power dissipation | T <sub>amb</sub> = -40 °C to +125 °C [2]                 | -    | 250                   | mW   |
| T <sub>stg</sub> | storage temperature     |                                                          | -65  | +150                  | °C   |

- [1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
- [2] For SOT505-2 (TSSOP8) package: P<sub>tot</sub> derates linearly with 4.6 mW/K above 96 °C.  
For SOT765-1 (VSSOP8) package: P<sub>tot</sub> derates linearly with 4.9 mW/K above 99 °C.  
For SOT833-1 (XSON8) package: P<sub>tot</sub> derates linearly with 3.1 mW/K above 68 °C.  
For SOT1116 (XSON8) package: P<sub>tot</sub> derates linearly with 4.2 mW/K above 90 °C.  
For SOT1203 (XSON8) package: P<sub>tot</sub> derates linearly with 3.6 mW/K above 81 °C.

10. Recommended operating conditions

Table 6. Operating conditions

| Symbol           | Parameter           | Conditions                             | Min  | Max             | Unit |
|------------------|---------------------|----------------------------------------|------|-----------------|------|
| V <sub>CC</sub>  | supply voltage      |                                        | 1.65 | 5.5             | V    |
| V <sub>I</sub>   | input voltage       |                                        | 0    | 5.5             | V    |
| V <sub>O</sub>   | output voltage      | Active mode                            | 0    | V <sub>CC</sub> | V    |
|                  |                     | Power-down mode; V <sub>CC</sub> = 0 V | 0    | 5.5             | V    |
| T <sub>amb</sub> | ambient temperature |                                        | -40  | +125            | °C   |

11. Static characteristics

Table 7. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                 | Conditions                                                                                       | -40 °C to +85 °C      |         |      | -40 °C to +125 °C     |      | Unit |
|------------------|---------------------------|--------------------------------------------------------------------------------------------------|-----------------------|---------|------|-----------------------|------|------|
|                  |                           |                                                                                                  | Min                   | Typ [1] | Max  | Min                   | Max  |      |
| V <sub>OH</sub>  | HIGH-level output voltage | V <sub>I</sub> = V <sub>T+</sub> or V <sub>T-</sub>                                              |                       |         |      |                       |      |      |
|                  |                           | I <sub>O</sub> = -100 µA; V <sub>CC</sub> = 1.65 V to 5.5 V                                      | V <sub>CC</sub> - 0.1 | -       | -    | V <sub>CC</sub> - 0.1 | -    | V    |
|                  |                           | I <sub>O</sub> = -4 mA; V <sub>CC</sub> = 1.65 V                                                 | 1.2                   | -       | -    | 0.95                  | -    | V    |
|                  |                           | I <sub>O</sub> = -8 mA; V <sub>CC</sub> = 2.3 V                                                  | 1.9                   | -       | -    | 1.7                   | -    | V    |
|                  |                           | I <sub>O</sub> = -12 mA; V <sub>CC</sub> = 2.7 V                                                 | 2.2                   | -       | -    | 1.9                   | -    | V    |
|                  |                           | I <sub>O</sub> = -24 mA; V <sub>CC</sub> = 3.0 V                                                 | 2.3                   | -       | -    | 2.0                   | -    | V    |
|                  |                           | I <sub>O</sub> = -32 mA; V <sub>CC</sub> = 4.5 V                                                 | 3.8                   | -       | -    | 3.4                   | -    | V    |
| V <sub>OL</sub>  | LOW-level output voltage  | V <sub>I</sub> = V <sub>T+</sub> or V <sub>T-</sub>                                              |                       |         |      |                       |      |      |
|                  |                           | I <sub>O</sub> = 100 µA; V <sub>CC</sub> = 1.65 V to 5.5 V                                       | -                     | -       | 0.1  | -                     | 0.1  | V    |
|                  |                           | I <sub>O</sub> = 4 mA; V <sub>CC</sub> = 1.65 V                                                  | -                     | -       | 0.45 | -                     | 0.7  | V    |
|                  |                           | I <sub>O</sub> = 8 mA; V <sub>CC</sub> = 2.3 V                                                   | -                     | -       | 0.3  | -                     | 0.45 | V    |
|                  |                           | I <sub>O</sub> = 12 mA; V <sub>CC</sub> = 2.7 V                                                  | -                     | -       | 0.4  | -                     | 0.6  | V    |
|                  |                           | I <sub>O</sub> = 24 mA; V <sub>CC</sub> = 3.0 V                                                  | -                     | -       | 0.55 | -                     | 0.8  | V    |
|                  |                           | I <sub>O</sub> = 32 mA; V <sub>CC</sub> = 4.5 V                                                  | -                     | -       | 0.55 | -                     | 0.8  | V    |
| I <sub>I</sub>   | input leakage current     | V <sub>I</sub> = 5.5 V or GND; V <sub>CC</sub> = 0 V to 5.5 V                                    | -                     | ±0.1    | ±1   | -                     | ±1   | µA   |
| I <sub>OFF</sub> | power-off leakage current | V <sub>I</sub> or V <sub>O</sub> = 5.5 V; V <sub>CC</sub> = 0 V                                  | -                     | ±0.1    | ±2   | -                     | ±2   | µA   |
| I <sub>CC</sub>  | supply current            | V <sub>I</sub> = 5.5 V or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 1.65 V to 5.5 V           | -                     | 0.1     | 4    | -                     | 4    | µA   |
| ΔI <sub>CC</sub> | additional supply current | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 2.3 V to 5.5 V | -                     | 5       | 500  | -                     | 500  | µA   |
| C <sub>I</sub>   | input capacitance         | V <sub>CC</sub> = 3.3 V; V <sub>I</sub> = GND to V <sub>CC</sub>                                 | -                     | 3.5     | -    | -                     | -    | pF   |

[1] All typical values are measured at maximum V<sub>CC</sub> and T<sub>amb</sub> = 25 °C.

11.1. Transfer characteristics

Table 8. Transfer characteristics

Voltages are referenced to GND (ground = 0 V; for test circuit see Fig. 8.


| Symbol          | Parameter                        | Conditions              | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|-----------------|----------------------------------|-------------------------|------------------|---------|------|-------------------|------|------|
|                 |                                  |                         | Min              | Typ [1] | Max  | Min               | Max  |      |
| V <sub>T+</sub> | positive-going threshold voltage | see Fig. 4 and Fig. 5   |                  |         |      |                   |      |      |
|                 |                                  | V <sub>CC</sub> = 1.8 V | 0.70             | 1.10    | 1.50 | 0.70              | 1.70 | V    |
|                 |                                  | V <sub>CC</sub> = 2.3 V | 1.00             | 1.40    | 1.80 | 1.00              | 2.00 | V    |
|                 |                                  | V <sub>CC</sub> = 3.0 V | 1.30             | 1.76    | 2.20 | 1.30              | 2.40 | V    |
|                 |                                  | V <sub>CC</sub> = 4.5 V | 1.90             | 2.47    | 3.10 | 1.90              | 3.30 | V    |
|                 |                                  | V <sub>CC</sub> = 5.5 V | 2.20             | 2.91    | 3.60 | 2.20              | 3.80 | V    |

Triple inverting Schmitt trigger with 5 V tolerant input

| Symbol          | Parameter                        | Conditions                                                          | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|-----------------|----------------------------------|---------------------------------------------------------------------|------------------|---------|------|-------------------|------|------|
|                 |                                  |                                                                     | Min              | Typ [1] | Max  | Min               | Max  |      |
| V <sub>T-</sub> | negative-going threshold voltage | see Fig. 4 and Fig. 5                                               |                  |         |      |                   |      |      |
|                 |                                  | V <sub>CC</sub> = 1.8 V                                             | 0.25             | 0.61    | 0.90 | 0.25              | 1.10 | V    |
|                 |                                  | V <sub>CC</sub> = 2.3 V                                             | 0.40             | 0.80    | 1.15 | 0.40              | 1.35 | V    |
|                 |                                  | V <sub>CC</sub> = 3.0 V                                             | 0.60             | 1.04    | 1.50 | 0.60              | 1.70 | V    |
|                 |                                  | V <sub>CC</sub> = 4.5 V                                             | 1.00             | 1.55    | 2.00 | 1.00              | 2.20 | V    |
|                 |                                  | V <sub>CC</sub> = 5.5 V                                             | 1.20             | 1.86    | 2.30 | 1.20              | 2.50 | V    |
| V <sub>H</sub>  | hysteresis voltage               | (V <sub>T+</sub> - V <sub>T-</sub> ); see Fig. 4, Fig. 5 and Fig. 6 |                  |         |      |                   |      |      |
|                 |                                  | V <sub>CC</sub> = 1.8 V                                             | 0.15             | 0.49    | 1.00 | 0.15              | 1.20 | V    |
|                 |                                  | V <sub>CC</sub> = 2.3 V                                             | 0.25             | 0.60    | 1.10 | 0.25              | 1.30 | V    |
|                 |                                  | V <sub>CC</sub> = 3.0 V                                             | 0.40             | 0.73    | 1.20 | 0.40              | 1.40 | V    |
|                 |                                  | V <sub>CC</sub> = 4.5 V                                             | 0.60             | 0.92    | 1.50 | 0.60              | 1.70 | V    |
|                 |                                  | V <sub>CC</sub> = 5.5 V                                             | 0.70             | 1.02    | 1.70 | 0.70              | 1.90 | V    |

[1] All typical values are measured at T<sub>amb</sub> = 25 °C

11.2. Waveforms transfer characteristics

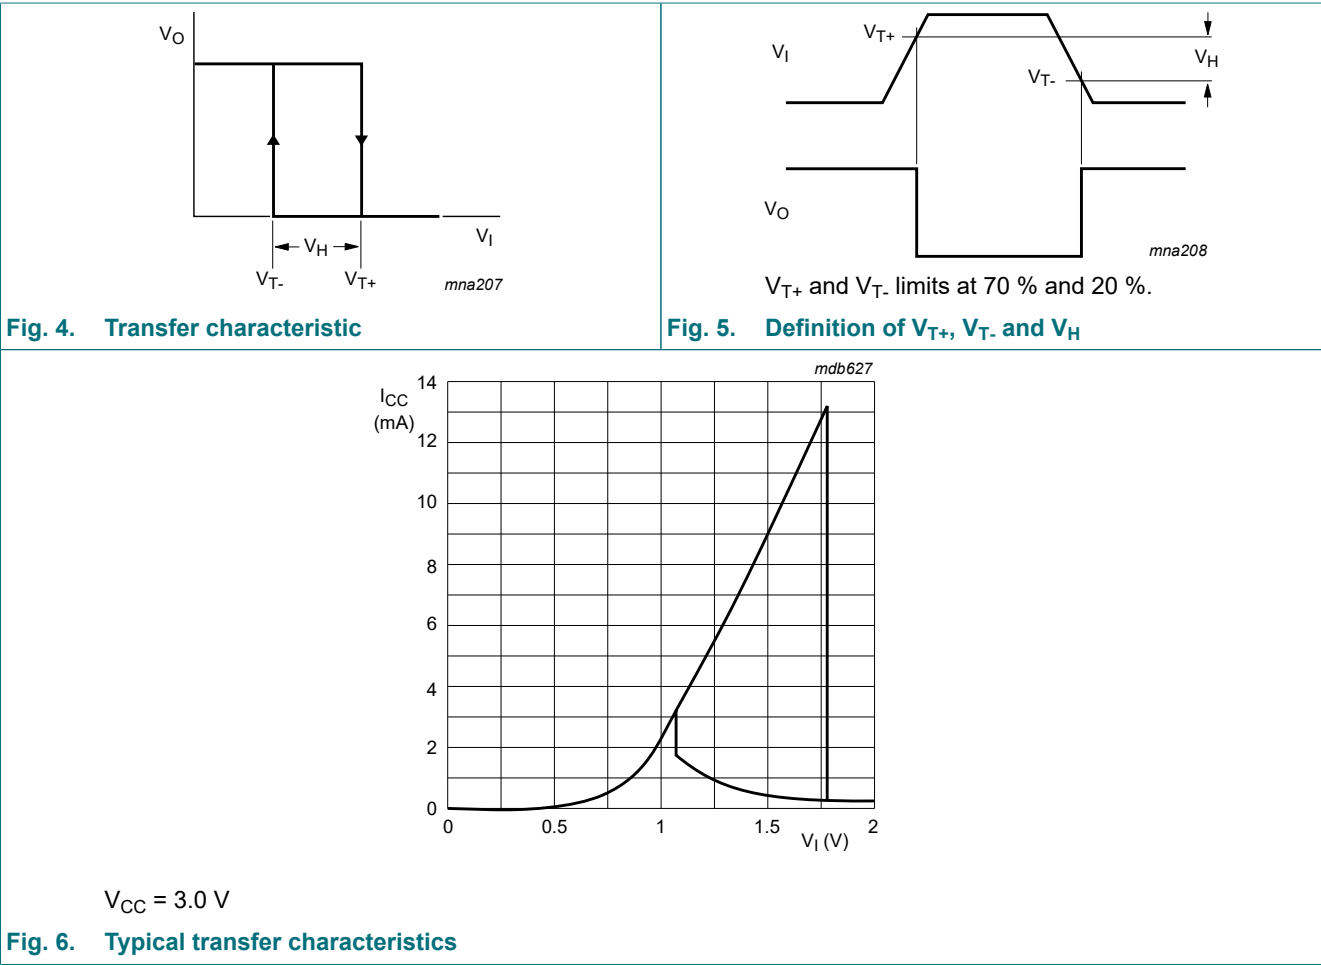

12. Dynamic characteristics

Table 9. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V). For test circuit see Fig. 8.

| Symbol          | Parameter                     | Conditions                                                            | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|-----------------|-------------------------------|-----------------------------------------------------------------------|------------------|---------|------|-------------------|------|------|
|                 |                               |                                                                       | Min              | Typ [1] | Max  | Min               | Max  |      |
| t <sub>pd</sub> | propagation delay             | nA to nY; see Fig. 7 [2]                                              |                  |         |      |                   |      |      |
|                 |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                    | 1.0              | 4.2     | 11.0 | 1.0               | 12.0 | ns   |
|                 |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                      | 0.5              | 3.0     | 6.5  | 0.5               | 7.2  | ns   |
|                 |                               | V <sub>CC</sub> = 2.7 V                                               | 0.5              | 3.8     | 7.0  | 0.5               | 7.7  | ns   |
|                 |                               | V <sub>CC</sub> = 3.0 V to 3.6 V                                      | 0.5              | 3.2     | 6.0  | 0.5               | 6.7  | ns   |
|                 |                               | V <sub>CC</sub> = 4.5 V to 5.5 V                                      | 0.5              | 2.4     | 4.3  | 0.5               | 4.7  | ns   |
| C <sub>PD</sub> | power dissipation capacitance | V <sub>I</sub> = GND to V <sub>CC</sub> ; V <sub>CC</sub> = 3.3 V [3] | -                | 18.1    | -    | -                 | -    | pF   |

- [1] Typical values are measured at T<sub>amb</sub> = 25 °C and V<sub>CC</sub> = 1.8 V, 2.5 V, 2.7 V, 3.3 V and 5.0 V respectively.
- [2] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.
- [3] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).
- $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where:
- f<sub>i</sub> = input frequency in MHz;
- f<sub>o</sub> = output frequency in MHz;
- C<sub>L</sub> = output load capacitance in pF;
- V<sub>CC</sub> = supply voltage in V;
- N = number of inputs switching;
- $\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

12.1. Waveforms and test circuit


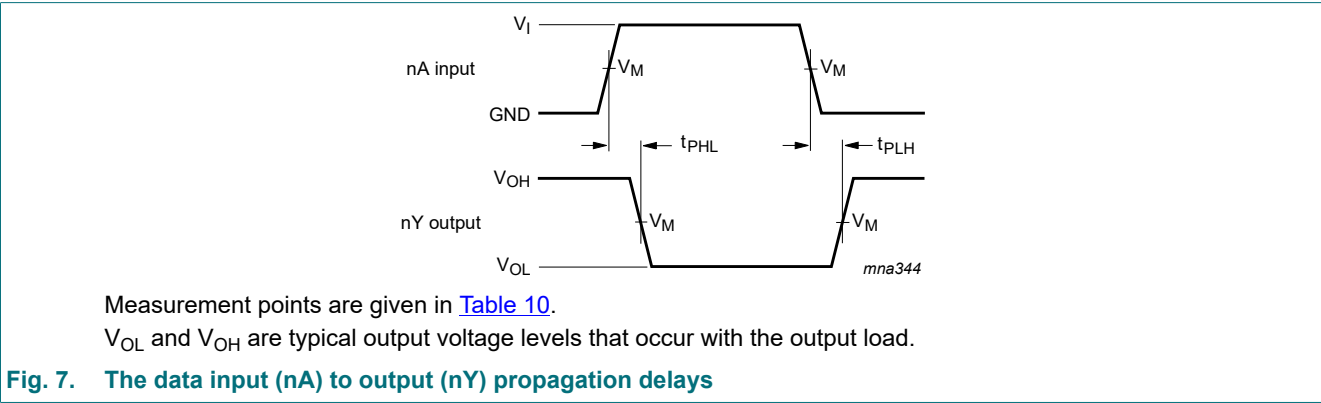


Table 10. Measurement points

| V <sub>CC</sub>  | Input V <sub>M</sub> | Output V <sub>M</sub> |
|------------------|----------------------|-----------------------|
| 1.65 V to 1.95 V | 0.5V <sub>CC</sub>   | 0.5V <sub>CC</sub>    |
| 2.3 V to 2.7 V   | 0.5V <sub>CC</sub>   | 0.5V <sub>CC</sub>    |
| 2.7 V            | 1.5 V                | 1.5 V                 |
| 3.0 V to 3.6 V   | 1.5 V                | 1.5 V                 |
| 4.5 V to 5.5 V   | 0.5V <sub>CC</sub>   | 0.5V <sub>CC</sub>    |

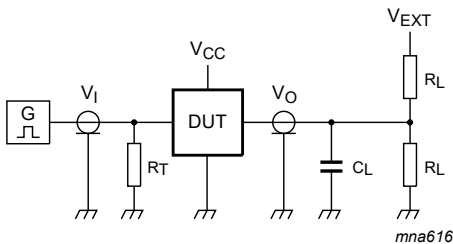

Test data is given in [Table 11](#).  
Definitions for test circuit:  
 $R_L$  = Load resistance;  
 $C_L$  = Load capacitance including jig and probe capacitance;  
 $R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator;  
 $V_{EXT}$  = External voltage for measuring switching times

Fig. 8. Test circuit for measuring switching times

Table 11. Test data

| Supply voltage   | Input    |                       | Load  |              | $V_{EXT}$          |
|------------------|----------|-----------------------|-------|--------------|--------------------|
| $V_{CC}$         | $V_I$    | $t_r = t_f$           | $C_L$ | $R_L$        | $t_{PLH}, t_{PHL}$ |
| 1.65 V to 1.95 V | $V_{CC}$ | $\leq 2.0 \text{ ns}$ | 30 pF | 1 k $\Omega$ | open               |
| 2.3 V to 2.7 V   | $V_{CC}$ | $\leq 2.0 \text{ ns}$ | 30 pF | 500 $\Omega$ | open               |
| 2.7 V            | 2.7 V    | $\leq 2.5 \text{ ns}$ | 50 pF | 500 $\Omega$ | open               |
| 3.0 V to 3.6 V   | 2.7 V    | $\leq 2.5 \text{ ns}$ | 50 pF | 500 $\Omega$ | open               |
| 4.5 V to 5.5 V   | $V_{CC}$ | $\leq 2.5 \text{ ns}$ | 50 pF | 500 $\Omega$ | open               |

13. Application information


The slow input rise and fall times cause additional power dissipation, this can be calculated using the following formula:

$P_{add} = f_i \times (t_r \times \Delta I_{CC(AV)} + t_f \times \Delta I_{CC(AV)}) \times V_{CC}$  where:

- $P_{add}$  = additional power dissipation (μW);
- $f_i$  = input frequency (MHz);
- $t_r$  = input rise time (ns); 10 % to 90 %;
- $t_f$  = input fall time (ns); 90 % to 10 %;
- $\Delta I_{CC(AV)}$  = average additional supply current (μA).

$\Delta I_{CC(AV)}$  differs with positive or negative input transitions, as shown in Fig. 9.


An example of a relaxation circuit using the 74LVC3G14 is shown in Fig. 10.

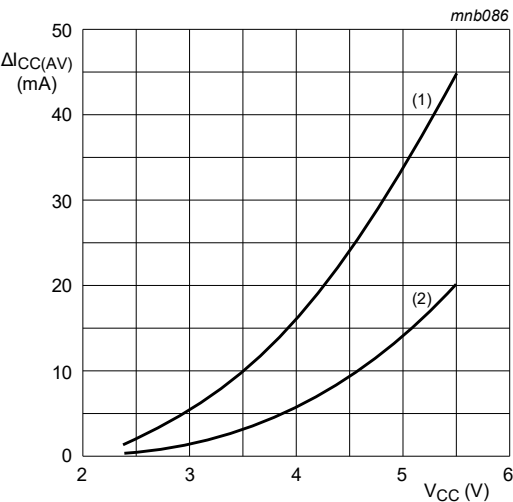

Linear change of V<sub>I</sub> between 0.8 V to 2.0 V. All values given are typical unless otherwise specified.

- (1) Positive-going edge.
- (2) Negative-going edge.

Fig. 9. ΔI<sub>CC(AV)</sub> as a function of V<sub>CC</sub>



For K-factor, see Fig. 11

Fig. 10. Relaxation oscillator

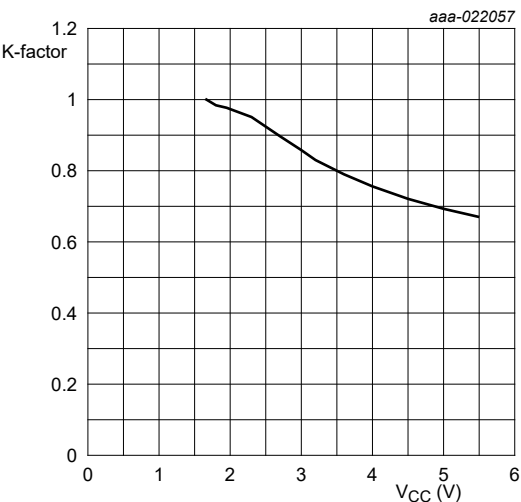


Fig. 11. Typical K-factor for relaxation oscillator

14. Package outline

TSSOP8: plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm    SOT505-2

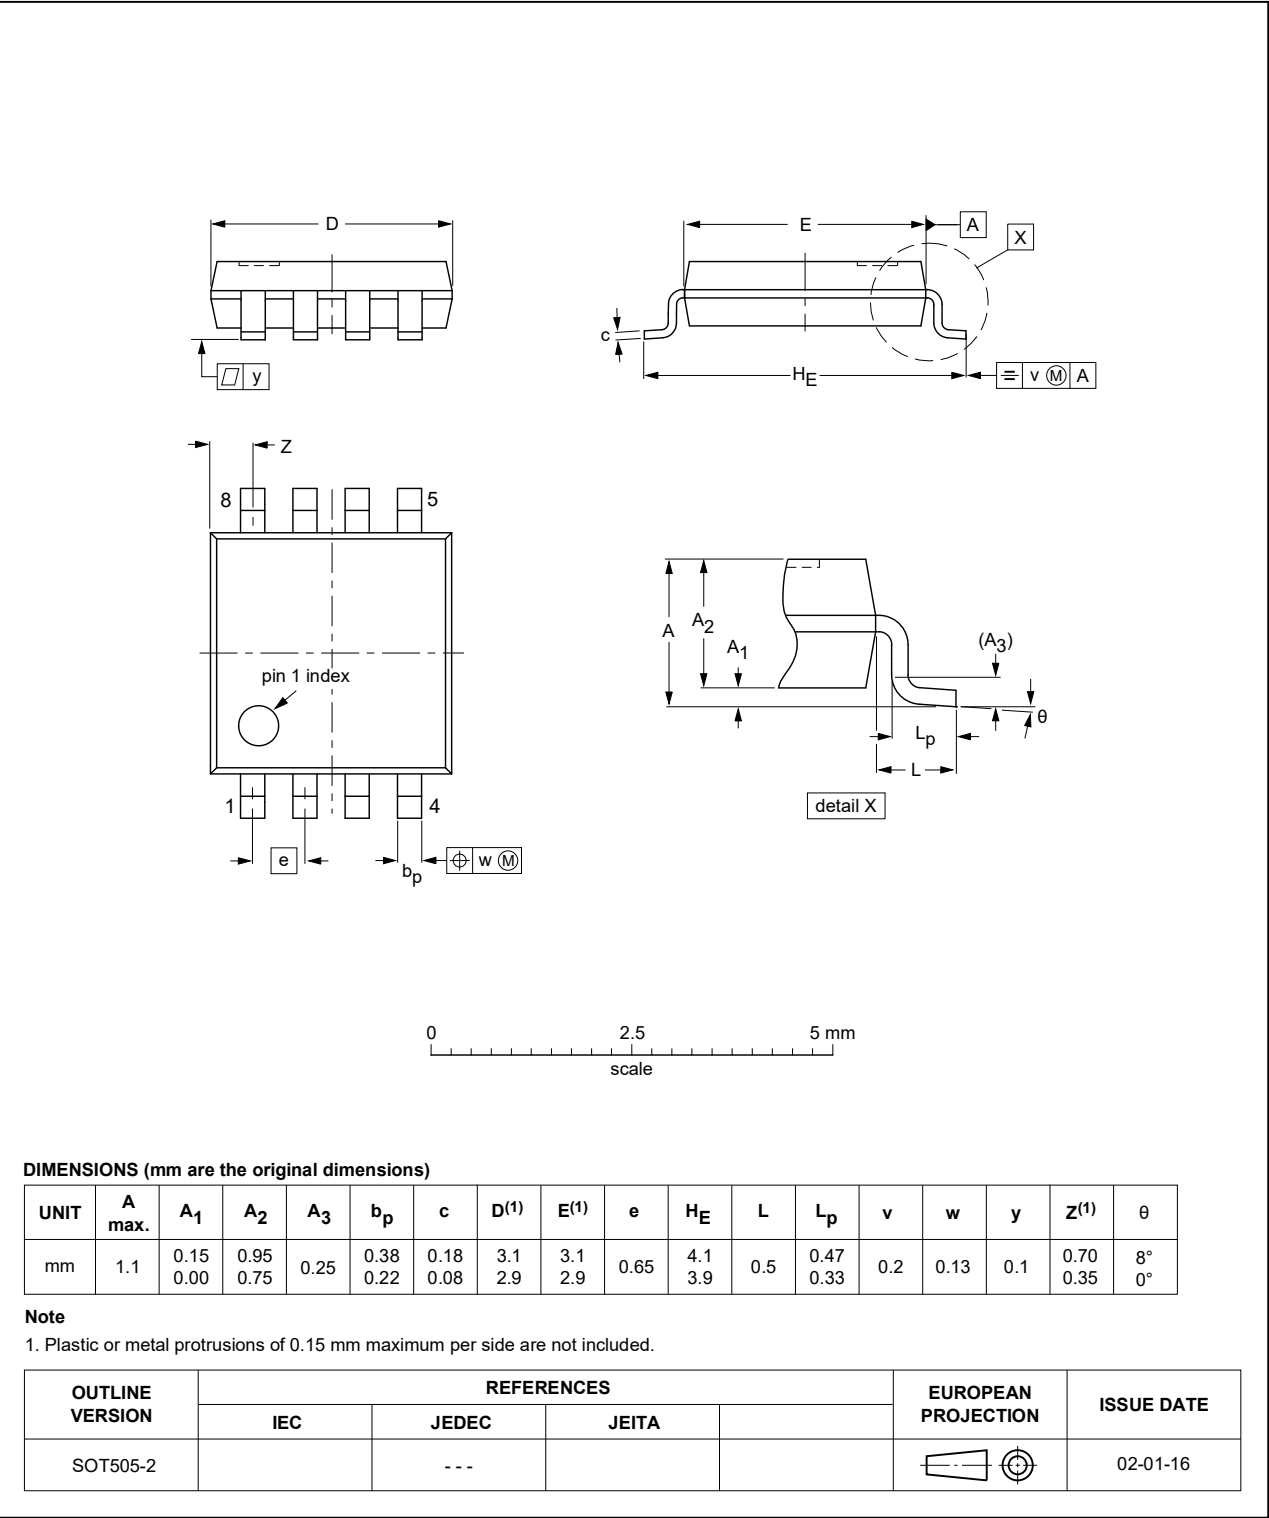


Fig. 12. Package outline SOT505-2 (TSSOP8)

VSSOP8: plastic very thin shrink small outline package; 8 leads; body width 2.3 mm

SOT765-1

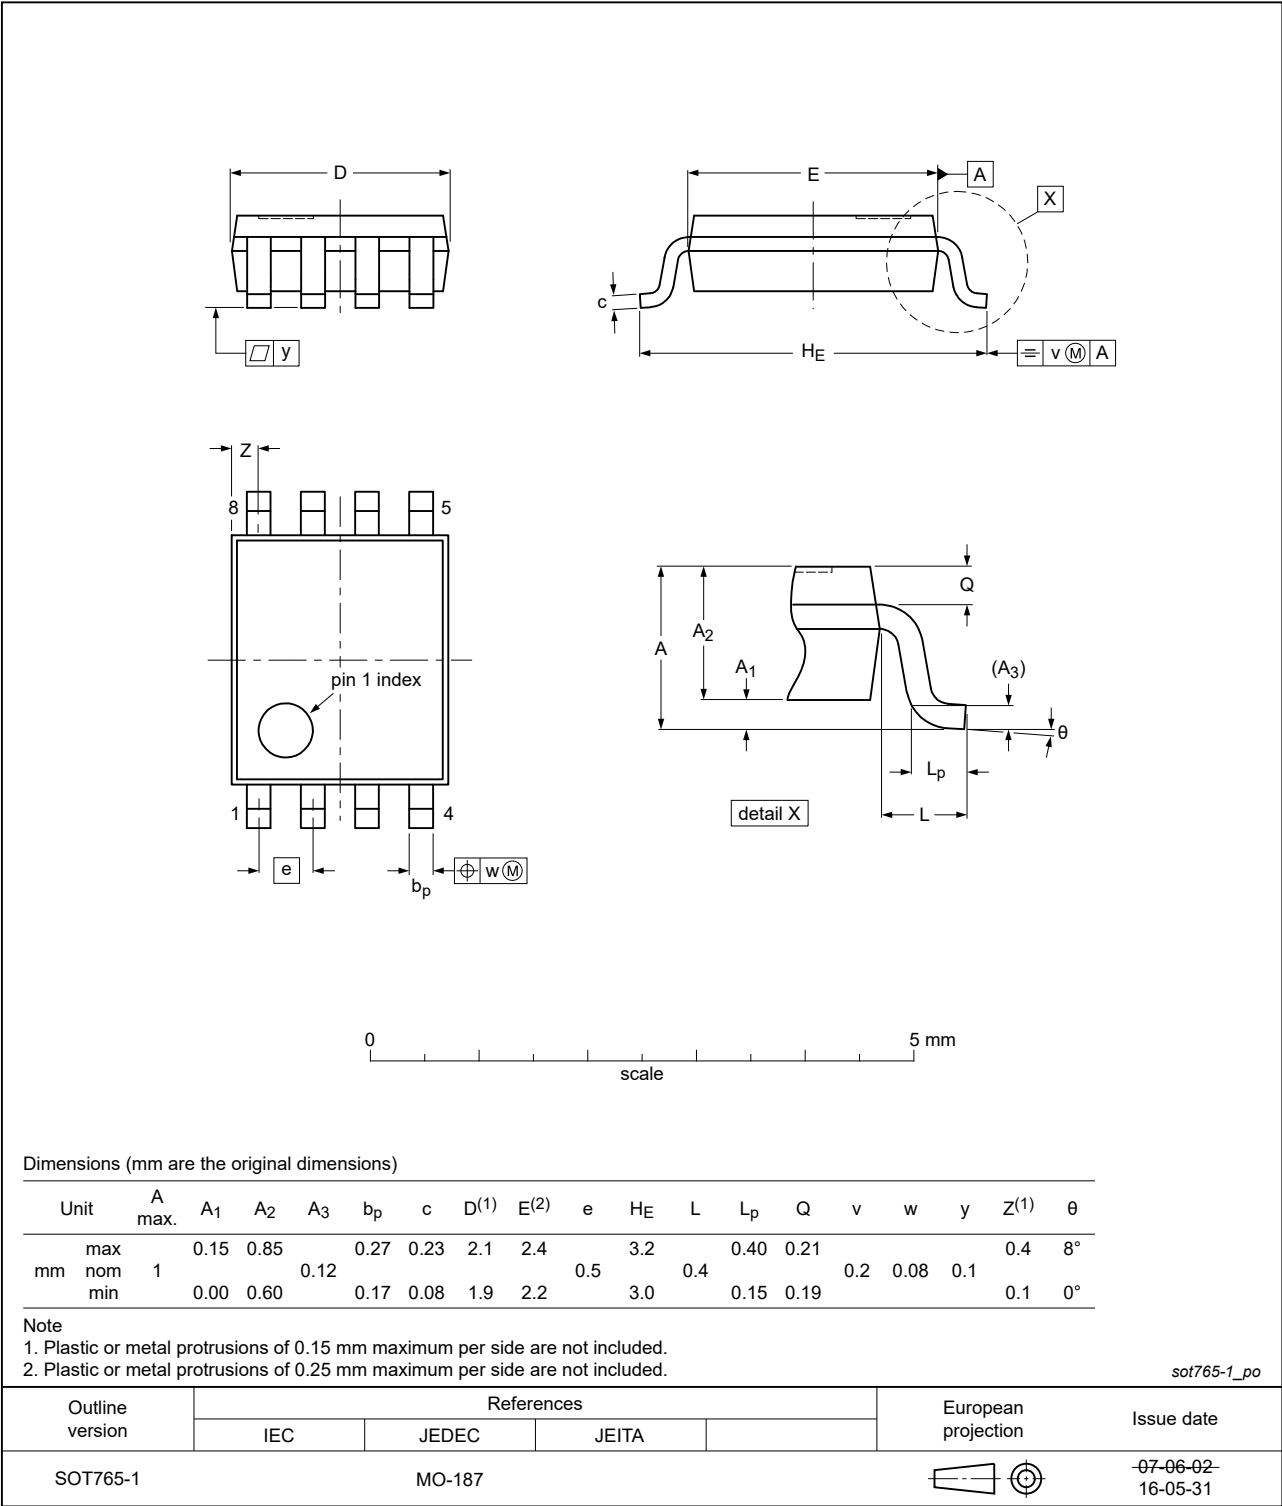


Fig. 13. Package outline SOT765-1 (VSSOP8)

XSON8: plastic extremely thin small outline package; no leads; 8 terminals; body 1 x 1.95 x 0.5 mm

SOT833-1

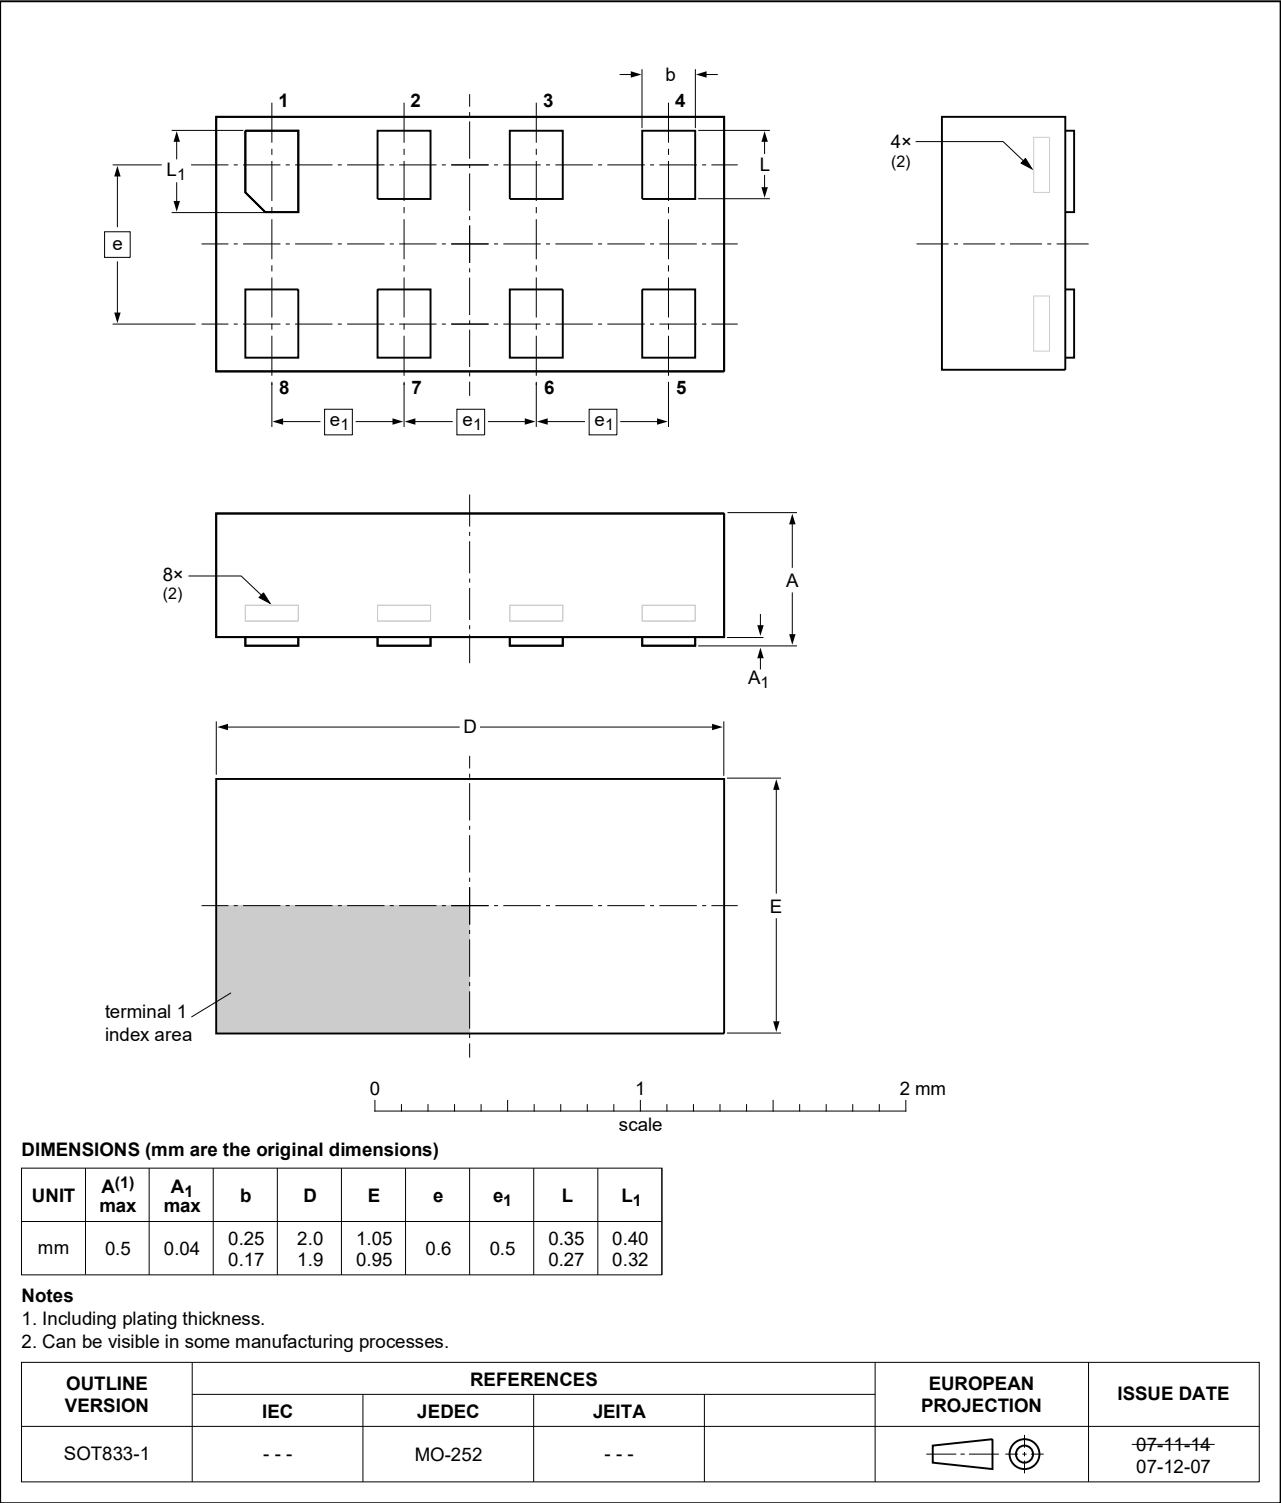


Fig. 14. Package outline SOT833-1 (XSON8)

XSON8: extremely thin small outline package; no leads;  
8 terminals; body 1.2 x 1.0 x 0.35 mm

SOT1116

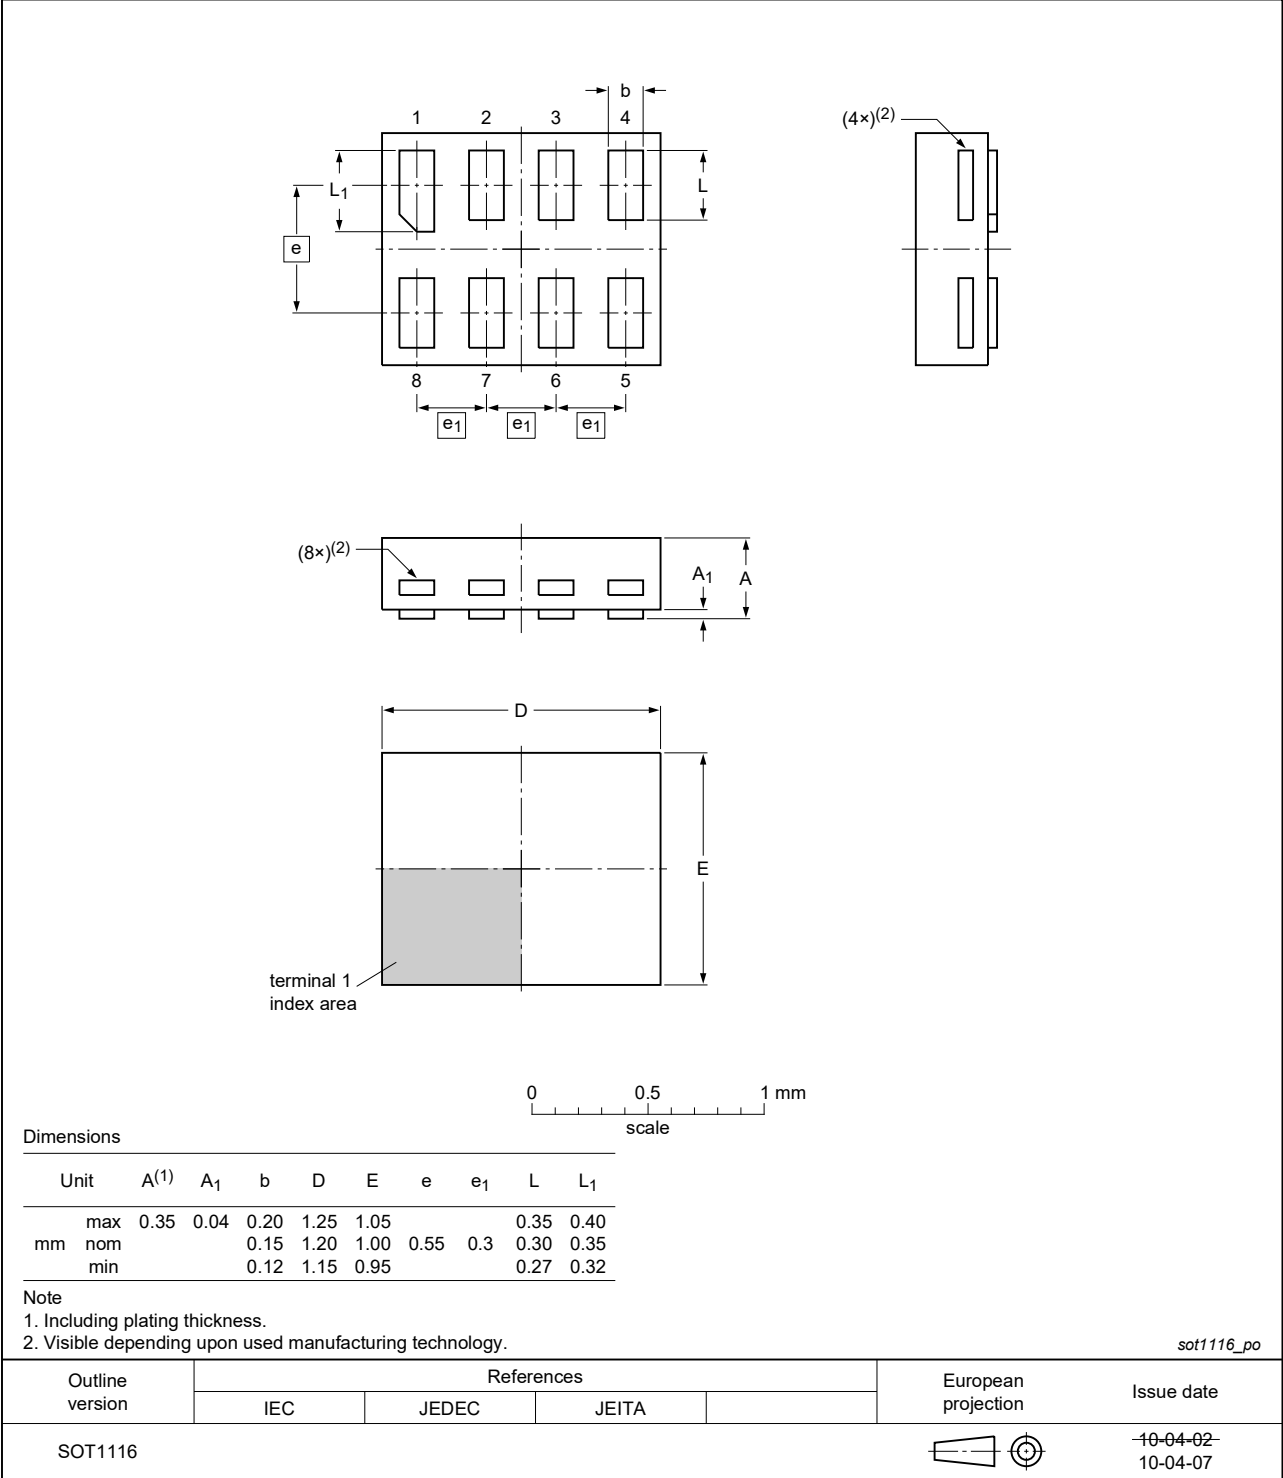


Fig. 15. Package outline SOT1116 (XSON8)

XSON8: extremely thin small outline package; no leads;  
8 terminals; body 1.35 x 1.0 x 0.35 mm

SOT1203

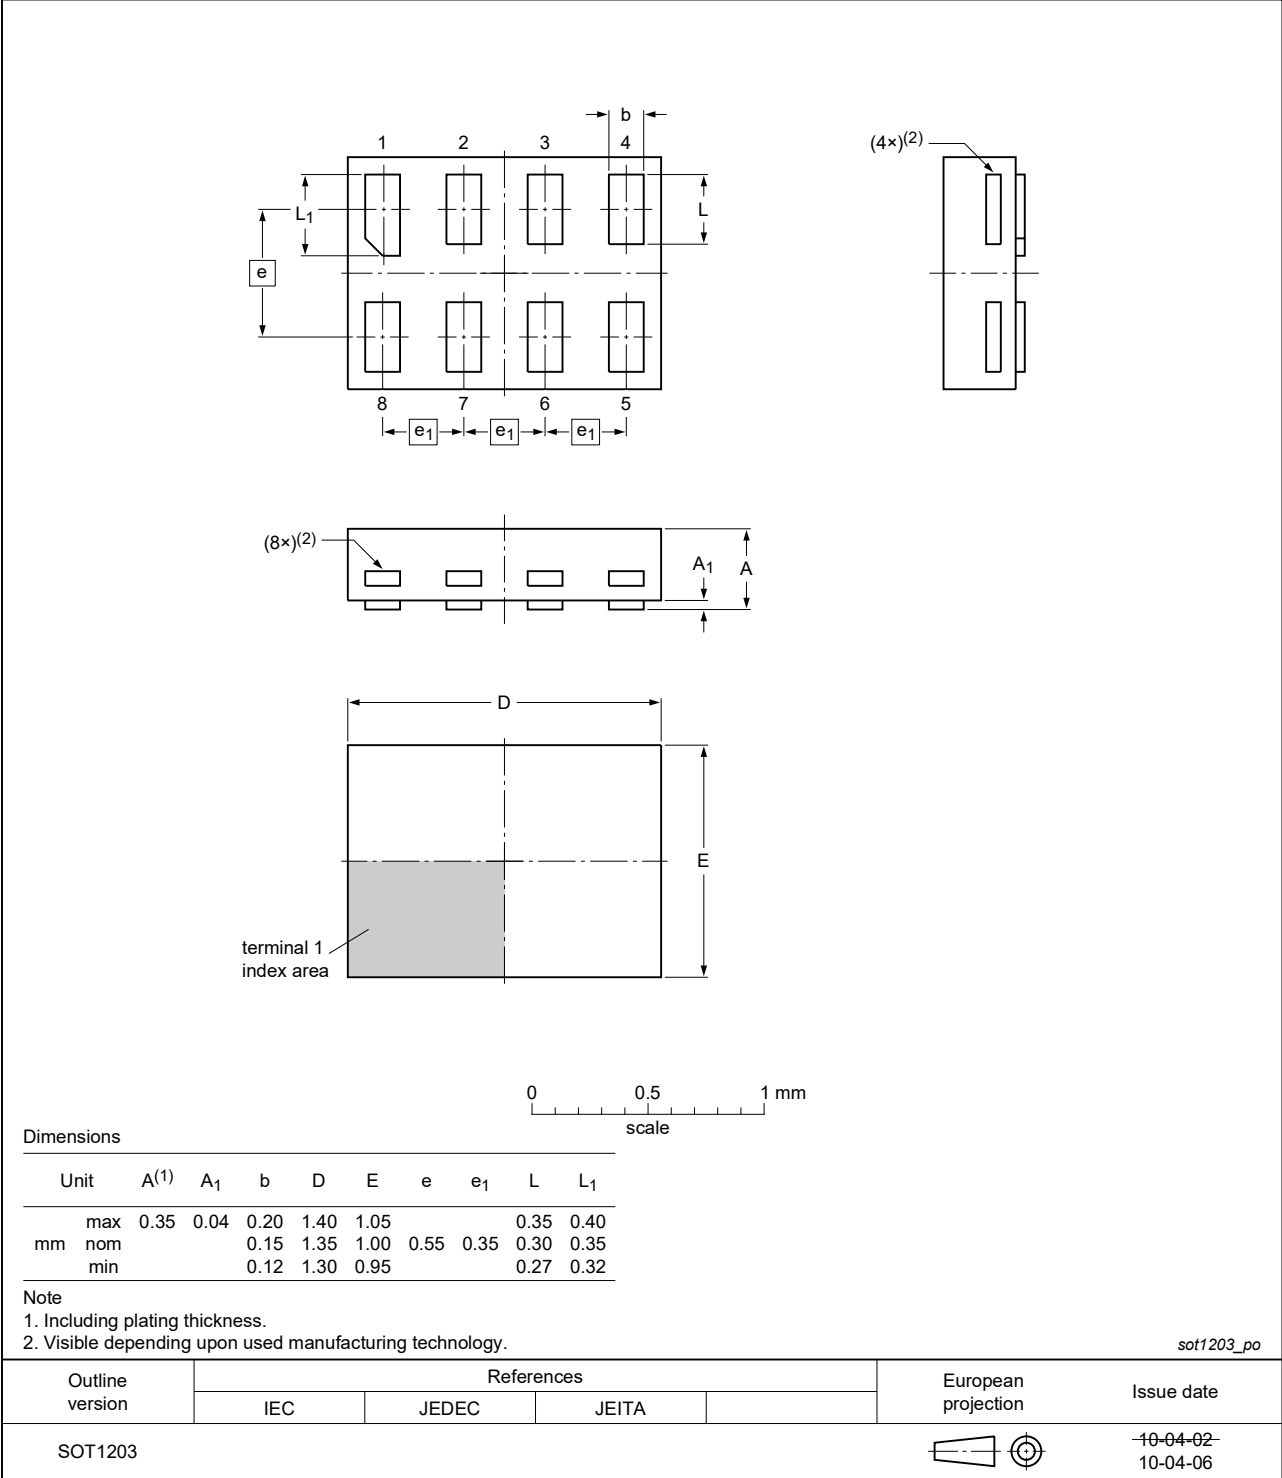


Fig. 16. Package outline SOT1203 (XSON8)

15. Abbreviations

Table 12. Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CDM     | Charged Device Model                    |
| CMOS    | Complementary Metal-Oxide Semiconductor |
| DUT     | Device Under Test                       |
| ESD     | ElectroStatic Discharge                 |
| HBM     | Human Body Model                        |
| TTL     | Transistor-Transistor Logic             |

16. Revision history

Table 13. Revision history

| Document ID    | Release date                                                                                                                                                                                                                           | Data sheet status  | Change notice | Supersedes     |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------|----------------|
| 74LVC3G14 v.18 | 20240501                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.17 |
| Modifications: | • Type number 74LVC3G14GF (SOT1089/XSON8) removed.                                                                                                                                                                                     |                    |               |                |
| 74LVC3G14 v.17 | 20230802                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.16 |
| Modifications: | • <a href="#">Section 2</a> : ESD specification updated according to the latest JEDEC standard.                                                                                                                                        |                    |               |                |
| 74LVC3G14 v.16 | 20190731                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.15 |
| Modifications: | • Type number 74LVC3G14GM (SOT902-2/XQFN8) removed.<br>• <a href="#">Table 5</a> : Derating values for P <sub>tot</sub> total power dissipation updated.                                                                               |                    |               |                |
| 74LVC3G14 v.15 | 20190103                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.14 |
| Modifications: | • The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.<br>• Legal texts have been adapted to the new company name where appropriate.<br>• Type number 74LVC3G14GD (SOT996-2) removed. |                    |               |                |
| 74LVC3G14 v.14 | 20161215                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.13 |
| Modifications: | • <a href="#">Table 7</a> : The maximum limits for leakage current and supply current have changed.                                                                                                                                    |                    |               |                |
| 74LVC3G14 v.13 | 20160315                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.12 |
| Modifications: | • <a href="#">Fig. 11</a> added (typical K-factor for relaxation oscillator).                                                                                                                                                          |                    |               |                |
| 74LVC3G14 v.12 | 20130409                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.11 |
| Modifications: | • For type number 74LVC3G14GD XSON8U has changed to XSON8.                                                                                                                                                                             |                    |               |                |
| 74LVC3G14 v.11 | 20120706                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.10 |
| Modifications: | • For type number 74LVC3G14GM the SOT code has changed to SOT902-2.                                                                                                                                                                    |                    |               |                |
| 74LVC3G14 v.10 | 20111123                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.9  |
| Modifications: | • Legal pages updated.                                                                                                                                                                                                                 |                    |               |                |
| 74LVC3G14 v.9  | 20110922                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.8  |
| 74LVC3G14 v.8  | 20100819                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.7  |
| 74LVC3G14 v.7  | 20080612                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.6  |
| 74LVC3G14 v.6  | 20080207                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.5  |
| 74LVC3G14 v.5  | 20071005                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.4  |
| 74LVC3G14 v.4  | 20070314                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.3  |
| 74LVC3G14 v.3  | 20050131                                                                                                                                                                                                                               | Product data sheet | -             | 74LVC3G14 v.2  |

## 17. Legal information

### Data sheet status

| Document status [1][2]         | Product status [3] | Definition                                                                            |
|--------------------------------|--------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1. General description..... 1

2. Features and benefits..... 1

3. Applications..... 1

4. Ordering information.....2

5. Marking.....2

6. Functional diagram.....2

7. Pinning information.....3

7.1. Pinning.....3

7.2. Pin description.....3

8. Functional description..... 3

9. Limiting values..... 4

10. Recommended operating conditions.....4

11. Static characteristics.....5

11.1. Transfer characteristics.....5

11.2. Waveforms transfer characteristics.....6

12. Dynamic characteristics..... 7

12.1. Waveforms and test circuit..... 7

13. Application information..... 9

14. Package outline..... 10

15. Abbreviations..... 15

16. Revision history..... 15

17. Legal information.....16

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 1 May 2024