Series A3000, LP3000 & CB3000

Single Row Terminal Blocks

SPECIFICATIONS

Rating: A3: 30A, 600V* #12-22 AWG
LP3: 30A, 150V #12-22 AWG
CB3: 30A, 600V #12-22 AWG
Wire Range: #12-22 AWG CU
Center Spacing: 0.437" or 7/16" (11.10mm)
Screw Size: #6-32 zinc-plated philslot screws.
Torque Rating: 9 lb-in.
Base: Standoffs standard for easy flux washing.
Distance Between Barriers: 0.32" (8.1mm)
Recommended PCB Hole Diameter: 0.076" (1.93mm)
Operating Temperature: 105°C (221°F) max., -40°C (-40°F) min.
Molded Material: Black, UL Rated 94V0 Thermoplastic
Breakdown Voltage: 3500V (A3 & LP3); 8200V (CB3)
Agency Information: UL File E62622, CSA 47235; IEC Compliance, CE Certified

*30A Rating achieved with a #10 copper wire crimped to a ring terminal; 20 Rating without ring terminal.

	MOUNTING ENDS ONLY		BARRIER & MOUNTING ENDS	BARRIER ENDS ONLY
Poles	A Mount Ctrs.	C Length	B Pole Ctrs.	C Length
02	1.31	1.73	0.43	0.98
03	1.75	2.17	0.87	1.43
04	2.18	2.61	1.31	1.87
05	2.62	3.05	1.75	2.31
06	3.06	3.48	2.18	2.75
07	3.50	3.92	2.62	3.18
08	3.93	4.36	3.06	3.62
09	4.37	4.80	3.50	4.06
10	4.81	5.23	3.93	4.50
11	5.25	5.67	4.37	4.93
12	5.68	6.11	4.81	5.37
13	6.12	6.55	5.25	5.81
14	6.56	6.98	5.68	6.25
15	7.00	7.42	6.12	6.68
16	7.43	7.86	6.56	7.12
17	7.87	8.30	7.00	7.56
18	8.31	8.73	7.43	8.00
19	8.75	9.17	7.87	8.43
20	9.18	9.60	8.31	8.87
21	9.62	10.05	8.50	9.31
22	10.06	10.48	9.18	9.75
23	10.50	10.92	9.62	10.18
24	10.93	11.36	10.06	10.62
25	11.37	11.80	10.50	11.06
26	11.81	12.23	10.93	11.50
27	–	–	11.37	11.93
28	–	–	11.81	12.37

Dimensions in inches. To convert to millimeters, multiply by 25.4.

Dimesions - in (mm)

A3000 & LP3000 Series

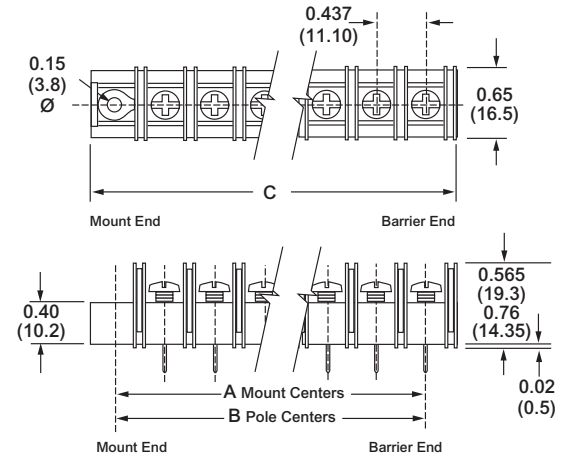

CB3000 Series

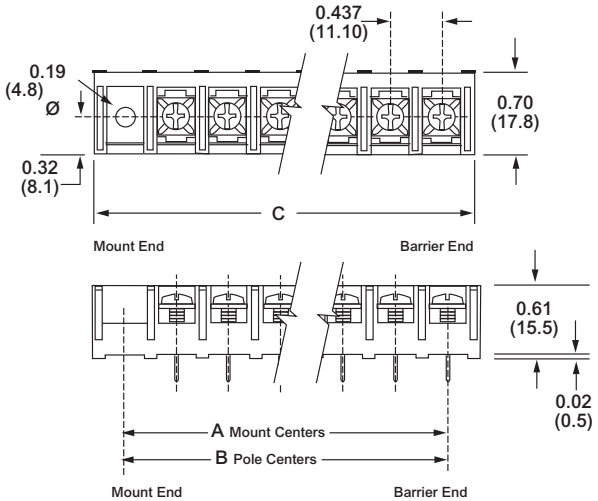

COOPER Bussmann

Series A3000 & LP3000

Single Row Terminal Blocks

Part Numbering System

Series	Terminal Style	Base/End (Views pg. 15)	Poles	Screw Options	Options
A3 LP3	☐☐	☐	☐☐	☐☐☐☐	☐☐☐
A3 - standard barrier **LP3** - low profile barrier	**01** - handwired **02** - printed circuit **03** - non feed-thru **04** - wire wrap tail **05** - extended handwired **06** - handwired **07** - extended pin **08** - printed circuit **09** - 0.250 QC short **10** - 0.187 QC **14** - printed circuit **19** - 0.250 QC long	**1** - flat base/mnt. end **2** - flat base/barrier end **3** - insulator base/mnt. end **4** - insulator base/barrier end *__5__ - closed base/mount end	**02** to **28** **02** to **26** on mount end base	Blank - std. screw **00** - screws shipped bulk **03** - stainless steel **04** - brass nickel-plated **07** - steel SEMS zinc-plated (not available with hardware options) **09** - brass SEMS nickel-plated (not available with hardware options) **07WR** - steel SEMS wire ready (A3 only) **CA** - captive screw	**AB** - angle mnt. options (pg 15) **A1** to **A9** - 0.250" QC **B1** to **B9** - 0.187" QC **DR** - drilled right angle (pg 15) †**J201** - flat slip-on jumper **L1** to **L6** marking options (pg 22) **MP, MP8** & **MT** mounting plates (pg 15) †**OJ3, OJ5** & **OJ7** - over barrier jumpers **RC** - retaining clips (pg 15) **R30** to **R77** - right angle bends (pg 15) **SO** - stand off insulators (pg 15) **S1** - solder lug/flat

*Base/End Note: 5 Style only available with 03 terminals.

ready (A3 only)

†Contact factory for configuration.

Terminal Styles

Inches (Millimeters)



01
Handwired



02
Printed Circuit

03
Non Feed-Thru



04
Wire Wrap Tail



05
Extended Handwired



06
Handwired



07
Extended Pin



08
Printed Circuit



09
0.250˝ QC Short



10
0.187˝ QC



14
Printed Circuit



19
0.250˝ QC Long

Screw Options

Standard
Zinc-Plated Steel

03
Stainless Steel

04
Brass
Nickel-Plated



07
Steel SEMS
Zinc-Plated
(F523-J)



09
Brass SEMS
Nickel-Plated

07WR
Wire Ready
(A3 only)

Series A3000 & LP3000

Single Row Terminal Blocks *Continued*

Hardware Options (Bulk ordering part numbers are in parentheses.)

Inches (Millimeters)

Solder Lugs



S1
(2S1-J)

†**J201**
Flat slip-on
(**J201-J**)

Jumpers

†**OJ3**
(OJ3-J)

†**OJ7**
LP3 Only
(OJ7-J)

†**OJ5**
(OJ5-J)

Quick Connects
Blade Width A = 0.250" Blade Width B = 0.187"



A1 & **B1**
(2A1-J & **2B1-J)**



A2 & **B2**
(2A2-J & **2B2-J)**



A3 & **B3**
(2A3-J & **2B3-J)**



A4 & **B4**
(2A4-J & **2B4-J)**



A5 & **B5**
(2A5-J & **2B5-J)**



A6 & **B6**
(2A6-J & **2B6-J)**



A7 & **B7**
(2A7-J & **2B7-J)**



A8 & **B8**
(2A8-J & **2B8-J)**



A9 & **B9**
(2A9-J & **2B9-J)**

†Contact factory for pole configuration.

Base/End Options

Inches (Millimeters)





1, 3 & 5 Mount End

COOPER Bussmann

Series A3000 & LP3000

Single Row Terminal Blocks *Continued*

Mounting Options

Inches (Millimeters)

Right Angle Bends (A3, LP3 only)

Right angle terminals are offered on the A3000 & LP3000 Series. Configurations are defined in these dimensions: X = pin extension beyond the block base; Z = length from block base to centerline of the terminal tip. Standard bends consist of the X and Z dimensions shown in the chart. Specify by adding the selected Bend Option Code to the terminal part number.

04 Terminal Bend Configurations



Bend Option Code	X (minimum)	Z	Available w/insulator base
R30	0.04	0.28	No
R35	0.01	0.23	No
R36	0.02	0.22	No
R39	0.05	0.19	No
R42	0.08	0.16	No
R46	0.12	0.12	No
R48	0.14	0.10	No
R50	0.16	0.08	No

07 Terminal Bend Configurations



Bend Option Code	X (minimum)	Z	Available w/insulator base
R30	0.04	0.55	Yes
R35	0.01	0.50	Yes
R36	0.02	0.49	Yes
R50	0.16	0.35	No
R53	0.19	0.32	No
R66	0.32	0.19	No
R69	0.35	0.16	No
R75	0.41	0.10	No
R77	0.43	0.08	No

Dimensions in inches. To convert to millimeters, multiply by 25.4.

Angle Brackets (A3, LP3 only)

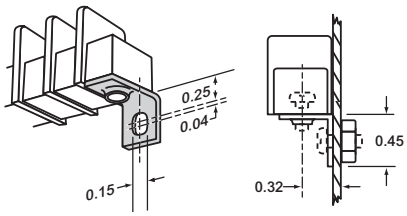

Option AB
Angle brackets enable block to be fastened at right angles to normal mount position. Bulk part number **2AB-J**.

Drilled Right Angle (A3, LP3 only)

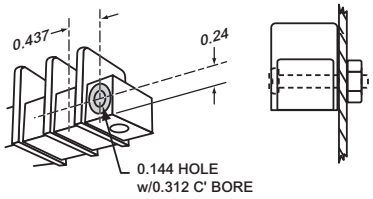

Option DR
Counterbored holes across mount ends of block enable fastening with two screws at right angles to normal mount position.

Mounting Plates

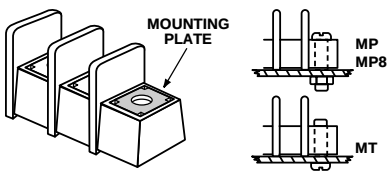

Options MP, MP8 & MT
MP Metal inserts with 0.150" dia. hole accept #6 screw. **MP8** Metal inserts with 0.187" dia. hole accept #8-32 screw. **MT** Metal inserts with tapped hole accept #6-32 screw.

Standoffs

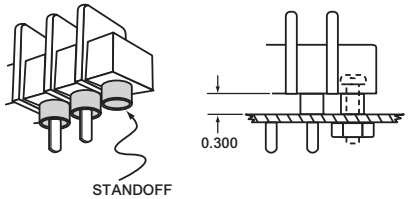

Option SO
Standoff mounts are tubes molded to the mounting positions. Available with insulator bases only.

Retaining Clip

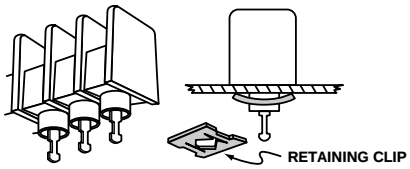

Option RC
Use on standoff tubes. Fit panels up to 0.125" thick. Two clips for every five positions. Supplied unassembled. Bulk part number **H541-J**.

Series CB3000
Single Row Terminal Blocks

Part Numbering System

Series	Terminal Style	Base/End	Poles	Screws	Options
CB3	☐☐	☐	☐☐	☐☐☐☐	☐☐☐
CB3 - closed back	**01** - handwired #6-32 screw **02** - printed circuit #6-32 screw **03** - non feed-thru #6-32 screw **07** - extended pin #6-32 screw **14** - printed circuit #6-32 screw **51** - handwired #8-32* **52** - printed circuit #8-32* **53** - non feed-thru #8-32* **57** - extended pin #8-32* **64** - printed circuit #8-32* *Note: #8-32 screw is a special with #6-32 head.	**1** - mount end **2** - barrier end **5** - closed base/ mount end Base/End Note: 5 Style only available with 03 terminals.	**02** to **28** **02** to **26** on mount end base	**07** - steel SEMS (standard) **09** - brass SEMS nickel-plated **CA** - SEMS captive	**AB** - angle mounting brackets (pg 17) **A7** to **A9** - 0.250" QC **B7** to **B9** - 0.187" QC **EB** - exit back terminals **L1** to **L6** marking options (pg 22) **LT1** to **LT6** marking options (pg 22) †**OJ3** & **OJ7** - over barrier jumpers **MP, MP8, MT** & **MT8** mtg. plates (pg 17) **S1** - solder lug/flat **Covers** - (pg 23) †Contact factory for configuration.

Terminal Styles
Inches (Millimeters)



01
Handwired #6-32 screw
51
#8-32 screw



02
Printed Circuit #6-32 screw
52
#8-32 screw

03
Non Feed-Thru #6-32 screw
53
#8-32 screw
Available on Mount End (5) only.



07
Extended Pin #6-32 screw
57
#8-32 screw



14
Printed Circuit #6-32 screw
64
#8-32 screw

Screw Options



07
Steel SEMS
Zinc-Plated
(standard)



09
Brass SEMS
Nickel-Plated

**** NOTE: Wire ready screws standard on all terminal styles.***

CB3 Terminal Exit Options
Inches (Millimeters)



Exit Rear (std.)



EB
Exit Back

COOPER Bussmann

Series CB3000
Single Row Terminal Blocks *Continued*

Hardware Options **(Bulk ordering part numbers are in parentheses.)** Inches (Millimeters)

Solder Lugs



S1
(2S1-J)

Jumpers

†**J201**
Flat slip-on
(**J201-J**)

†**OJ3**
(OJ3-J)

†**OJ7**
(OJ7-J)

Quick Connects
Blade Width A = 0.250". Blade Width B = 0.187".



A7 & **B7**
(2A7-J & **2B7-J)**



A8 & **B8**
(2A8-J & **2B8-J)**



A9 & **B9**
(2A9-J & **2B9-J)**

†Contact factory for pole configuration.

Mounting Options Inches (Millimeters)

Right Angle Mounting Bracket

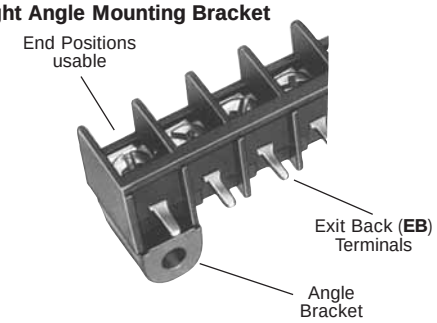

Mounts blocks on PC boards at a right angle.
- Protects solder joints.
- Recommended for all EB (Exit Back) PCB terminal blocks.
- Bracket snaps securely on block (no hardware required).
- Minimum strip length (end positions are usable).
- Mount with #6-32 or #8-32 screws (not supplied).

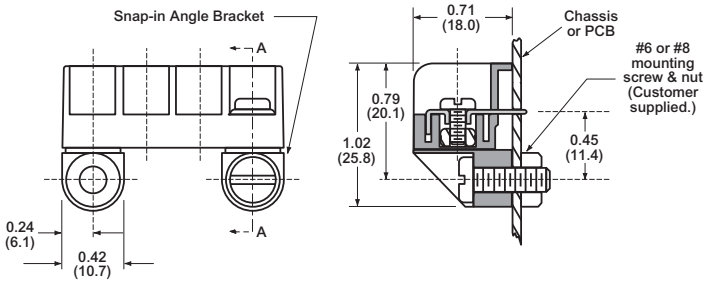

Option AB

Mounting Plates





Options MP, MP8, MT & MT8
MP Metal inserts with 0.150" dia. hole accept #6 screw.
MP8 Metal inserts with 0.187" dia. hole accept #8-32 screw.
MT Metal inserts with tapped hole accept #6-32 screw.
MT8 Metal inserts with tapped hole accept #8-32 screw.

Series A38 / B38

Single Row Terminal Blocks

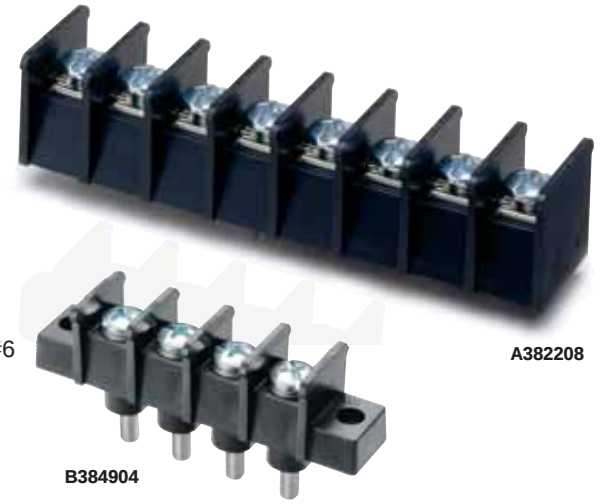

A382208

B384904

SPECIFICATIONS

Rating: A38: 30A, 600V
B38: 50A, 300V
Center Spacing: 0.437" (11.10mm)
Wire Range: A38: #10-22 AWG CU; B38: #8-16 AWG
Screw Size: #8-32 zinc-plated steel
Torque Rating: A38: 9 lb-in; B38: 15 lb-in for #8, 9 lb-in for #6
Base: A38 Only: Standoffs standard for easy flux washing
Distance Between Barriers: 0.378" (9.60mm)
Recommended PCB Hole Diameter (A38): 0.076" (1.93mm)
Operating Temperature: 221°F (105°C)
Molded Material: Black, UL Rated 94V0 Thermoplastic
Breakdown Voltage: 5000V
Agency Information: UL File E62622, CSA File 47235; CE Certified

TABLE A

Poles	MOUNTING ENDS ONLY B Mount Ctrs.	MOUNTING ENDS ONLY "A" Dim. Length	BARRIER ENDS ONLY "A" Dim. Length
02	1.31	1.67	0.93
03	1.75	2.10	1.37
04	2.19	2.54	1.81
05	2.62	2.98	2.25
06	3.06	3.41	2.68
07	3.50	3.85	3.12
08	3.93	4.29	3.56
09	4.37	4.72	3.99
10	4.81	5.16	4.43
11	5.24	5.60	4.87
12	5.68	6.04	5.30
13	6.12	6.47	5.74
14	6.56	6.91	6.18
15	6.99	7.35	6.61
16	7.43	7.78	7.05

* Dimensions in inches. To convert to millimeters, multiply by 25.4.

Dimensions - in (mm)

Series A38

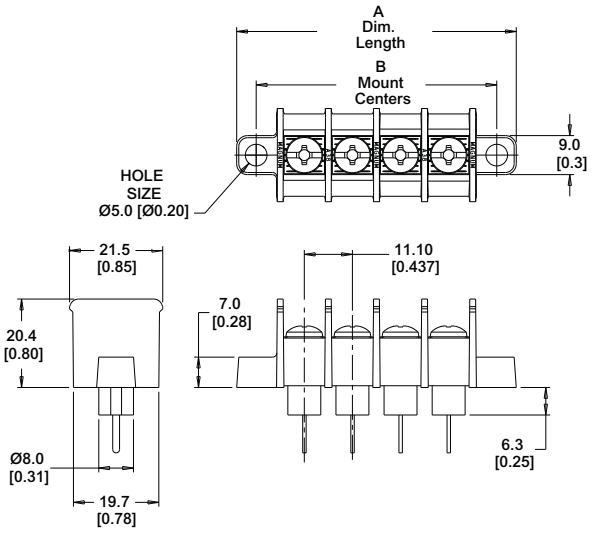

Series B38

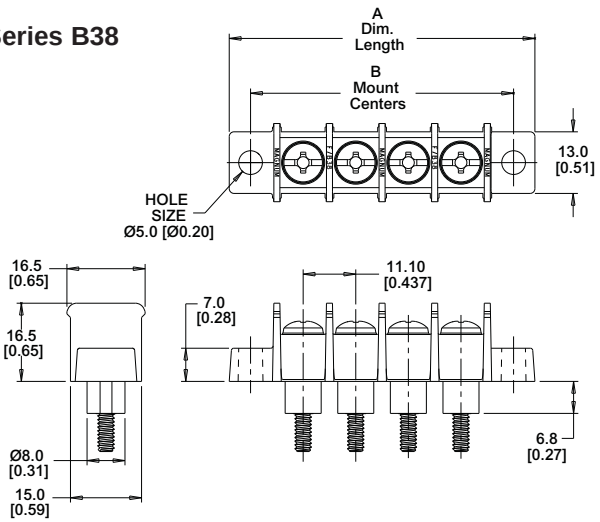

COOPER Bussmann

Part Numbering System

Series	Terminal Style	Base/End	# of Poles	Screw Options	Options
A38	☐	☐	☐☐	☐☐	☐☐
	0 - 0.187˝ QC **1** - hand wired **2** - printed circuit **7** - extended wire wrap **9** - 0.250" QC	**1** - flat base, mount end **2** - flat base, barrier end **3** - insulator base* mount end **4** - insulator base* barrier end *N/A on 2 terminal style.	**02** to **16**	Blank - standard screw (steel zinc-plated, philslot BHMS) **04** - brass, nickel-plated, philslot BHMS **07** - steel, SEMS zinc-plated philslot screw **92** - steel, zinc-plated slotted BHMS **94** - brass, nickel-plated slotted BHMS (Binding Hard Machine Screw)	**L1** to **L6** marking options (pg 22) **RC** - retaining clips (pg 15) **Covers** - (pg 23)
B38	☐	☐	☐☐	☐☐	☐☐
	1 - long turret **2** - short turret **3** - screw terminal #6-32 screw top & bottom) **4** - stud (#8-32 screw top, #6-32 stud bottom) †**5** - double stud (#6-32 stud top & bottom) †C360 Copper alloy (bright tin plate)	**0** - flat base, mount ends **4** - insulator base, barrier ends **9** - insulator base mount ends	**02** to **16**	**Blank** - standard screw steel zinc-plated philslot BHMS) **04** - brass, nickel-plated, philslot BHMS #8-32 *__34__ - #6-32 nickel-plated brass philslot BHMS *Note: 34 screws only *available with 3 terminal style.	**L1** to **L6** marking options (pg 23) **RC** - retaining clips (pg 16)

A38 Terminal Styles **Wire ready screws standard**

Inches (Millimeters)

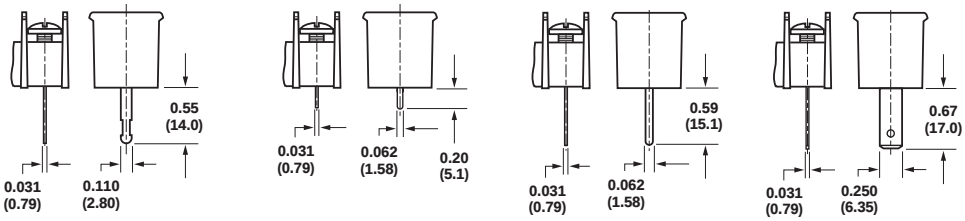

1 Handwired | **2** Printed Circuit | **7** Extended Pin | **9** 0.250" QC

B38 Terminal Styles

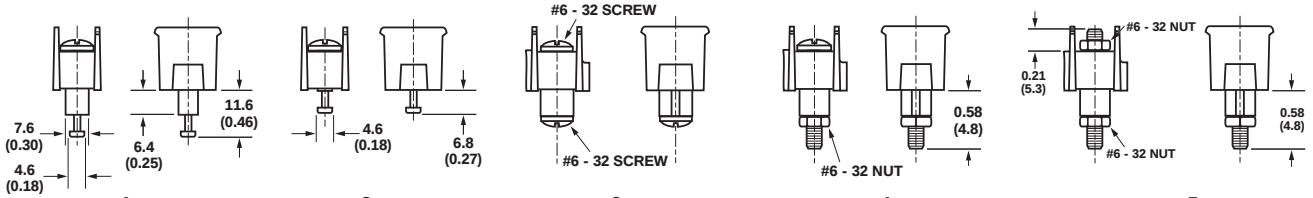

1 Long Turret | **2** Short Turret | **3** Screw Terminal | **4** Stud | **5** Double Stud

Screw Options



Standard Zinc-Plated Steel | **04** Brass Nickel-Plated | **07** Steel SEMS Zinc-Plated | **34** Nickel-Plated Brass Philslot BHMS | **92** Slotted, Zinc-Plated Steel | **94** Slotted, Nickel-Plated Brass