

GT 5

GT 13

GT 16

PO5G

GT 11

GT 17

GT 19

GT 26

GT 27

GT 29

GT 3

GT 6W

GT 10

GT 18W

GT 15

GT 8

GT 9


GT 25

GT 22

GT 24

GT11 Series

— Connectors for shielded cables —

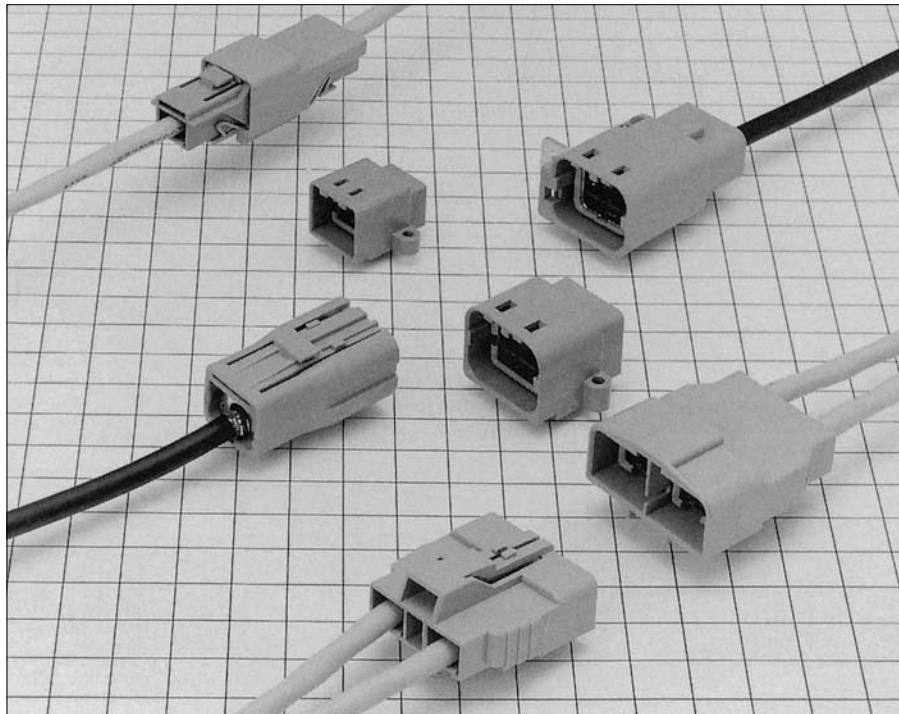


Features

- A housing lance systems has been used to prevent binding between contacts.
- Lock-release latching system

For Double-Conductor shielded cable

F Connectors

Outer terminals

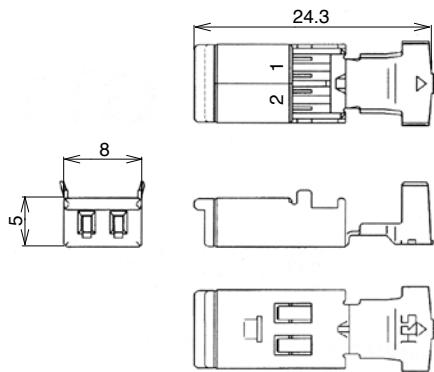


Part Number	HRS No.	Applicable Cable	RoHS
GT11-2S-5.2C(70)	761-0002-3-70	φ 4.5 to 5.2mm	YES
GT11-2S-6.0C(70)	761-0028-7-70	φ 5.8 to 6.2mm	

Item	Material	Color/Finish
Outer terminal	Brass	Tin plating
Insulator	PBT	Dark Gray

Note : The suitable terminals might differ depending on the internal structure of the cable.

Inner terminals

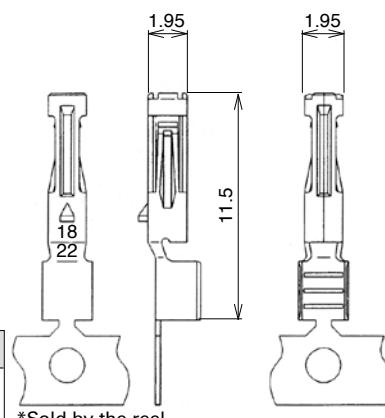


*Sold by the reel.

Part Number	HRS No.	Conductor Size (AWG)	Material	Finish	Packaging	RoHS
GT11-1822SCF(70)	761-0004-9-70	#18 to 22	Phosphor Bronze	Tin plating	8,000 pcs/reel	YES
GT11-2428SCF(70)	761-0020-5-70	#24 to 28				

M Connectors

Outer terminals




Part Number	HRS No.	Applicable Cable	RoHS
GT11-2P-5.2C(70)	761-0001-0-70	φ 4.5 to 5.2mm	YES
GT11-2P-6.0C(70)	761-0027-4-70	φ 5.8 to 6.2mm	


Item	Material	Color/Finish
Outer terminal	Brass	Tin plating
Insulator	PBT	Dark Gray

Note : The suitable terminals might differ depending on the internal structure of the cable.

Inner terminals

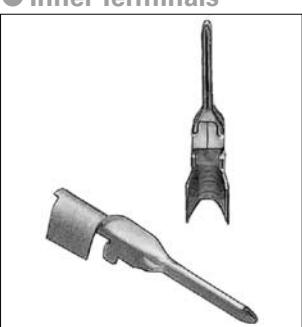





Part Number	HRS No.	Conductor Size (AWG)	Material	Finish	Packaging	RoHS
GT11-1822PCF(70)	761-0003-6-70	#18 to 22	Brass	Tin plating	8,000 pcs/reel	YES
GT11-2428PCF(70)	761-0019-6-70	#24 to 28				

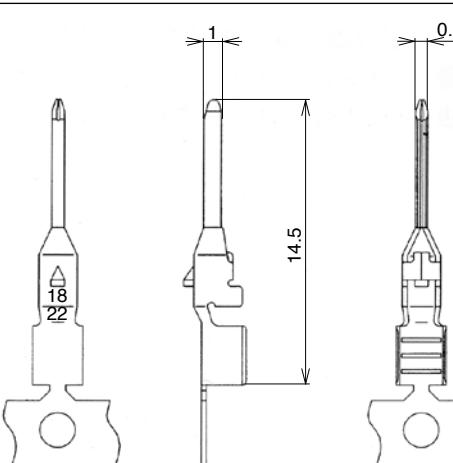


For Double-Conductor shielded cable

F Connectors

Housing

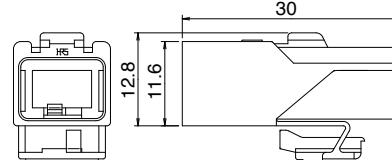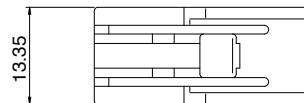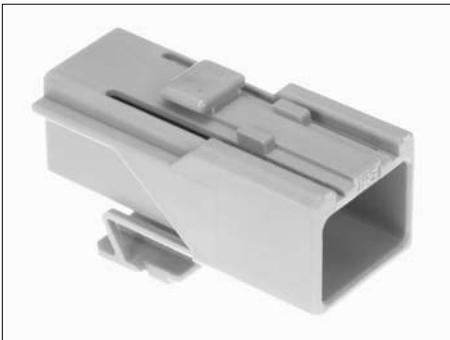

◆ Shown with inserted retainer



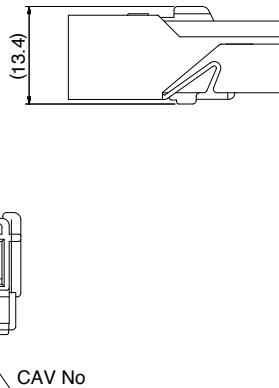


CAV No

Part Number	HRS No.	Material	Color	RoHS
GT11-2S-HU	761-0005-1	PBT	Light Gray	YES

M Connectors

Housing

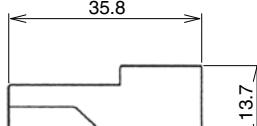

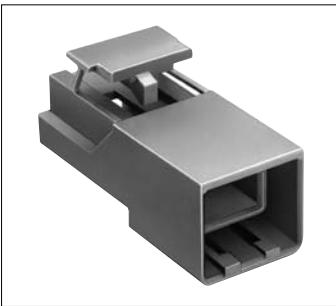


◆ Shown with inserted retainer




Part Number	HRS No.	Material	Color	RoHS
GT11-2P-HU	761-0006-4	PBT	Light Gray	YES


Housing

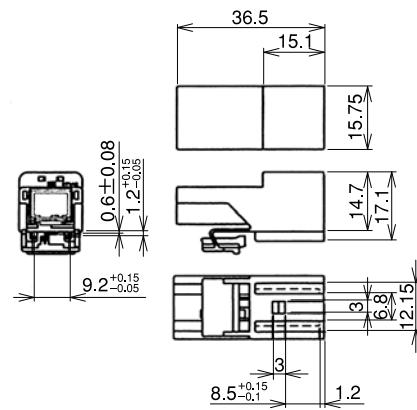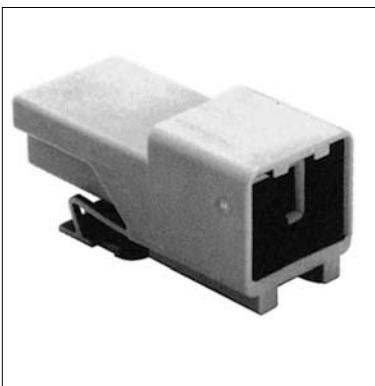

◆ Shown with inserted retainer



◆ Fully mated connector assemblies

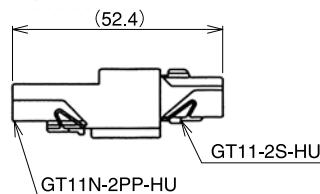



Part Number	HRS No.	Material	Color	RoHS
GT11N-2PP-HU	761-0008-0	PBT	Light Gray	YES

M Connectors



Housing




Recommended Board Mounting Pattern

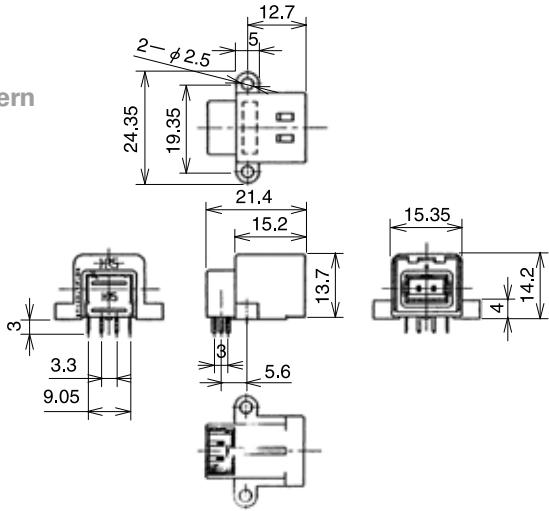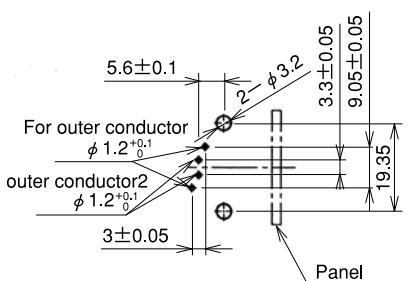


Housing (Gang Type)

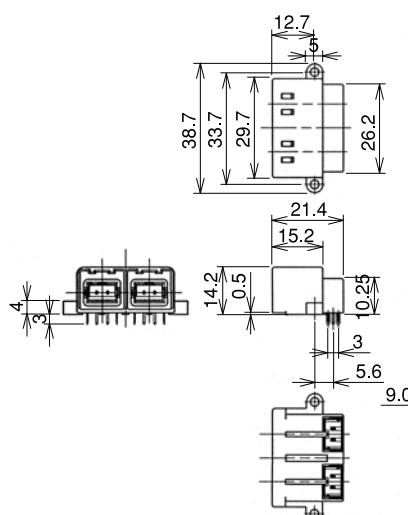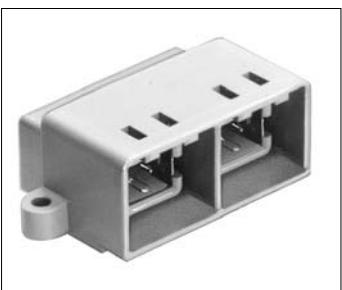


Fully mated connector assemblies

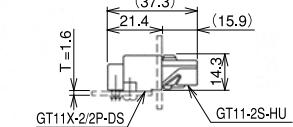


Recommended Panel Cut-out




Recommended Board Mounting Pattern

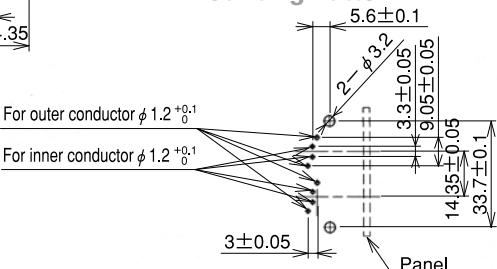


Housing (Straight Type)

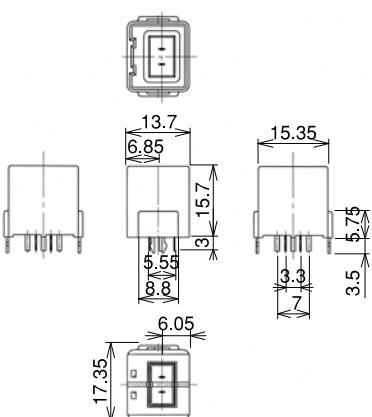

Recommended Board Mounting Pattern

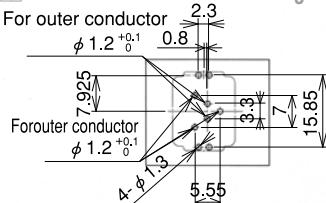

Fully mated connector assemblies


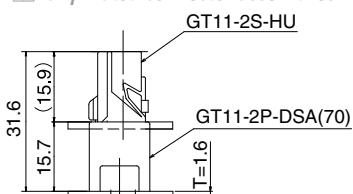


Part Number	HRS No.	Material	Finish	Color	RoHS
GT11-2P-DSA(70)	761-0038-0-70	PBT	—	Light Gray	YES
		Brass	Tin plating	—	
		PBT	—	Dark Gray	
		Phosphor bronze	Tin plating	—	

Waterproof type For Double-Conductor shielded cable

F Connectors





Housing

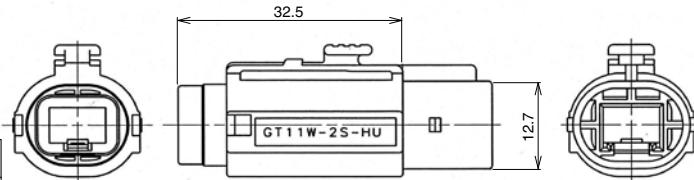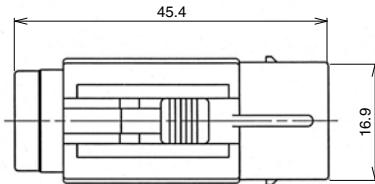


Part Number	HRS No.	Material	Color	RoHS
GT11W-2S-HU	761-0024-6	PBT	Light Gray	YES

M Connectors

Housing


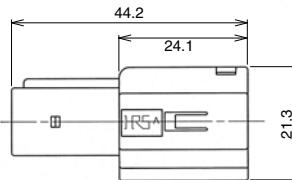
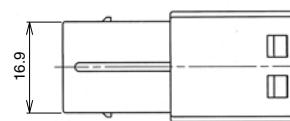



◆Fully mated connector assemblies

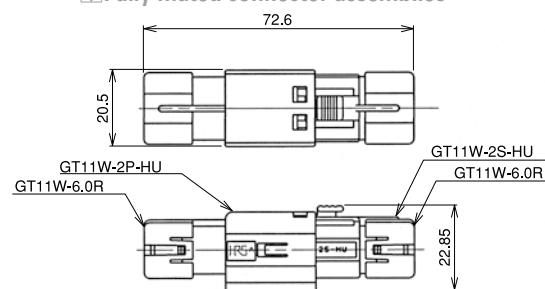


Part Number	HRS No.	Material	Color	RoHS
GT11W-2P-HU	761-0023-3	PBT	Light Gray	YES

Housing

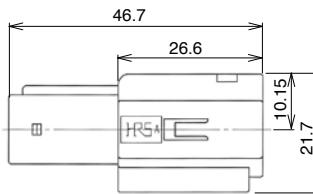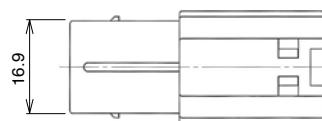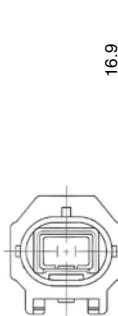


◆Fully mated connector assemblies

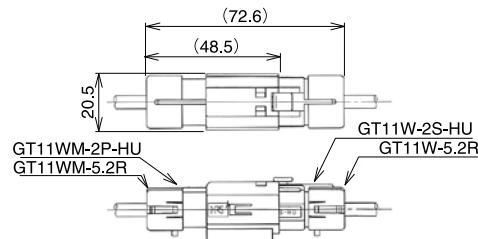


(It is planning)

◆Termination sequence


① Strip the cable.

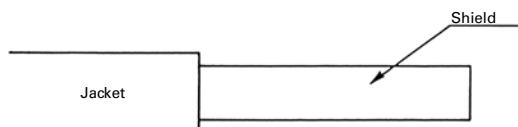


② Cut the shield and expose the wire.

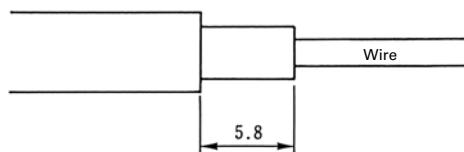


③ Cut back the shield above the jacket and wrap with conductive tape.

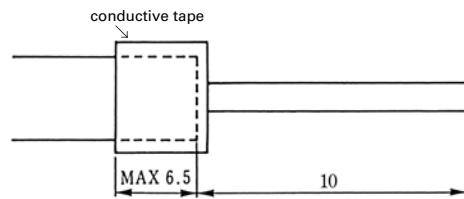

④ Strip the wire and form it.

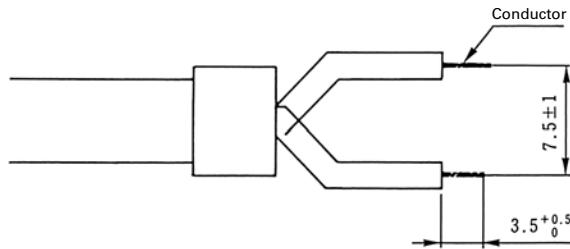


⑤ Crimp the wire to the internal terminal.

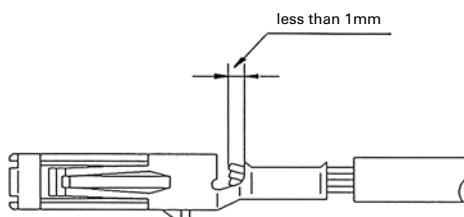


Jig used: Automatic crimping machine.
(Refer to Page 103 for detail.)


⑥ Insert the internal terminals into the Outer terminals.

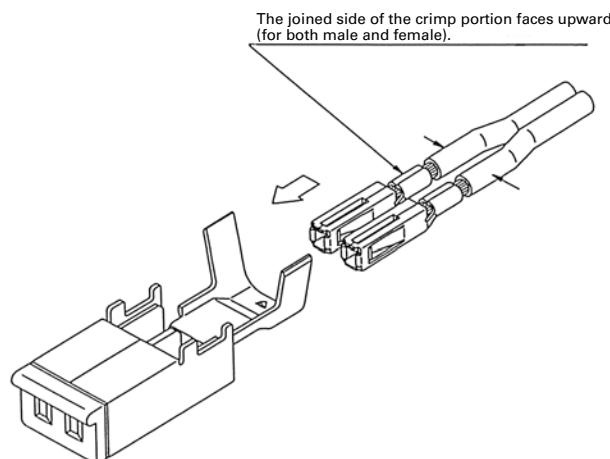


⑦ Crimp the Outer terminal.

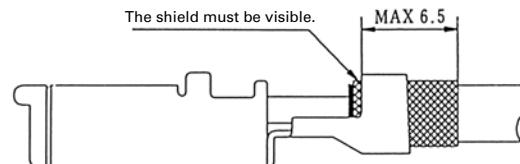

Jig used: Outside tube caulking jig.
(Refer to Page 103 for detail.)

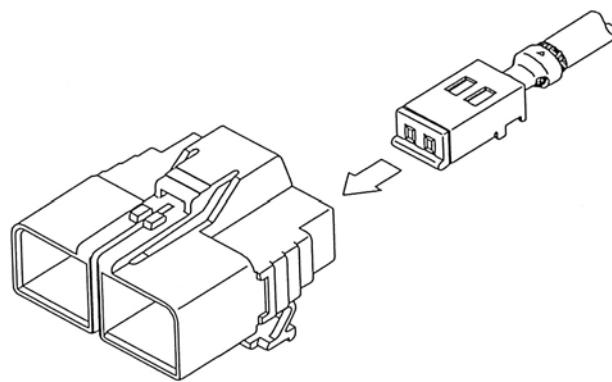


⑨ Mount the retainer to complete the task.

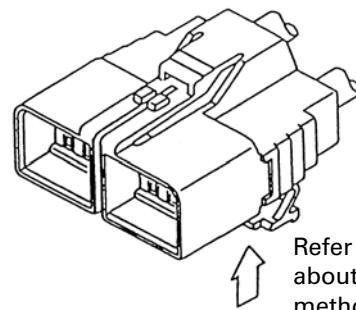


Refer to Page 96 for information about the retainer mounting method.

◆ Retainer Mounting Method


a. Insert so that the terminal locking tab is inserted between the top surface of the terminal and the housing.

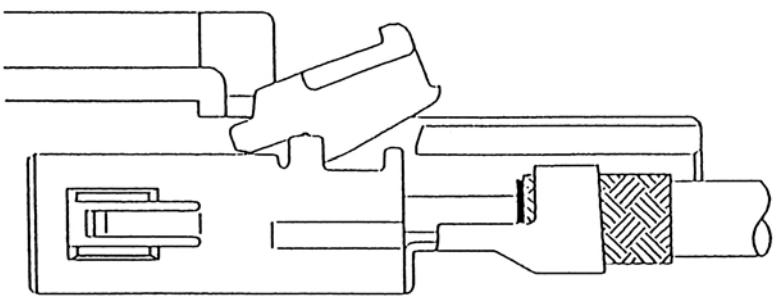


b. Push in while changing the angle of the retainer until the front surface comes to a stop.

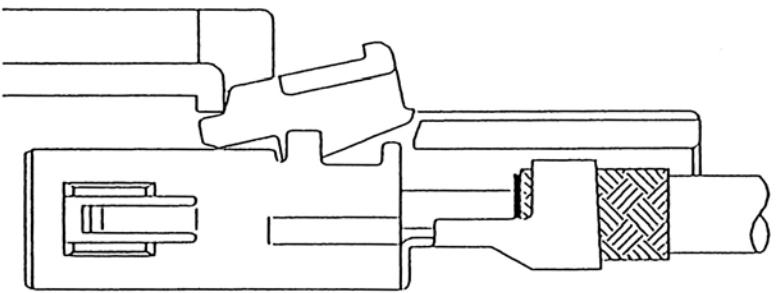

c. Press the rear portion of the retainer and snap it into the locked position.

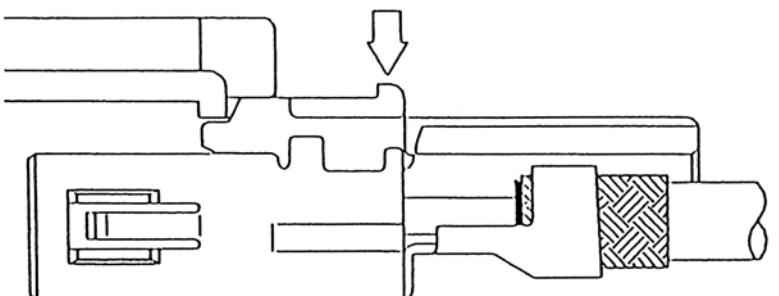

d. If locking is not complete, press the rear portion of the retainer again while pulling it backward.

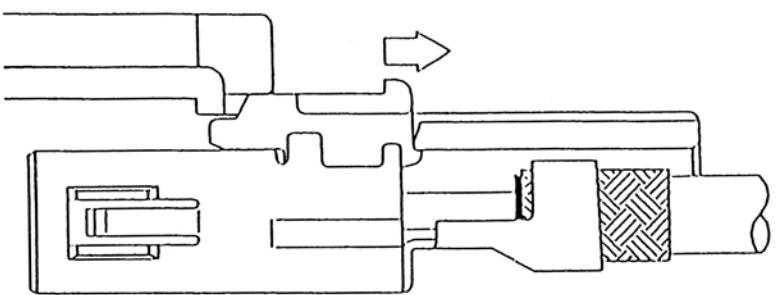


* Check that all locations are locked.

◆ Termination Tools

User's manuals are available. Please ask your Hirose Electric account representative.

● Automatic Crimping Machine (for 2-conductor and 8-conductor cable)

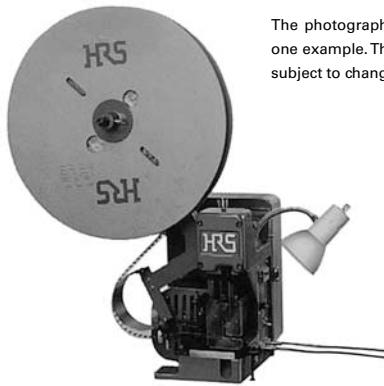

The photograph shows just one example. The product is subject to change.

Part Number CM-105

Note: See the table below for the applicator product number.

Product No.	Applicator Product No. (2 conductor)	Applicator Product No. (8 conductor)
GT11-1822SCF(70)	Applicator 105-GT11-1822S-2	Applicator 105-GT11-1822S
GT11-1822PCF(70)	Applicator 105-GT11-1822P-2	Applicator 105-GT11-1822P
GT11-2428SCF(70)	Applicator 105-GT11-2428S-2	Applicator 105-GT11-2428S
GT11-2428PCF(70)	Applicator 105-GT11-2428P-2	Applicator 105-GT11-2428P

Specifications

Item	Specification	Remarks
Capacity	1.5tons	
Stroke	30mm	
Number of strokes	200spm (50Hz)	200spm (60Hz)
Weight	75kg	
Motor	0.2kW	AC100V
Crimping speed	2000 to 4000 pcs/hour	


● Outer Terminal Crimping tool

Please contact a sales representative for information about the outer terminal crimping tool.

For 8-Conductor shielded cable


F Connectors

● Inner Terminal

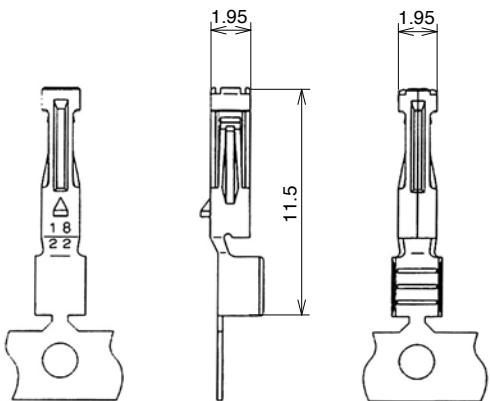


Part Number	HRS No.	Conductor Size (AWG)	Material	Finish	RoHS
GT11-1822SCF(70)	761-0004-9-70	#18 to 22	Phosphor bronze	Tin plating	YES
GT11-2428SCF(70)	761-0020-5-70	#24 to 28	Phosphor bronze	Tin plating	

● Insulator

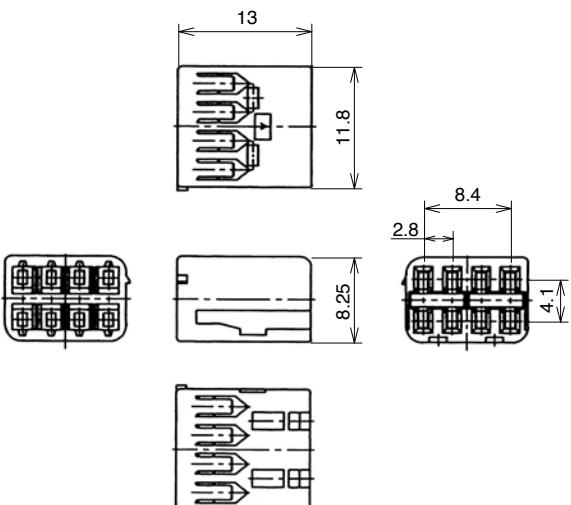



Part Number	HRS No.	Material	RoHS
GT11-8DS-2.8C	761-0014-2	PBT	YES

● Outer terminals

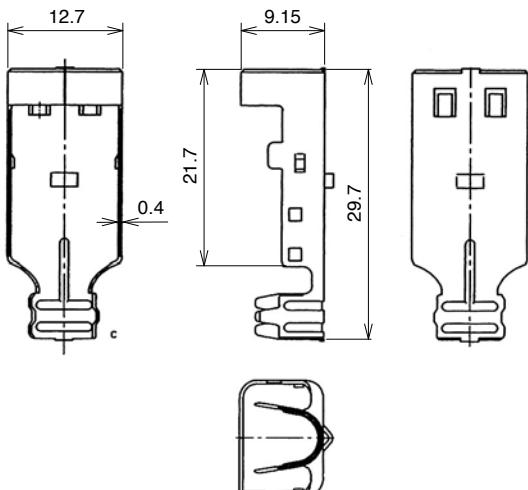


Part Number	HRS No.	Material	Finish	RoHS
GT11-8DS-5C(70)	761-0015-5-70	Brass	Tin plating	YES

● Shield Plate

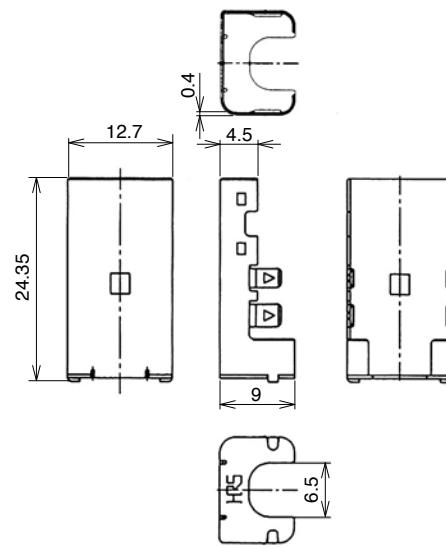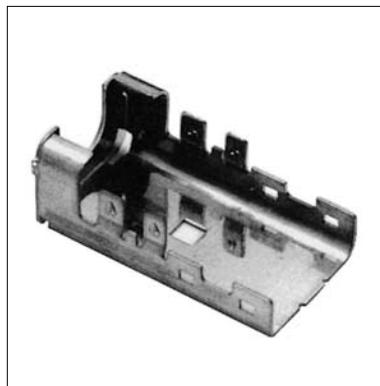


Part Number	HRS No.	Material	Finish	RoHS
GT11-8DS-SB(70)	761-0016-8-70	Brass	Tin plating	YES

● Housing

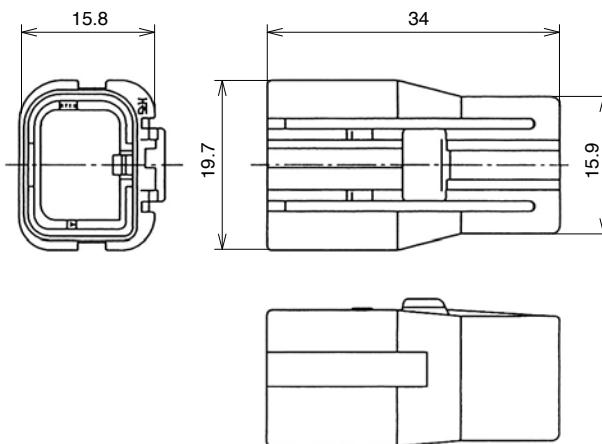

Part Number	HRS No.	Material	RoHS
GT11-8DS-HU	761-0017-0	PBT	YES


● Retainer (used with GT11-8DS-HU)

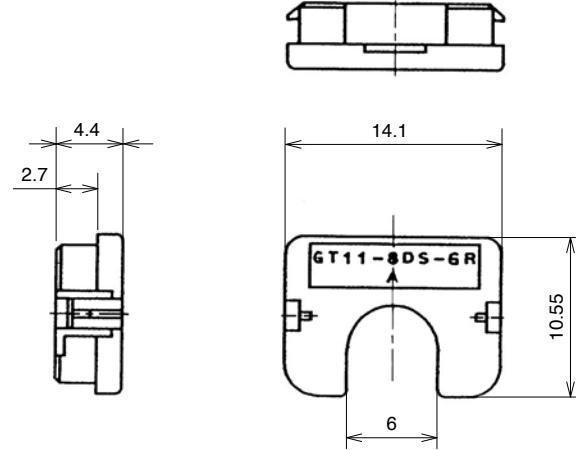

Part Number	HRS No.	Material	RoHS
GT11-8DS-6R	761-0018-3	PBT	YES

M Connectors



Inner Terminals

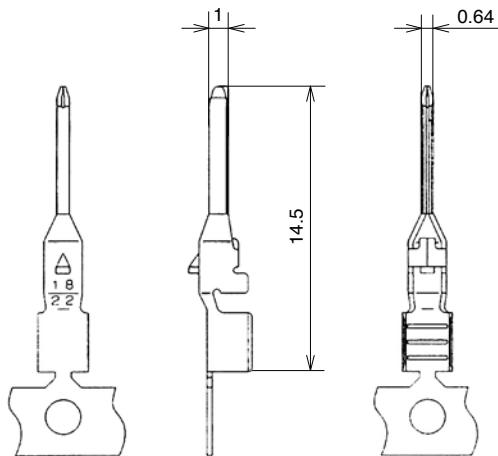

Part Number	HRS No.	Conductor Size (AWG)	Material	Finish	RoHS
GT11-1822PCF(70)	761-0003-6-70	#18 to 22	Brass	Tin plating	YES
GT11-2428PCF(70)	761-0019-6-70	#24 to 28	Brass	Tin plating	


* Sold by the reel (8,000 pcs/reel)

Insulator

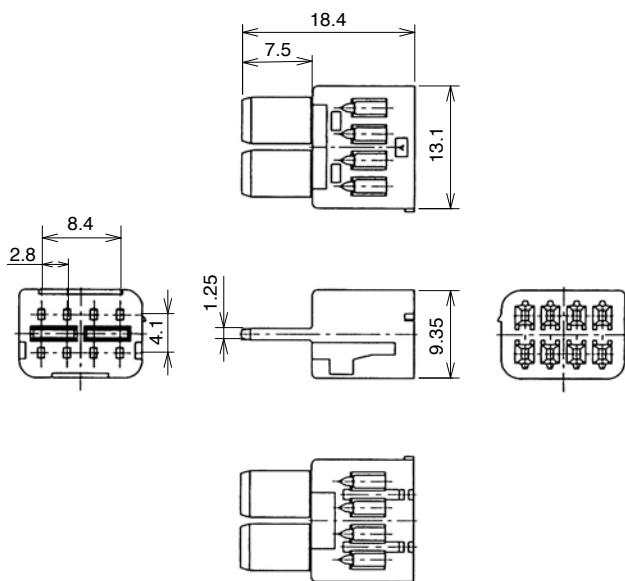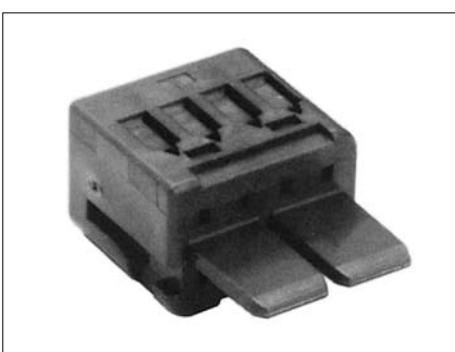




Part Number	HRS No.	Material	RoHS
GT11-8DP-2.8C	761-0009-2	PBT	YES

Outer terminal

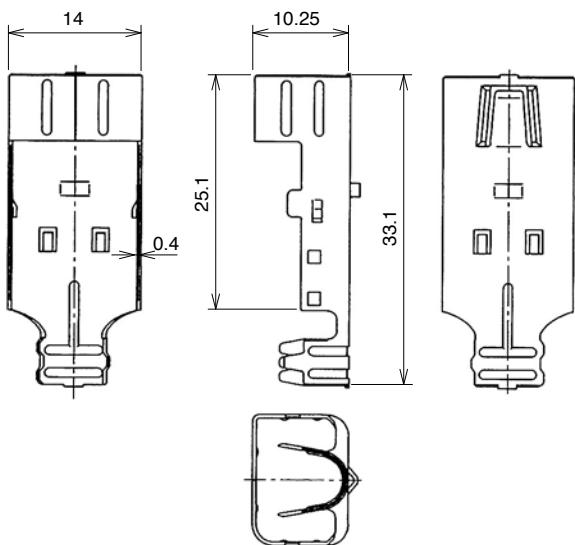


Part Number	HRS No.	Material	Finish	RoHS
GT11-8DP-5C(70)	761-0010-1-70	Brass	Tin plating	YES


● Board Type

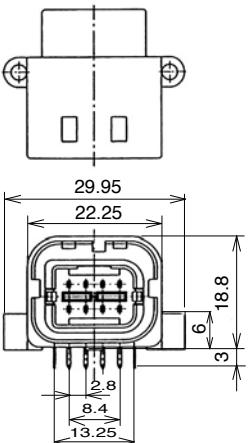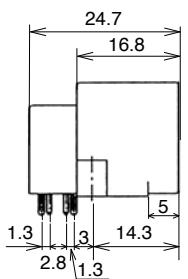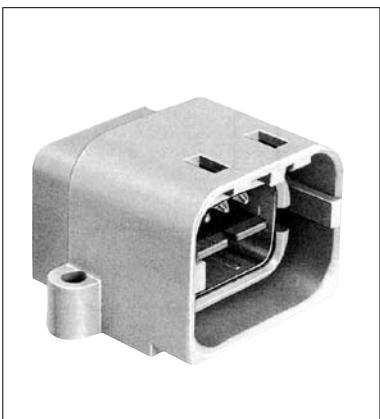

◆ Recommended Board Mounting Pattern

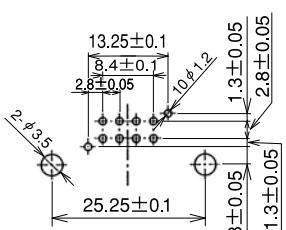


◆ Fully mated connector assemblies

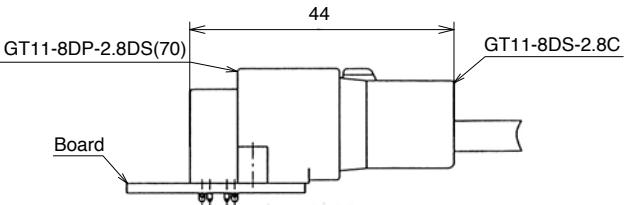


Part Number	HRS No.	Item	Material	Finish	RoHS
GT11-8DP-2.8DS(70)	761-0021-8-70	Housing	PBT		YES
		Outer Terminal	Phosphor bronze	Tin plating	
		Insulator	PBT		
		Terminal	Brass	Tin plating	

◆Termination sequence


① Strip the Jacket.




⑥ Insert the inner terminals into the insulated case.

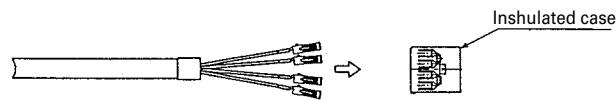


② Cut the shield and expose the wire.




⑦ Insert what was made in Step ⑥ into the Outer terminal.

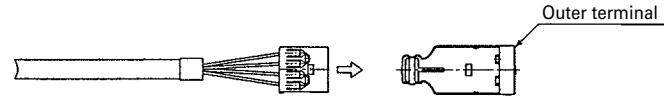


③ Cut back the shield above the jacket and wrap with conductive tape.




⑧ Insert the caulking shield cover onto the Outer terminal.

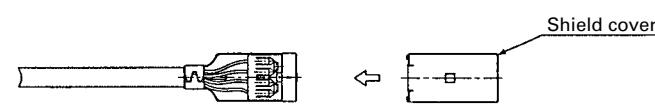


④ Strip the wire.




⑨ Insert what was made in Step ⑧ into the housing.

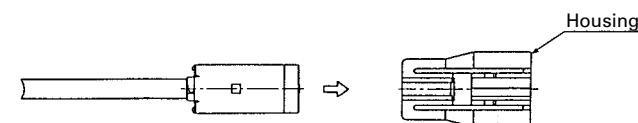

⑤ Crimp the internal terminals.

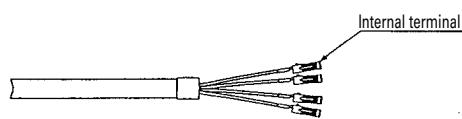


⑩ Insert the retainer.

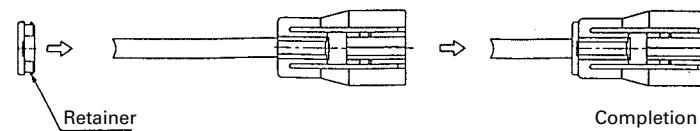

◆Termination Tools

User's manuals are available. Please ask your Hirose Electric account representative.

● Automatic Crimping Machine (for 2-conductor and 8-conductor cable)

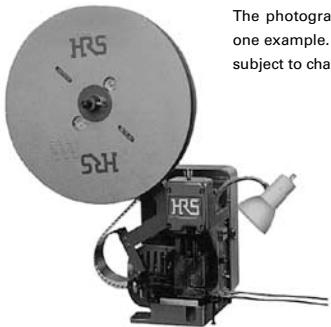

The photograph shows just one example. The product is subject to change.

Part Number CM-105

Specifications

Item	Specification	Remarks
Capacity	1.5Ton	
Stroke	30mm	
Number of strokes	200spm (50Hz)	240spm (60Hz)
Weight	75kg	
Motor	0.2kW	AC100V
Crimping speed	2000 to 4000 pcs. per hour	

Product Number	Applicator Product Number (2-conductor type)	Applicator Product Number (8-conductor type)
GT11-1822SCF(70)	Applicator 105-GT11-1822S-2	Applicator 105-GT11-1822S
GT11-1822PCF(70)	Applicator 105-GT11-1822P-2	Applicator 105-GT11-1822P
GT11-2428SCF(70)	Applicator 105-GT11-2428S-2	Applicator 105-GT11-2428S
GT11-2428PCF(70)	Applicator 105-GT11-2428P-2	Applicator 105-GT11-2428P

● Outer terminal Caulking Jig (for 8-conductor cable)

Hand Press



Part Number GT11-8S/P-HP