

HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMERS



PH08XXNL Series (up to 160W)





- Power Rating: up to 160 W
- Height: 8.6mm to 9.1mm Max
- Footprint: 23.4mm x 21.6mm Max
- Frequency Range: 200kHz to 700kHz
- Isolation (Primary to Secondary): 1500 VDC

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C



Part ³ Number	Turns			Schematic	Primary ¹ Inductance (μ MIN)	Leakage ² Inductance (μ MAX)	DCR (mΩ MAX)			Maximum Height (mm)
	Primary A	Primary B	Secondary				Primary A	Primary B	Secondary	
PH0801NL	4T	4T	4T (1T:1T:1T)	A1	153	0.45	8.5	8.5	7	8.6
PH0802NL	4T	5T			194	0.45	8.5	12.5	7	8.6
PH0803NL	5T	5T			240	0.55	12.5	12.5	7	8.6
PH0804NL	5T	6T			290	0.60	12.5	14.2	7	9.1
PH0805NL	6T	6T			345	0.65	14.2	14.2	7	9.1
PH0806NL	4T	4T	1T & 1T	A2	153	0.45	8.5	8.5	.875 & .875	8.6
PH0807NL	4T	5T			194	0.55	8.5	12.5	.875 & .875	8.6
PH0808NL	5T	5T			240	0.55	12.5	12.5	.875 & .875	8.6
PH0809NL	5T	6T			290	0.90	12.5	14.2	.875 & .875	9.1
PH0810NL	6T	6T			345	1.00	14.2	14.2	.875 & .875	9.1
PH0811NL	4T	4T	2T & 1T	A3	153	0.45	8.5	8.5	1.75 & 1.75	8.6
PH0812NL	4T	5T			194	0.45	8.5	12.5	1.75 & 1.75	8.6
PH0813NL	5T	5T			240	0.55	12.5	12.5	1.75 & 1.75	9.1
PH0814NL	5T	6T			290	0.65	12.5	14.2	1.75 & 1.75	9.1
PH0815NL	6T	6T			345	0.85	14.2	14.2	1.75 & 1.75	9.1

Mechanicals

PH08XXNL

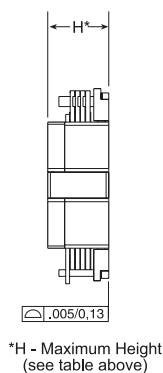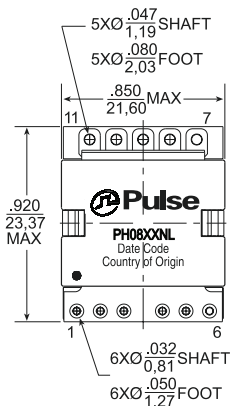


SUGGESTED PAD LAYOUT

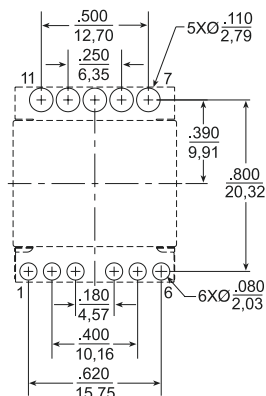

Weight11.0 grams
Tape & Reel180/reel
Tray40/tray

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0.25

Tape & Reel Layout for PH0801NL THRU PH0815NL

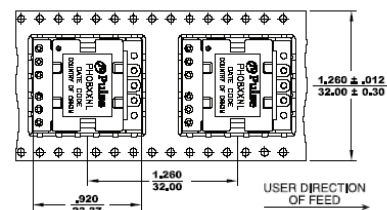

NOTE: The above is a universal footprint for a component that has all 11 pins populated. For a given part number, it is only necessary to provide pads for the terminations shown in the schematics on the next page.


HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMERS

PH08XXNL Series (up to 160W)


Schematics

PH08XXNL


A1 PH0801 / 02 / 03 / 04 / 05



A2 PH0806 / 07 / 08 / 09 / 10



A3 PH0811 / 12 / 13 / 14 / 15




Notes:

1. Inductance is measured with both primary windings connected in services (2 to 5, with 3 and 4 shorted).
2. Leakage inductance is measured on winding (2-5) with (3-4) and (7, 8, 9, 10, 11) shorted.
3. The "NL" suffix indicates an RoHS-compliant part number.
4. It is possible to add a primary side aux. winding to any of the above configurations as shown in the schematics. Transformers with primary side aux. winding are non-standard and can be made available upon request. The primary aux. winding can be between 2 and 16 turns. To add a primary aux. winding to a given base, use the

- extension .xxx. For example, to add a 4T aux. winding to the base part number PH0801NL, use the part number PH0801.004NL. The height increases by 0.5mm for .xxx part. For example, **PH0801NL** is 8.6mm MAX, **PH0801.004NL** is 9.1mm MAX.
5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the complete number (i.e. **PH0801.009NL** becomes **PH0801.009NLT**).
6. To determine if the transformer is suitable for your application, it is necessary to ensure that the temperature rise of the component (ambient plus temperature rise) not exceed its operating temperature. To determine the approximate temperature rise of the transformer, refer to the graphs below.

Core Loss vs Flux Density

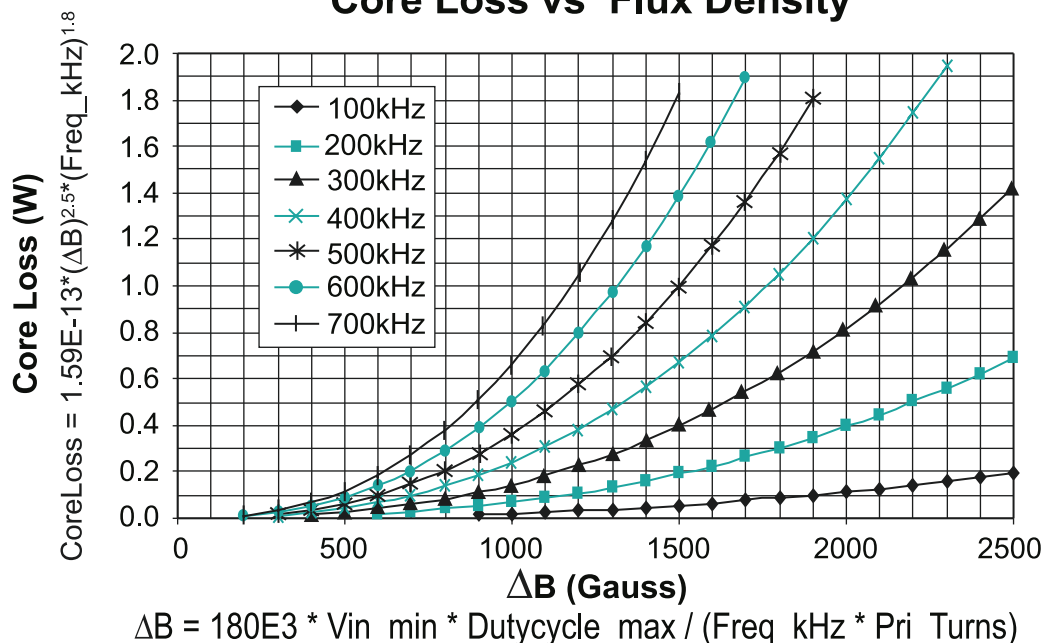


HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMERS

PH08XXNL Series (up to 160W)



Temperature Rise vs. Power (W) Dissipation

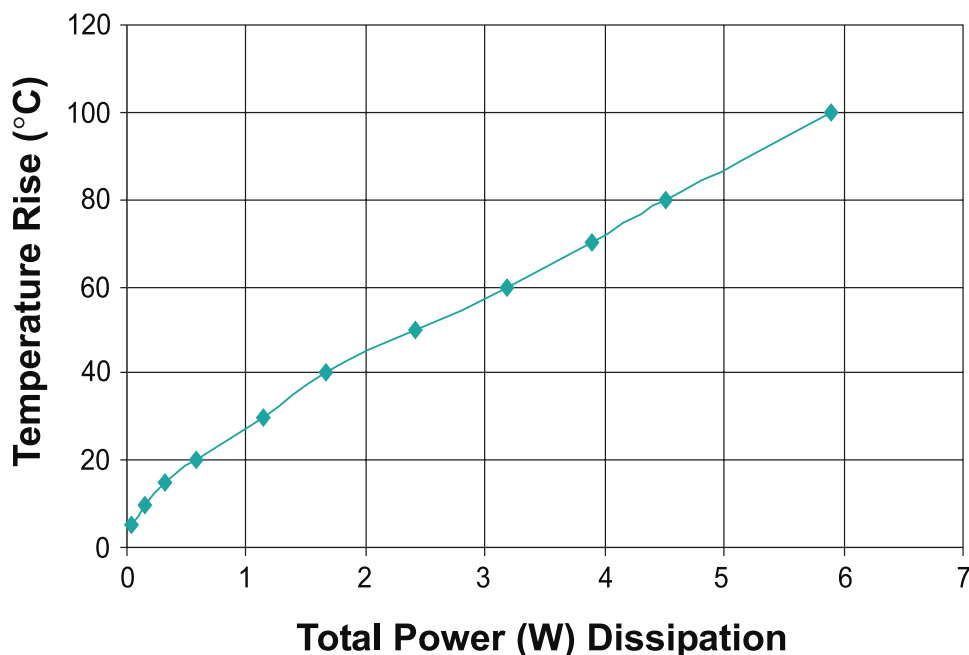

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen, P.R.
China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Tel: 65 6287 8998
Fax: 65 6280 0080

Pulse North Asia

1F, No.111
Xiyuan Road
Zhongli District
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.