

Features

LED DRIVER

- Buck-Boost LED Driver up to $V_{out}=40V$
- Constant Current Output (350 or 500mA)
- Digital PWM and Analogue Voltage Dimming
- High Efficiency to 92%
- EN60950-1 and UL60950-1 Certified
- EMC Class A Without Extern Components
- Pinned or Wired Version
- 5 Year Warranty

Description

The RBD-12 series is a Buck-Boost constant current source designed for driving high power LED applications. Two output currents are available, 350mA and 500mA, and the maximum output voltage is 40V. The drivers have digital and analogue voltage dimming control and a regulated reference 5V output. Typical applications are solar, off-grid lighting, mobile traffic signs and battery-powered lighting. The wired version is IP67 rated.

Selection Guide

Part Number	Input Range (VDC)	Output Current (mA)	Output Voltage (VDC)	Dimming Control	Efficiency typ. (%)
RBD-12-0.35*	8-36	0-350	2-40	Digital + Analogue	92
RBD-12-0.50*	8-36	0-500	2-40	Digital + Analogue	92

*add suffix "/W" for wired version with Vref output and analogue + PWM dimming control (seven wires)

Specifications (typical at 25°C, nominal input voltage, rated output current unless otherwise specified)

Operating Input Voltage Range		8-36VDC
Absolute Maximum Input Voltage		38VDC
Output LED String Voltage Range (depending on the input voltage, see Safe Operating Area)		2V min. / 40V max.
Input Filter		Capacitor
Max. Capacitance Load		100µF max.
Output Current Accuracy	(Note 1)	±5% typ.
Internal Power Dissipation	350mA (Vin=36V, Vout=40V)	1.63W typ.
	500mA (Vin=36V, Vout=40V)	2.33W typ.
Output Current Stability (Note 2)	Vin=24V, Vout=2-40V	±2% max.
Output Current Ripple and Noise (20MHz BW)	350mA (Vin=24V, Vout=40V)	35mA _{p-p} typ.
	500mA (Vin=24V, Vout=40V)	45mA _{p-p} typ.
Reflected Back Ripple Current (20MHz BW)	Vin=24V, Vout=6-40V	70mA _{p-p} max.
Switching Frequency		350kHz typ.
Efficiency at Full Load	Vin=24V	92% typ.
Vref	Nominal 5V	0.8mA max.
PWM DIMMING CONTROL & REMOTE ON/OFF CONTROL		
Input Voltage Range		0V min. / 5V typ. / 10V max.
Threshold Voltage	Device ON	2V min.
	Device OFF	0.1V max.
Frequency		1000Hz max.
ANALOGUE DIMMING CONTROL		
Input Voltage Range		0V min. / 10V max.
Control Voltage Range		0.2±0.1V min. / 1.5±0.1V max.
Operating Temperature	350mA	-40°C to +75°C
(see Derating Graph)	500mA	-40°C to +65°C
Case Temperature		115°C max.
Storage Temperature		-55°C to +125°C
Case Thermal Impedance		10°C/W
Soldering Temperature	Pinned Version	265°C/10sec. max.
Relative Humidity		95% RH max.
Short Circuit Protection	Continuous	Auto Recovery
Overtemperature Protection	(Auto Recovery)	125°C ± 5°C (MOSFET)
Case Material		Non Conductive Black Plastic

continued on next page

LIGHTLINE
DC/DC-Converter
with 5 year Warranty

RECOM

Constant Current Buck-Boost LED Driver




E224736

EN-60950-1 certified
UL-60950-1 certified

RBD-12

Derating-Graph (Ambient Temperature)

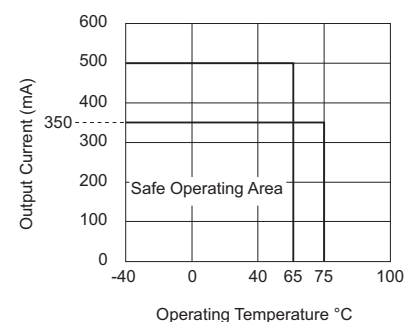

Refer to Application Notes

Specifications (typical at 25°C, nominal input voltage, rated output current unless otherwise specified)

Potting Material	Silicone Potting Material (UL94V-0)	
Case Dimensions	32.60 x 16.65 x 11.10 mm	
Package Weight	pinned version	13g
	wired version	17g
Packing Quantity	pinned version	29 pcs.
	wired version	12 pcs.
MTBF (using MIL-HDBK217F at 25°C)	1700 x 10 ³ hours	
Certification		
EN General Safety	Report: SPCLVD1111102	EN60950-1:2006 + A12:2011
IEC General Safety	Report: SPCLVD1111102	IEC60950-1:2005
UL General Safety	Report: E224736	UL60950-1, 2nd Edition

All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.

Note 1: Output Current Accuracy is defined as:

$$\left[\frac{I_{out} - I_{out \text{ "rated" }}}{I_{out \text{ "rated" }}} \right] \times 100$$


Note 2: Output Current Stability is defined as:

$$\left[\frac{I_{out \text{ "deviation" }} - I_{out \text{ "nominal" }}}{I_{out \text{ "nominal" }}} \right] \times 100$$

$$I_{out \text{ (deviation)}} = \text{maximum Deviation (min. Load, max. Load)}$$


Package Style and Pinning

RBD-12-x.xx - Through Hole Case

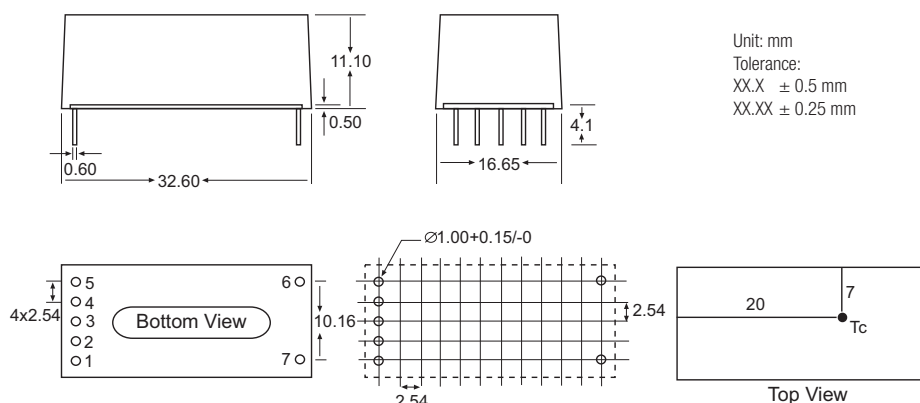

Pin#	Function	Comments
1	+Vin	DC Supply
2	Vref	Vref Voltage 5V typ.
3	Analogue Dimming	Leave open if not used
4	PWM/ON/OFF	Leave open if not used
5	GND	Do not connect to -Vout
6	-Vout	LED Cathode Connection
7	+Vout	LED Anode Connection

RBD-12-x.xx/W - Wired Version

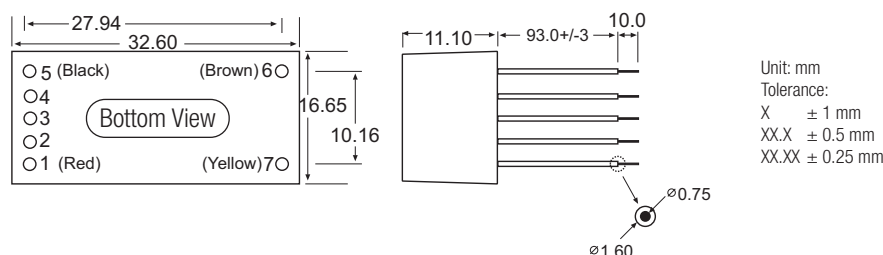


Wire Connections Pin#	Function	RBD-12-x.xx/W Wire color
1	+Vin	Red
2	Vref (5V typ.)	Yellow
3	Analogue Dimming	Green
4	PWM/ON/OFF	Blue
5	GND	Black
6	LED-	Brown
7	LED+	Yellow

Wires: UL/CSA approved (22AWG/300V)


Standard Applications

- EN55022 Class A without external filter
 EN55015 without filter
 EN55022 Class B with filter:

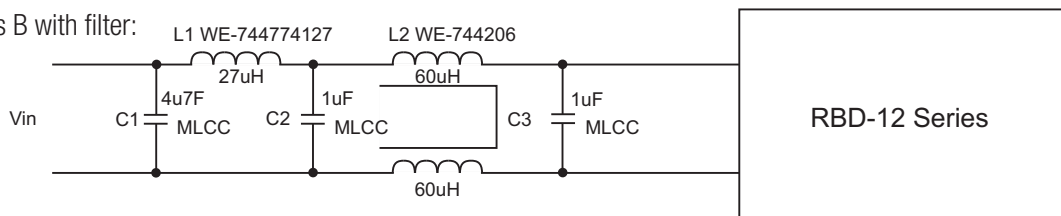


Standard Application



Single String Application

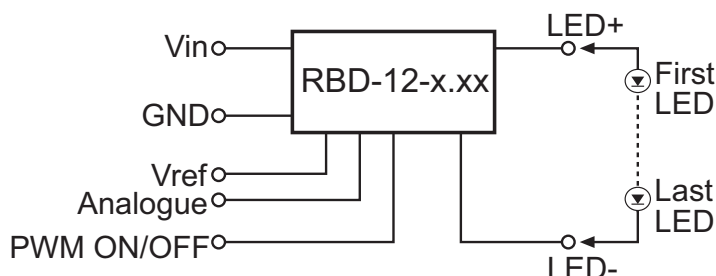

PWM Dimming Controlled

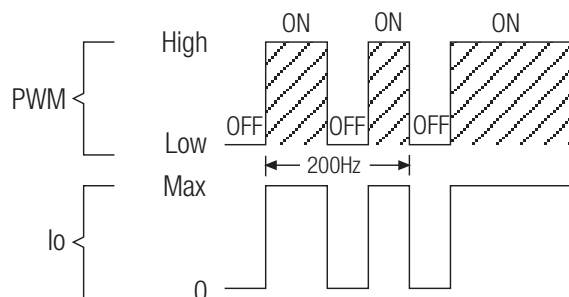


Solar Lighting Application

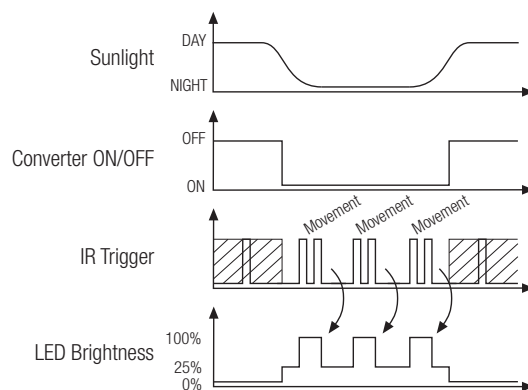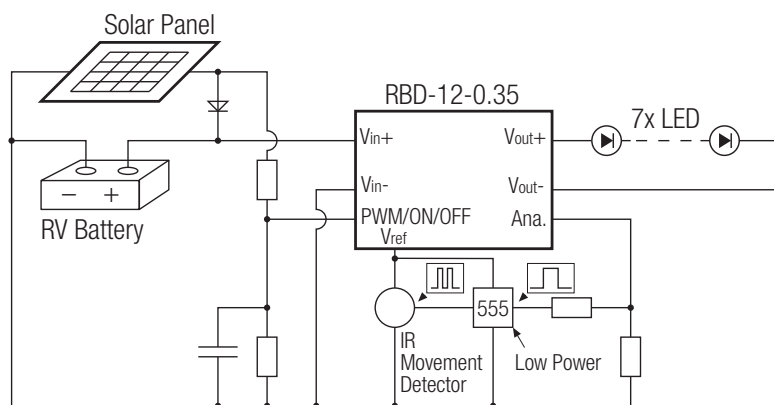


Safe Operating Area

500mA

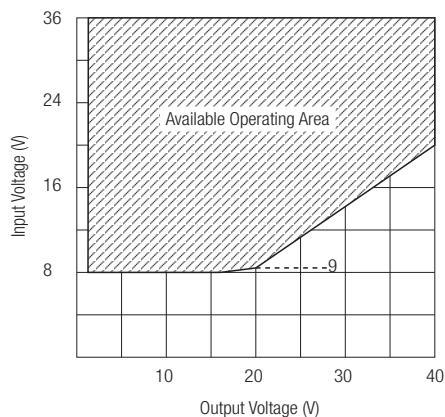


Vin 8V up to Vout = 17V
Vin 9V up to Vout = 20V
Vin 12V up to Vout = 24V
Vin 16V up to Vout = 32V

350mA

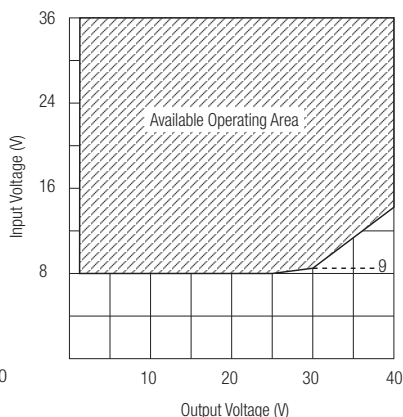

Vin 8V up to Vout = 25V
Vin 9V up to Vout = 27V
Vin 12V up to Vout = 36V

Dimming Controlled by Analog Voltage

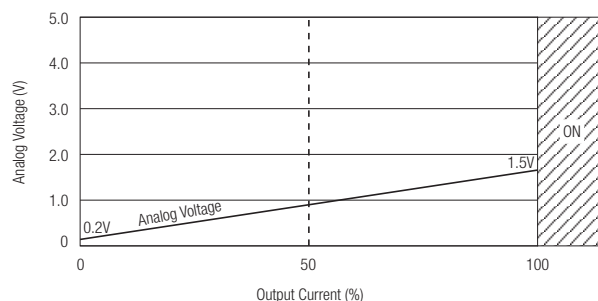

Note:

It is not possible to parallel the drivers to increase the current.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RBD-12-0.35](#) [RBD-12-0.35/W](#) [RBD-12-0.50](#) [RBD-12-0.50/W](#)