



DWG. SIZE	D	DWG. NO.	031-2980
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	25121	5/13/03	
REVISED DIAL PLATE			

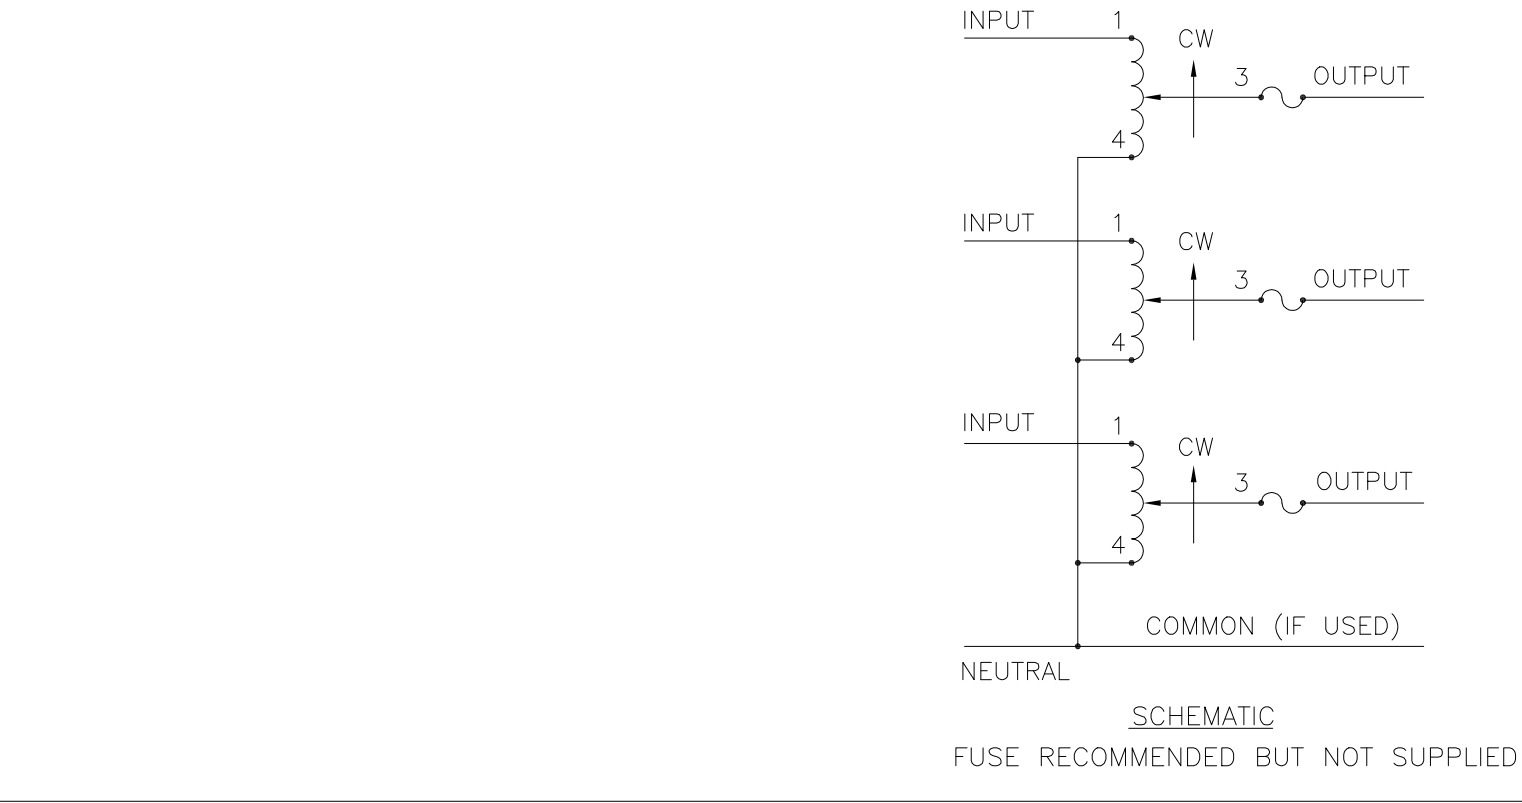

⌘ IF GANGED UNITS ARE USED IN A SYSTEM THAT ORDINARILY HAS A COMMON NEUTRAL OR GROUND BETWEEN SOURCE AND LOAD, THE NEUTRAL OR GROUND MUST BE CONNECTED TO THE COMMON TERMINALS OF THE VARIABLE TRANSFORMER ASSEMBLY. IF THE SYSTEM HAS NO NEUTRAL, THE LOAD MUST BE BALANCED OR THE TRANSFORMERS WILL BE DAMAGED.

■ JUMPER PROVIDED IN STANDARD COMMON POSITION AND SHOULD BE MOVED OR REMOVED AS REQUIRED.

++ LINE TO LINE VOLTAGE.

SPECIFICATIONS											
WIRING	INPUT		OUTPUT					SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD			FOR INCREASING VOLTAGE AS VIEWED FROM BASE END ■		
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA		INPUT	JUMPER	OUTPUT
THREE PHASE WYE π	240 ++	60	0-240	12	4.96	15	6.24	CW	1-1-1	4-4-4	3-3-3
								CCW	4-4-4	1-1-1	3-3-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±				TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: 1210B-3							
DECIMALS HOLES ANGLES DRAFT											
.XX .0005 .002 1° 1-1/2°											
MATERIAL:				UNITS IN [mm]		ALL DIMENSIONS APPLY AFTER PLATING		 A Components Corporation of Ameresco Company 301 Geddes Boulevard Dayton, Ohio 45403 USA			
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein and to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.											
DRAWN BY S.A. SMITH				DATE 9/24/97		FIRST USED ON		DO NOT SCALE DWG.		DWG. NO. 031-2980	
CHECKER				DATE		WEIGHT APPROX. 31 LBS		CASE CODE 83008			
ENGINEER				DATE		SCALE 1=1		SHEET 1 OF 1			
								DWG. SIZE D			



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Staco:

1210B-3