

Keyword:
iXtra - Long Term High Performance

Model: **SL-761**

Performance Data **Size 3/8AA**
(Typical values for batteries stored at 25°C for one year)

System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.5 Ah
Nominal current	1.3 mA
Max. continuous discharge current	75 mA
Pulse current capability	150 mA
Anode surface area	9 cm ²
Lithium content	0.5 g
Weight	12.5 g
Volume	5.7 cm ³
Temperature range	-55°C ... +85°C




WARNING:

Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100°C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25°C

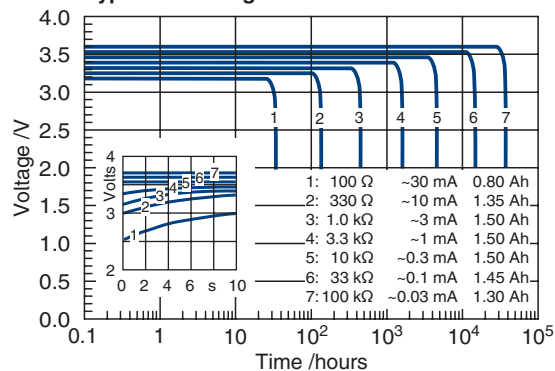


Available Capacity

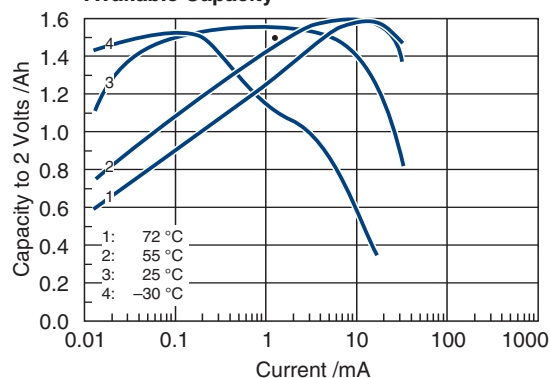


Operating Voltage

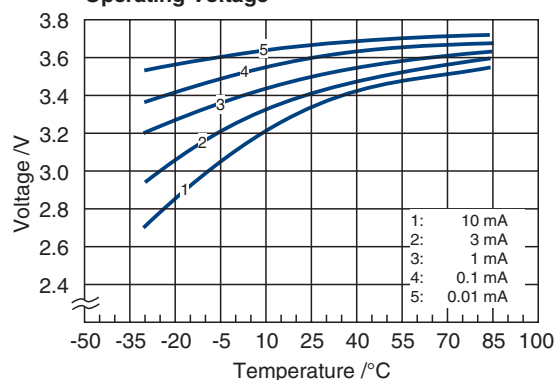


Voltage Response at +25 °C, pulse: 15 mA

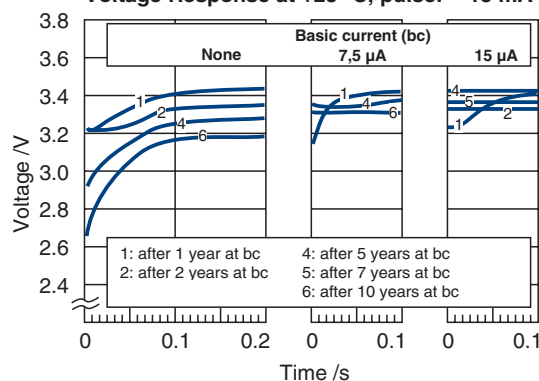


SL-761/S

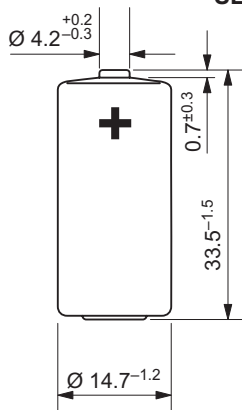


SL-761/T




SL-761/P

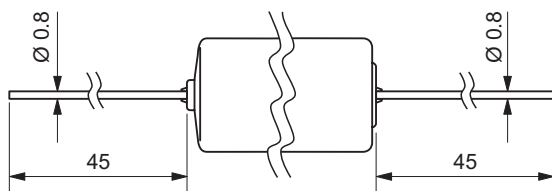

SL-761/PR



SL-761/PT



Available Terminations

SL-761/S	Standard
SL-761/T	Tags
SL-761/P	Pins
SL-761/PR	Pins Radial
SL-761/PT	Polarized Tags

Catalogue No.

11 1 07611 00
11 1 07612 00
11 1 07613 00
11 1 07616 00
11 1 07618 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.