


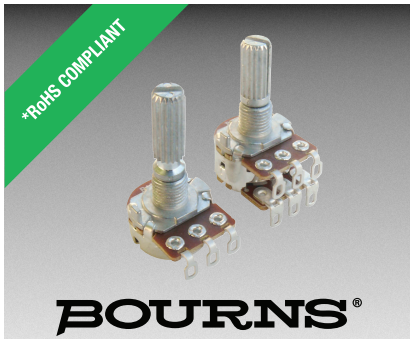

Features

- Single and dual section control
- Metal shaft styles
- Carbon element
- Center and multiple detent options
- Wide range of resistance tapers
- Plain or knurled shaft options
- Linear, audio and reverse audio taper options
- RoHS compliant*

PDB18 Series - 17 mm Rotary Potentiometer

Additional Information

Click these links for more information:



[PRODUCT
SELECTOR](#)



[TECHNICAL
LIBRARY](#)



[INVENTORY](#)



[SAMPLES](#)



[CONTACT](#)

Electrical Characteristics

Taper..... Linear, audio
Standard Resistance Range
..... 1 K ohms to 1 M ohms
Standard Resistance Tolerance
..... $R \leq 1K \Omega \pm 30\%$
..... $1K \Omega < R < 1M \Omega \pm 20\%$
..... $\geq 1M \Omega \pm 30\%$
Residual Resistance 1 % max.


Environmental Characteristics

Operating Temperature... -10 °C to +50 °C
Power Rating
Linear 0.2 watt
Dual Section 0.125 watt
Audio 0.1 watt
Dual Section 0.06 watt
Maximum Operating Voltage
Linear 200 V
Audio 150 V
Sliding Noise 47 mV max.

Mechanical Characteristics


Mechanical Angle 300 ° $\pm 5^\circ$
Rotational Torque 10 to 150 gf-cm
Detent Torque 150 to 500 g-cm
Stop Strength 5 kg-cm min.
Rotational Life 15,000 cycles
Soldering Condition
..... 260 °C max. within 3 seconds
Hardware One flat washer and
mounting nut supplied per
potentiometer with bushing

Derating Curve

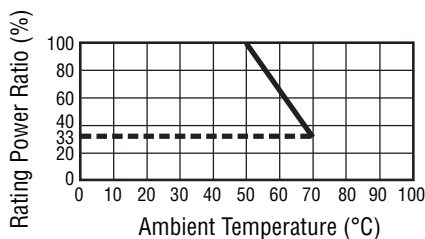


Product Dimensions

PDB181-K

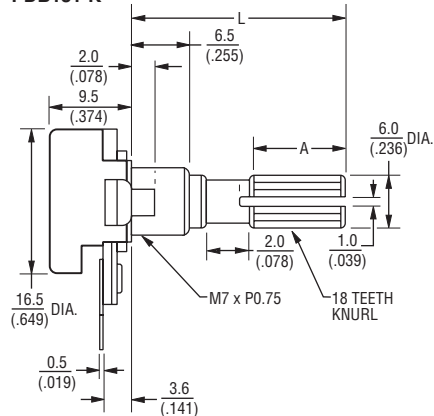


SHAFT SHOWN IN CCW POSITION

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$



PDB181-A

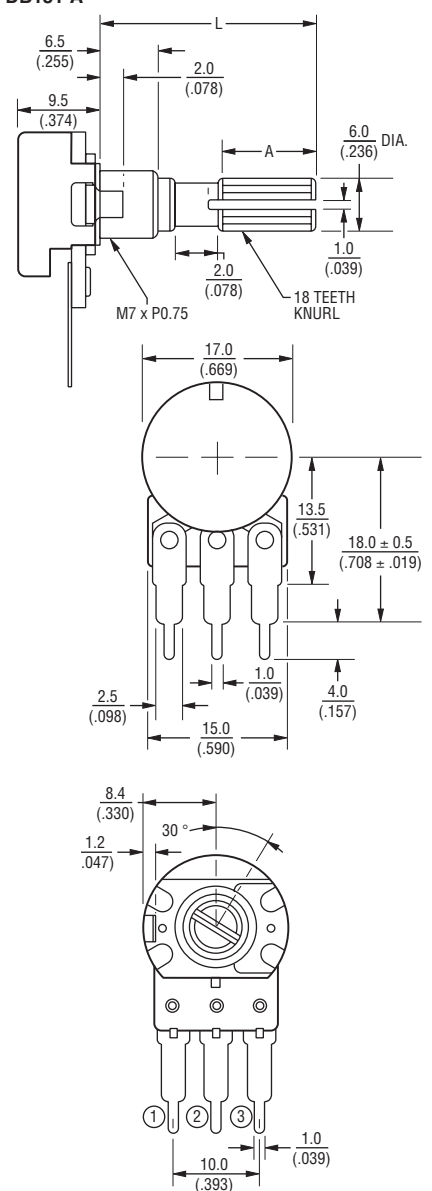

SHAFT SHOWN IN CCW POSITION



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Applications


- Audio/TV sets
- Car radio
- Amplifiers/mixers/drum machines/synthesizers
- PCs/monitors
- Appliances

PDB18 Series - 17 mm Rotary Potentiometer

BOURNS®


Product Dimensions

PDB181-B

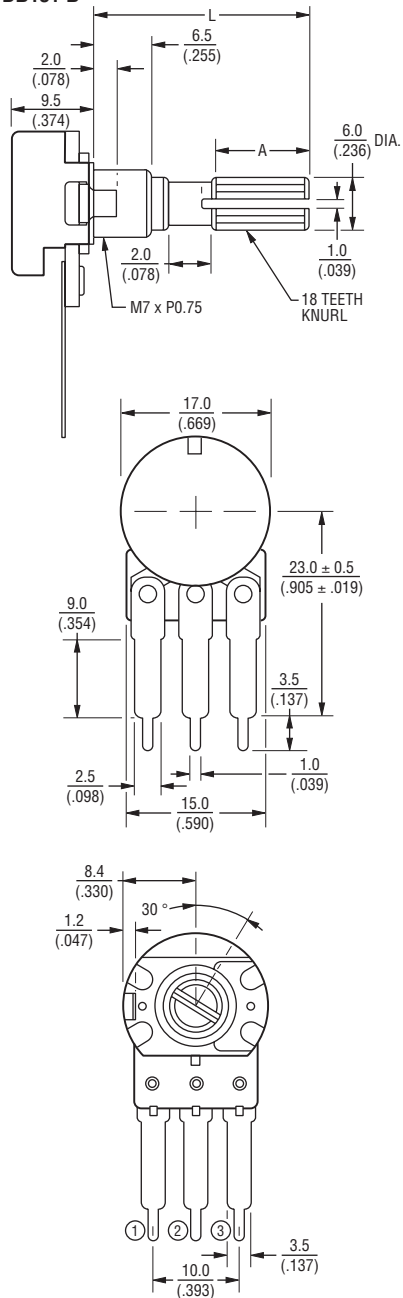

SHAFT SHOWN IN CCW POSITION


PDB181-E

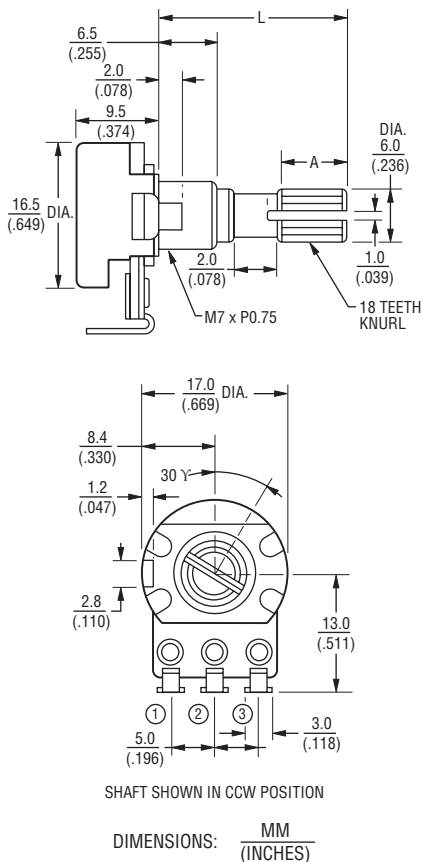

SHAFT SHOWN IN CCW POSITION

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

PDB181-D

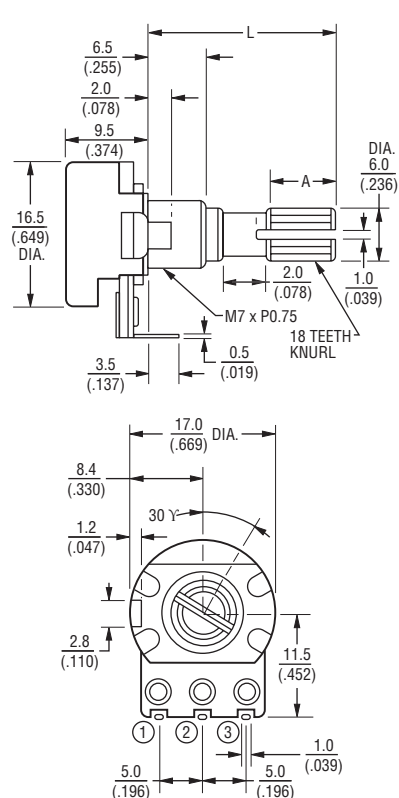

SHAFT SHOWN IN CCW POSITION

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PDB18 Series - 17 mm Rotary Potentiometer


BOURNS®

Product Dimensions



PDB181-P

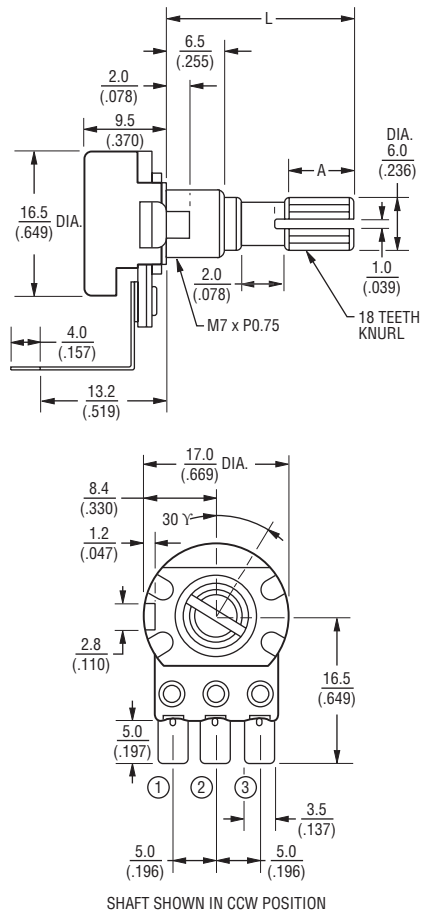

**PDB182-B
Dual Gang**

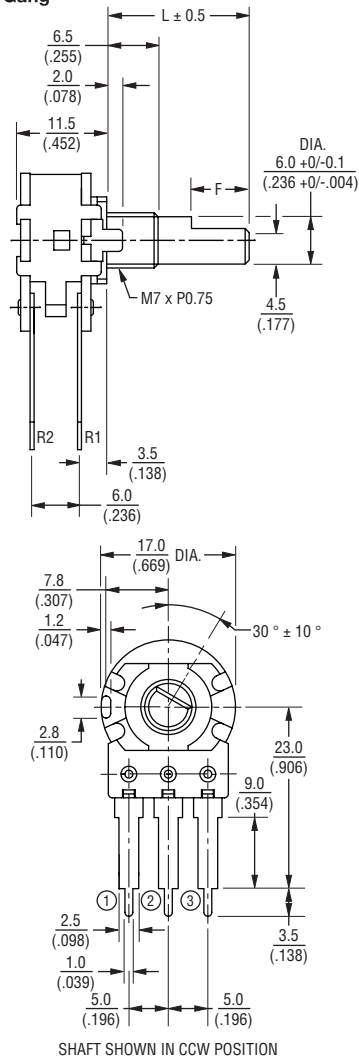

**PDB182-K
Dual Gang**

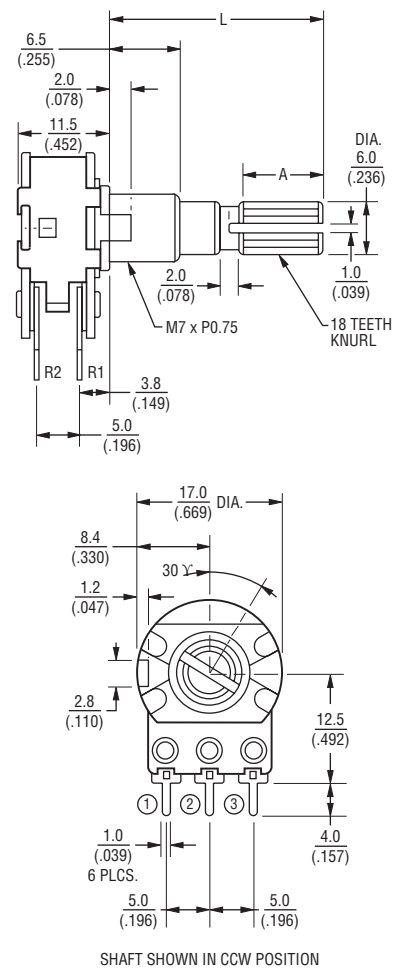

SCHEMATIC

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PDB18 Series - 17 mm Rotary Potentiometer

BOURNS®


Product Dimensions

PDB182-E
Dual Gang

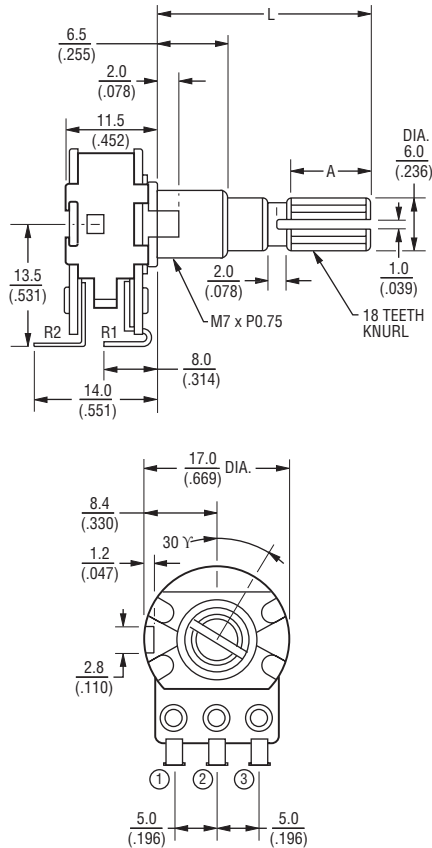

SHAFT SHOWN IN CCW POSITION

PDB182-D
Dual Gang

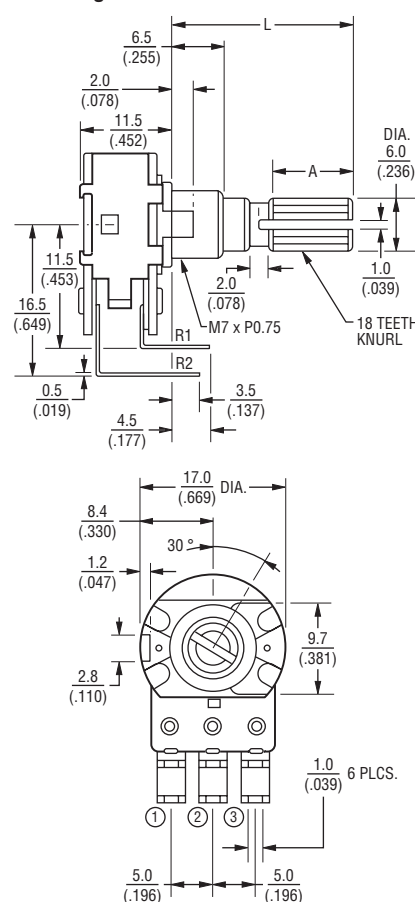


SHAFT SHOWN IN CCW POSITION

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Shaft Styles


K Type

L	15 (.591)	18 (.709)	20 (.787)
A	6.5 (.256)	9.5 (.374)	11.5 (.453)

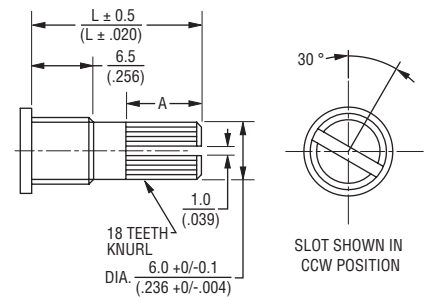

SLOT SHOWN IN CCW POSITION


L	25 (.984)	30 (1.181)
A	14 (.551)	19 (.748)

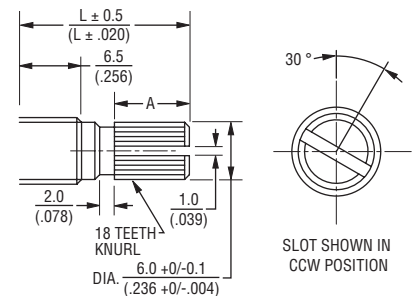

SLOT SHOWN IN CCW POSITION


P Type

L	20 (.787)	25 (.984)	30 (1.181)
---	--------------	--------------	---------------



F Type

L	15 (.591)	20 (.787)	25 (.984)	30 (1.181)	35 (1.378)
F	7 (.276)	12 (.472)	12 (.472)	12 (.472)	12 (.472)

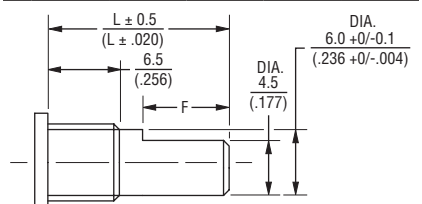

Specifications are subject to change without notice.




Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PDB18 Series - 17 mm Rotary Potentiometer

BOURNS®

Tapers

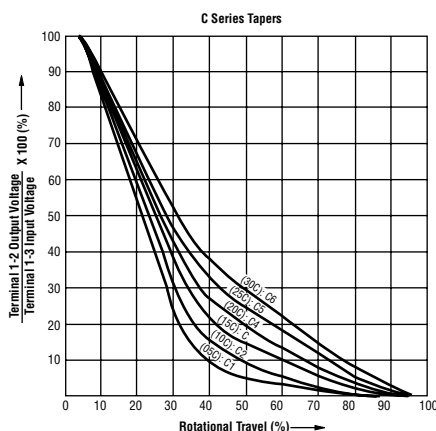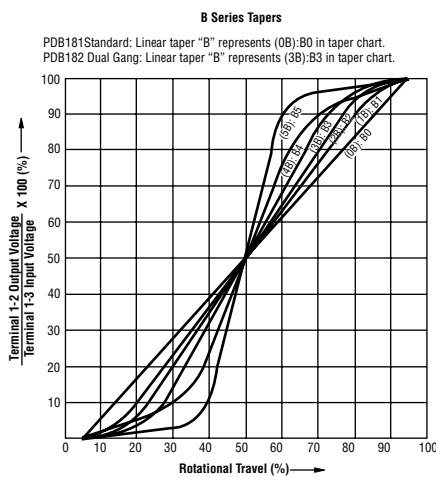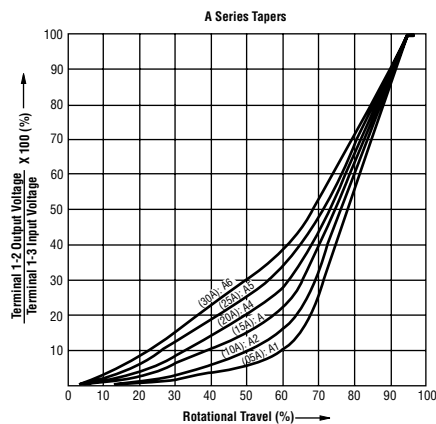

How To Order

PDB18 1 - K 4 25 K - 103 A1

Model

Number of Sections

- 1 = Single Section
- 2 = Dual Section

Terminal Configuration

(Pin Layout)

(see individual drawings)

- K = PC Pins vertical/
Down Facing
(12.5 mm)
- A = PC Pins vertical/
Down Facing
(18.0 mm)
- B = PC Pins vertical/
Down Facing
(23.0 mm)
- E = Solder Lugs
Rear Facing
- P = PC Pins
Rear Facing
- D = PC Pins
Front Facing

Detent Option

- 2 = Center Detent
- 4 = No Detents
- 5 = 10 Detent / 11 Position
- 6 = 20 Detent / 21 Position
- 7 = 30 Detent / 31 Position
- 8 = 40 Detent / 41 Position

Standard Shaft Length

- 15 = 15 mm
- 18 = 18 mm
- 20 = 20 mm
- 25 = 25 mm
- 30 = 30 mm

Shaft Style

- F = Metal Flatted Shaft
- K = Metal Knurled Type Shaft
18 Toothed Serration Type
- P = Metal Plain Shaft

Resistance Code (See Table)

Resistance Taper (See Taper Charts)
Taper Series followed by Curve Number

Other styles available.

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

REV. 07/25

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bourns:](#)

PDB182-K230K-104A	PDB182-K230K-104B	PDB181-E420F-503B	PDB181-E420K-102B	PDB181-E420K-103B
PDB181-E420K-104B	PDB181-E420K-105B	PDB181-E420K-502B	PDB181-E420K-504B	PDB181-K220K-102B
PDB181-K220K-103B	PDB181-K220K-104B	PDB181-K220K-502B	PDB181-K220K-503B	PDB181-K415K-102A
PDB181-K420K-102A	PDB181-K420K-102B	PDB181-K420K-103A	PDB181-K420K-103B	PDB181-K420K-104A
PDB181-K420K-105A	PDB181-K420K-105B	PDB181-K420K-202A	PDB181-K420K-203A	PDB181-K420K-203B
PDB181-K420K-204A	PDB181-K420K-204B	PDB181-K420K-502A	PDB181-K420K-502B	PDB181-K420K-503A
PDB181-K420K-504A	PDB181-K425K-104B	PDB182-K220K-102B	PDB182-K220K-103B	PDB182-K220K-104B
PDB182-K220K-502B	PDB182-K220K-503A	PDB182-K420K-203B	PDB182-K420K-504A	PDB182-K420K-504B
PDB181-A420K-103B	PDB181-A425K-203A	PDB181-A425K-203B	PDB181-K420K-104B	PDB182-B230K-104A
PDB182-D420K-503A	PDB182-E420K-103A	PDB182-K425K-103A	PDB182-K430K-104A	PDB182-K430K-503A
PDB182-K420K-103B	PDB181-K420K-204A2	PDB181-K420K-203A2	PDB182-K420K-103A	PDB181-E415K-204B
PDB181-E420P-103B	PDB181-E415K-102B	PDB181-K418K-104B	PDB182-K418F-105B	PDB181-E415P-104A2
PDB181-E415F-103A2	PDB181-E420K-503B	PDB181-K420K-502A2	PDB181-K420K-103C	PDB181-E420F-103B1
PDB181-E415F-105A2	PDB182-E425K-254A2	PDB181-K420P-105A2	PDB181-K420K-103A2	PDB181-K415K-103B
PDB181-E415P-105A2	PDB181-K420P-104B	PDB181-E415P-504A2	PDB181-K215P-503B	PDB181-E418F-105B
PDB181-P415F-504A1	PDB181-K420P-105C	PDB181-P425F-103B	PDB181-A425K-203A2	PDB181-E420K-204A2
PDB181-K415K-102A2	PDB181-E415P-203B	PDB181-K420K-504B	PDB181-E415F-503A2	PDB181-E415F-504A2
PDB181-A420K-104B	PDB181-K420K-105A2	PDB182-K415K-102B	PDB181-E415K-103A1	PDB181-E420K-203B
PDB181-A420K-503A2	PDB181-E415P-103A2	PDB181-K425K-103B	PDB182-K425K-503A	PDB181-K420F-103A2
PDB181-K420K-202A2	PDB181-E415F-203B	PDB181-E415F-104B	PDB181-E415P-503A2	PDB181-K420K-503A2