


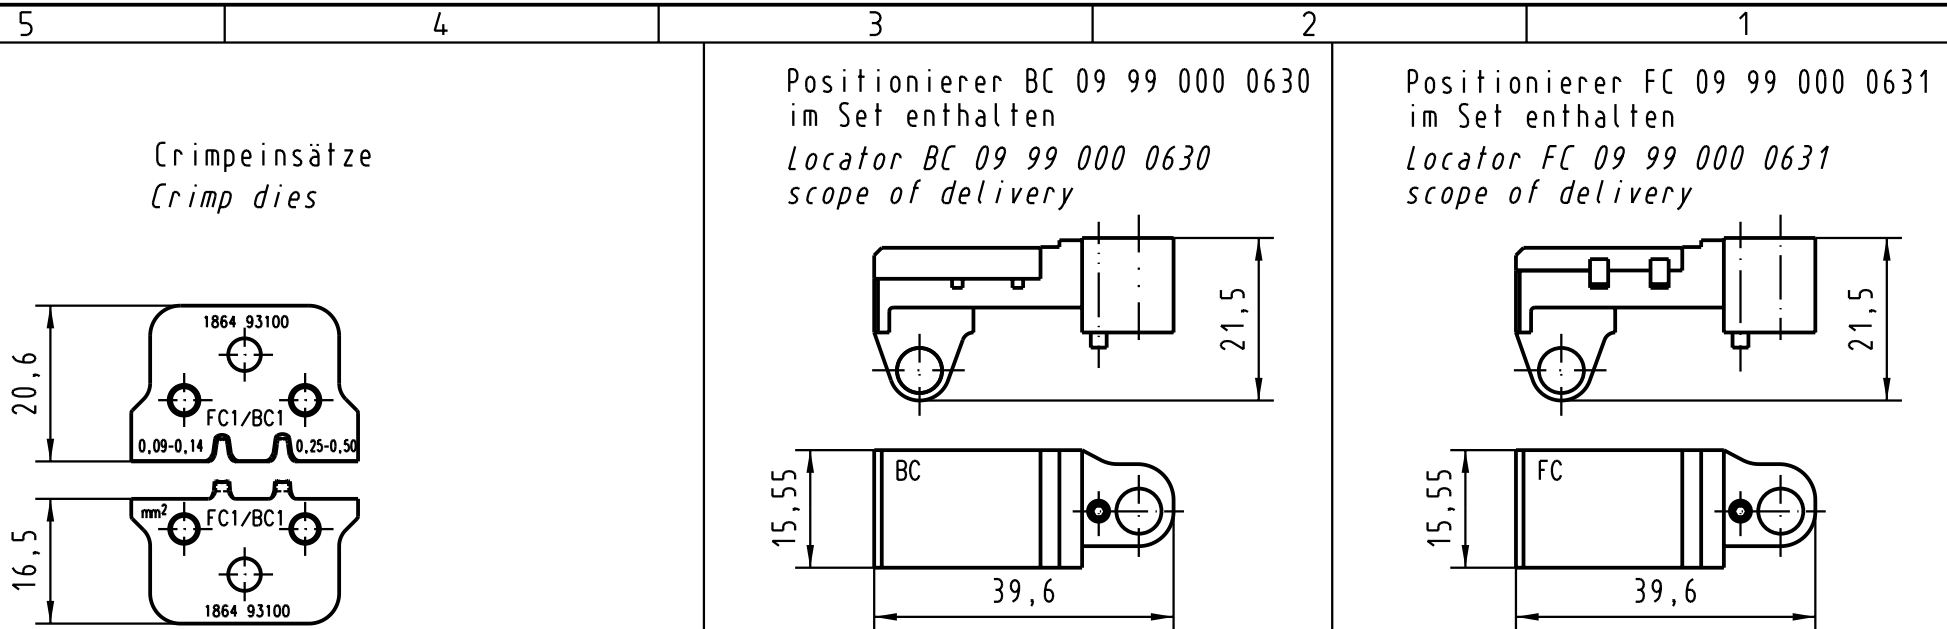

Anwendungsbereich: FC1/BC Kontakte
Application range: FC1/BC contacts

Leiterquerschnitt: Profil 1: 0,09-0,14 mm²
wire gauge : Profil 2: 0,25-0,50 mm²

für BC Crimpkontakte: / for BC crimp contacts:

09 02 000 8484	Feder / female	2	0,09-0,5	28-20	0,7-1,5
09 02 000 8474	Feder / female	1	0,09-0,5	28-20	0,7-1,5

für FC1 Crimpkontakte: / for FC1 crimp contacts:

09 06 000 9574	Messer / male	2	0,09-0,25	28-24	0,7-1,5
09 06 000 9554	Messer / male	1	0,09-0,25	28-24	0,7-1,5
09 06 000 8484	Feder / female	2	0,09-0,25	28-24	0,7-1,5
09 06 000 8474	Feder / female	1	0,09-0,25	28-24	0,7-1,5
09 06 000 6464	Feder / female	Sn	0,09-0,25	28-24	0,7-1,5

Kontakt Nr. contact no.	Messer / Feder male / female	AFS PL	Leiterquerschnitt wire gauge	AWG AWG	Isolationsø Insulationø
----------------------------	---------------------------------	-----------	---------------------------------	------------	----------------------------



All Dimensions in mm
Original Size DIN A 4

Techn. Character.

Nicht tolerierte Maßel Free size tolerances

			Dat.	Name	Maßstab/Scale
			Detail.	16.10.02	Hage.
			Insp.	16.10.02	Wae.
			Stand.		

1:1

Crimp-Set FC1/BC
für Zange 09 99 000 0620.00
for tool 09 99 000 0620.00

31239

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



TB 09 99 000 0621

Blatt/ page

Sub.