

Coaxial

Power Splitter/Combiner

ZB6PD-2

6 Way-0° 50Ω 800 to 2000 MHz



SMA version shown

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.875W max.

Coaxial Connections

SUMPORT	S
PORT 1,2,3,4,5,6	1,2,3,4,5,6

Features

- wideband, 800 to 2000 MHz
- excellent VSWR, 1.1:1 typ. output
- high isolation, 27dB typ.
- rugged, shielded case
- up to 10W power input as splitter

Applications

- cellular
- PCN
- instrumentation
- satellite distribution


CASE STYLE: Z259

Connectors	Model	Price	Qty.
SMA	ZB6PD-2-S	\$158.95	(1-9)
N-TYPE	ZB6PD-2-N	\$158.95	(1-9)

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 7.8 dB		AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.		S		OUT	
$f_c - f_u$					Max.	Typ.	Max.	Typ.	Max.
800-2000	27	17	0.7	1.7	0.7	1.2	1.6	1.13	1.3

Outline Drawing

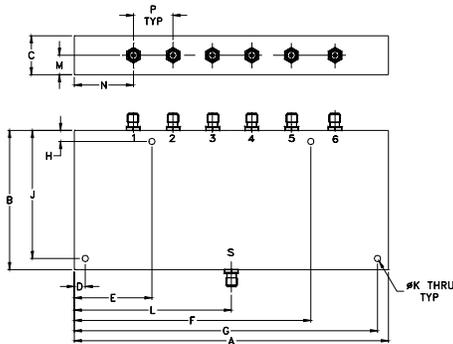




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
7.06	3.13	.88	.250	1.750	5.310	6.810	.250
179.32	79.50	22.35	6.35	44.45	134.87	172.97	6.35

J	K	L	M	N	P	wt
2.875	.144	3.53	.44	1.31	.89	grams
73.03	3.66	89.66	11.18	33.27	22.61	800

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		VSWR S	VSWR OUTPUTS
			Adjacent	Opposite		
			801.50	8.47		
887.00	8.49	0.31	32.26	24.98	1.12	1.19
986.50	8.54	0.33	27.48	26.44	1.21	1.18
1085.00	8.52	0.31	26.40	28.83	1.18	1.17
1179.50	8.53	0.31	25.53	31.14	1.03	1.11
1278.50	8.60	0.31	22.70	28.45	1.21	1.07
1377.50	8.61	0.30	22.46	26.13	1.31	1.12
1472.00	8.66	0.30	26.27	26.38	1.25	1.15
1571.00	8.69	0.27	38.21	32.21	1.19	1.15
1665.00	8.71	0.26	38.95	29.48	1.19	1.11
1764.50	8.77	0.33	31.36	27.36	1.21	1.06
1863.50	8.84	0.30	29.93	27.81	1.22	1.07
1913.00	8.89	0.32	28.17	27.62	1.23	1.07
1958.00	8.97	0.34	24.73	25.52	1.24	1.07
1998.50	9.01	0.35	21.70	23.15	1.25	1.07

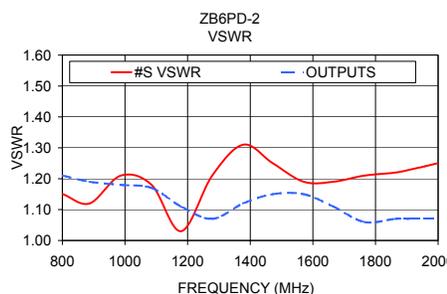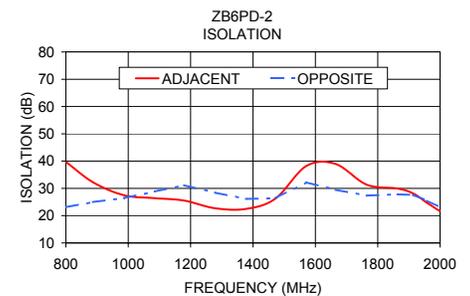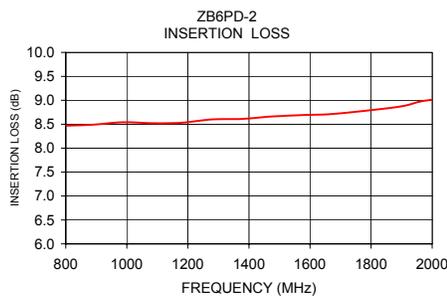

electrical schematic

