

CATALOG LISTING

426EN12-8

REPLACES

RELEASE NO. PR-23557

PAGE 1 OF 1

CHECK

14APR99

JAF

CHECK

14APR99

LJK

PTC/CAD 2D

DRAWN




MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929







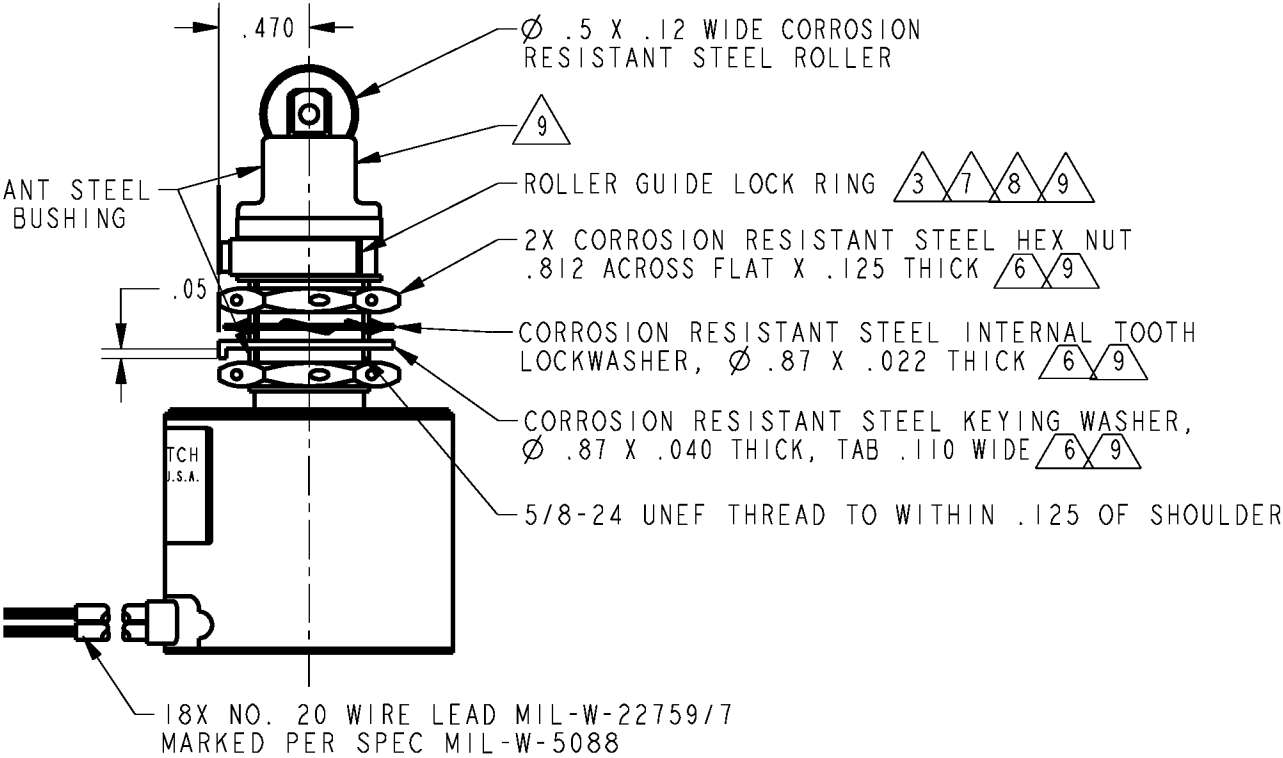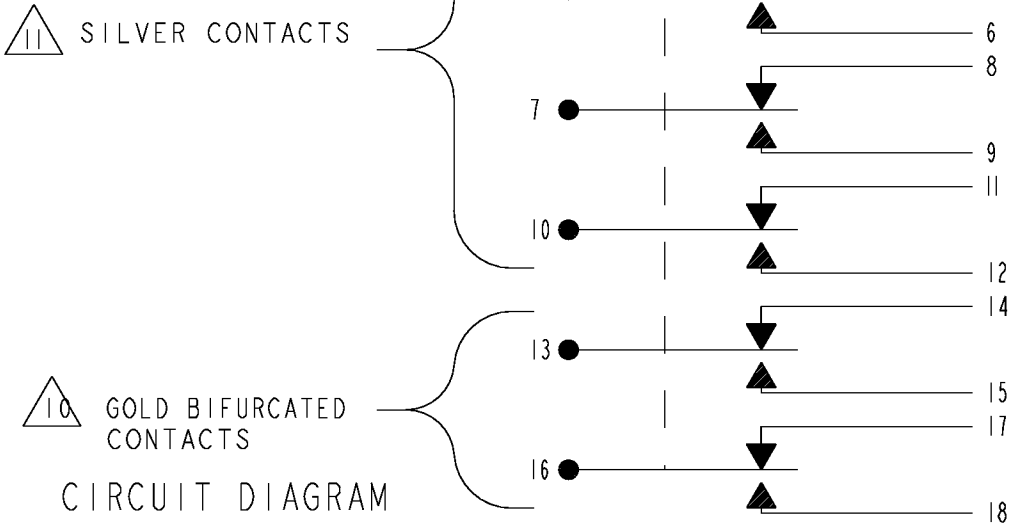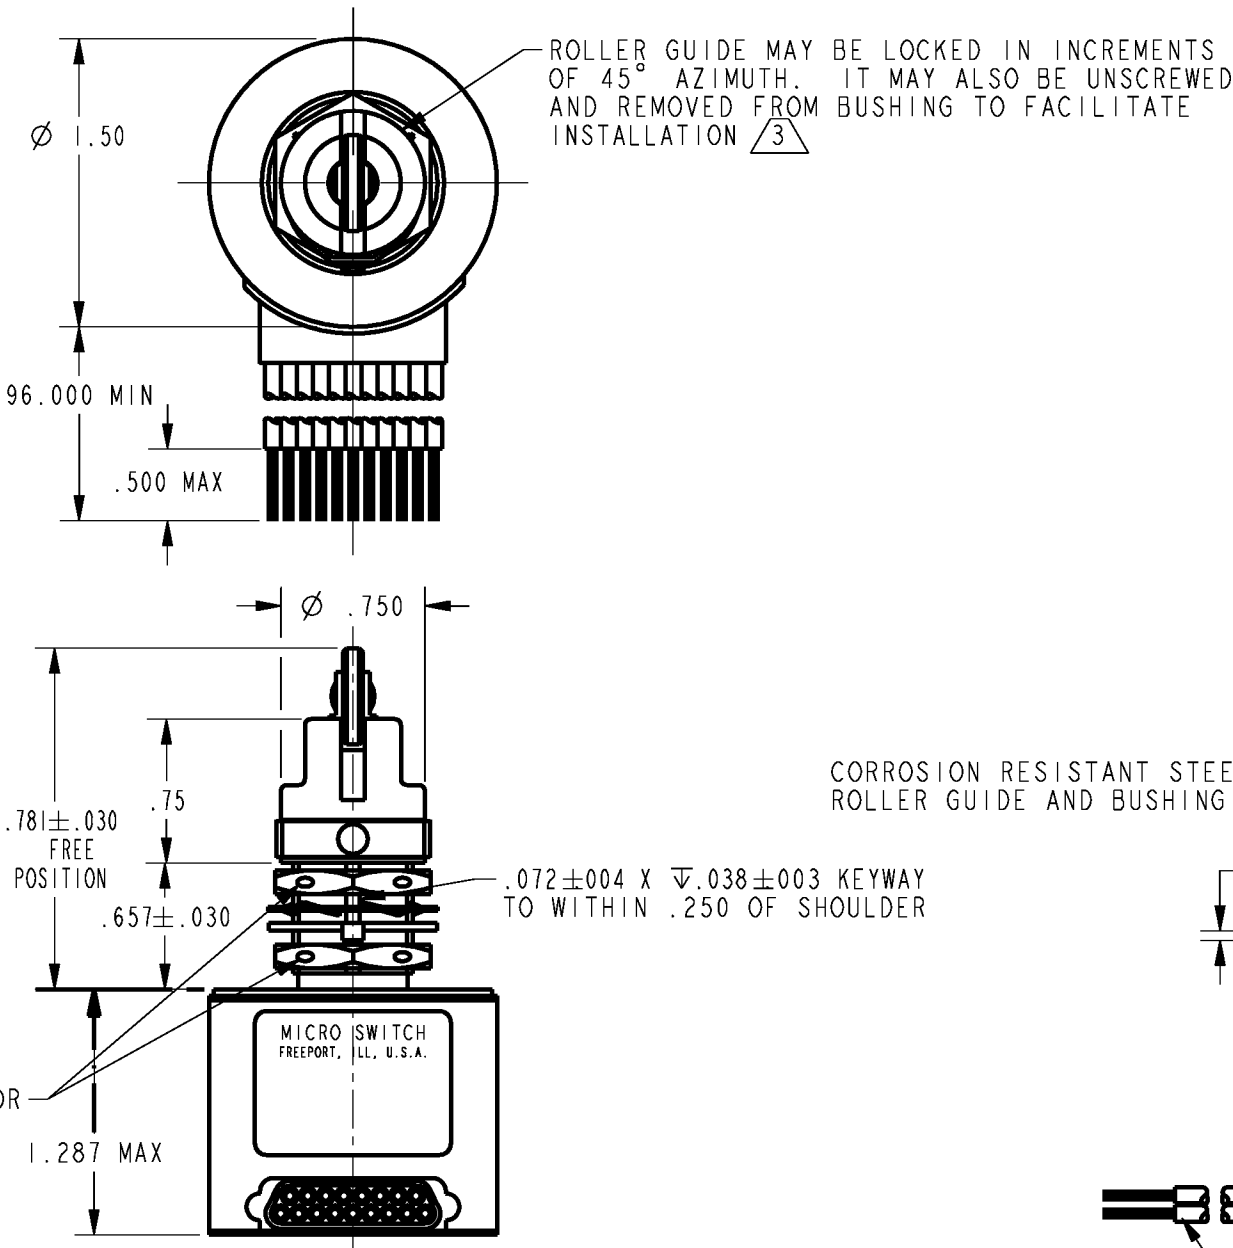

SWITCH - ENCLOSED

CATALOG LISTING


426EN12-8



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS				ELECTRICAL DATA				
OPERATING FORCE — — 6-12 LB				CONTACT ARRANGEMENT				
DIFFERENTIAL FORCE — — 30 LB MAX				6X S P D T				
RELEASE FORCE — — 4 LB MIN				LOAD	28 VDC			
PRETRAVEL — — — .040 MAX					SEA LEVEL		50,000 FT.	
DIFFERENTIAL TRAVEL — — .030 MAX								
OVERTRAVEL — — — .250 MIN				RES				
				IND	.5	4	.5	2.5
				MOTOR		4		

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	\pm .030
TWO PLACE	(.00)	\pm .015
THREE PLACE	(.000)	\pm .005
ANGLES		\pm

WEIGHT 32 OZ MAX

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- (3) TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING GUIDE LOCK RING
- 4 - COINCIDENCE OF OPERATION AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 5 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
- (6) REPLACEMENT MOUNTING HARDWARE: PACKET 19PA8
- (7) REPLACEMENT ROLLER GUIDE AND LOCKRING PACKET 15PA104
- (8) REPLACEMENT LOCKRING: PACKET 15PA137
- (9) HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
- (10) RATING APPLIES TO CIRCUITS 13-18
- (11) RATING APPLIES TO CIRCUITS 1-12

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[426EN12-8](#)