


## 10-W, 36-V to 75-V INPUT, 1500-V ISOLATION, DC/DC CONVERTERS

### FEATURES

- Input Voltage: 36 V to 75 V
- 10-W Total Output Power
- Output Voltages: 3.3 V, 5 V, and 12 V
- Output Voltage Trim  $\pm 10\%$
- Up To 87% Efficiency
- Overcurrent Protection
- Input Undervoltage Lockout
- Output Overvoltage Protection
- Positive or Negative Logic Enable Control Option
- Synchronization Option
- Space-Saving, Industry Standard Footprint (1.1 in x 1.0 in) / (27.94 mm x 24.38 mm)
- Industry Standard Pinout
- Surface Mount Package
- 1500-Vdc Isolation
- Agency Approvals:  
UL/IEC/CSA-C22.2 60950-1

### APPLICATIONS

- Intermediate Bus Architectures
- Telecom, High-End Computing Platforms
- Power Over Ethernet Applications
- Multi-Rail Power Systems

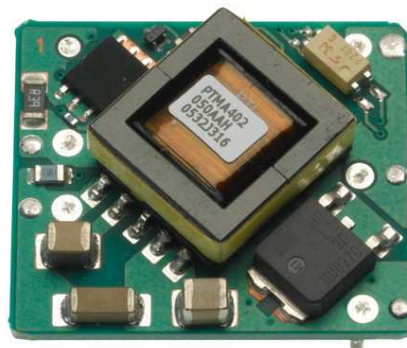


### DESCRIPTION

The PTMA40XX is a series of 10-W rated isolated dc/dc converters, designed to operate from a standard -48-V telecom central office supply. Housed in an industry standard 1.1 in x 1.0 in (27.94 mm x 24.38 mm) package, this series of isolated modules is set to one of the common intermediate bus voltages of 3.3 V, 5 V, or 12 V.

The PTMA40XX series includes many features expected of high-performance dc/dc converter modules. Operational features include an input undervoltage lockout (UVLO) and a dual-logic output enable control or synchronization option. Overcurrent protection ensures survival against load faults.

Typical applications include distributed power architectures in both telecom and computing environments, power over ethernet, and particularly complex digital systems requiring multiple power supply rails.

### TYPICAL APPLICATION

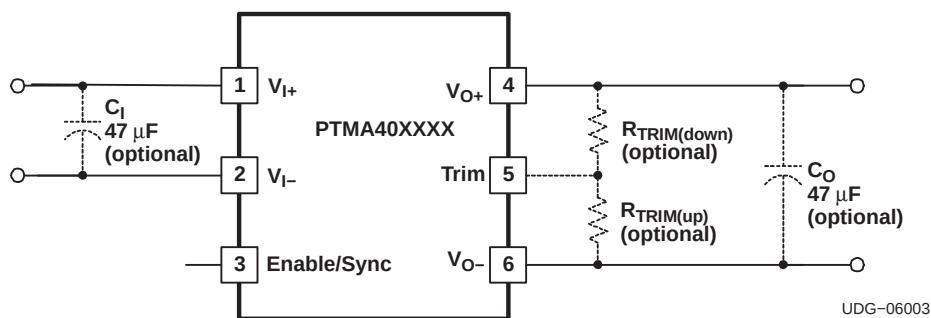

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## ORDERING INFORMATION

For the most current package and ordering information, see the Package Option Addendum at the end of this datasheet, or see the TI website at [www.ti.com](http://www.ti.com).

## PART NUMBERING SCHEME

|      | Input Voltage | Output Current                   | Output Voltage                             | Enable                                   | Electrical Options                                                 |   | Pin Style                                                                             | Shipping Package                  |
|------|---------------|----------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------------------------------|---|---------------------------------------------------------------------------------------|-----------------------------------|
| PTMA | 4             | 02                               | 050                                        | P                                        | 2                                                                  | A | D                                                                                     | T                                 |
|      | 4 = 48 V      | 01 = 1 A<br>02 = 2 A<br>03 = 3 A | 033 = 3.3 V<br>050 = 5.0 V<br>120 = 12.0 V | A = None<br>N = Negative<br>P = Positive | 1 = None<br>2 = $V_O$ Adjust<br>3 = $V_O$ Adjust & Synchronization |   | D = Through-hole, Pb-free<br>S = SMD, SnPb solder ball<br>Z = SMD, SnAgCu solder ball | Blank = Tray<br>T = Tape and Reel |

## ABSOLUTE MAXIMUM RATINGS

|              |                             |                                                    | UNIT                              |
|--------------|-----------------------------|----------------------------------------------------|-----------------------------------|
| $V_I$        | Input Voltage               | Continuous                                         | 75 V                              |
|              |                             | Surge, 1 s max                                     | 100 V <sup>(1)</sup>              |
| $T_A$        | Operating temperature range | Over $V_I$ range                                   | –40°C to 85°C                     |
| $T_{WAVE}$   | Wave solder temperature     | Surface temperature of module or pins (20 seconds) | AD suffix<br>260°C <sup>(2)</sup> |
| $T_{REFLOW}$ | Solder reflow temperature   | Surface temperature of module or pins (20 seconds) | AS suffix<br>235°C <sup>(2)</sup> |
|              |                             |                                                    | AZ suffix<br>260°C <sup>(2)</sup> |
| $T_{STG}$    | Storage temperature         |                                                    | –55°C to 125°C                    |
| $P_O$        | Output Power                |                                                    | 10 W                              |

(1) The converter's internal protection circuitry may cause the output to turn off when the applied input voltage is greater than 75 V.

(2) During solder reflow of SMD package version, do not elevate the module PCB, pins, or internal component temperatures beyond this peak temperature.

## PACKAGE SPECIFICATIONS

|                      |                                                                       |                                 | UNITS                  |
|----------------------|-----------------------------------------------------------------------|---------------------------------|------------------------|
| Weight               |                                                                       |                                 | 6.5 grams              |
| Flammability         | Meets UL94V-O                                                         |                                 |                        |
| Mechanical shock     | Per Mil-STD-883D, Method 2002.3, 1 ms, 1/2 Sine, mounted              | Horizontal T/H (Suffix AD)      | 500 G <sup>(1)</sup>   |
|                      |                                                                       | Horizontal SMD (Suffix AS & AZ) | 500 G <sup>(1)</sup>   |
| Mechanical vibration | Mil-STD-883D, Method 2007.2, 20-2000 Hz, PCB mounted                  | Horizontal T/H (Suffix AD)      | 20 G <sup>(1)</sup>    |
|                      |                                                                       | Horizontal SMD (Suffix AS & AZ) | 10 G <sup>(1)</sup>    |
| Reliability          | Telcordia SR-332 50% stress, $T_A = 40^\circ\text{C}$ , ground benign | MTBF                            | 7.3 10 <sup>6</sup> Hr |

(1) Qualification limit.

## PTMA403033 ELECTRICAL CHARACTERISTICS

 $T_A = 25^\circ\text{C}$ ,  $V_I = 48\text{ V}$ ,  $V_O = 3.3\text{ V}$ ,  $C_I = 0\text{ }\mu\text{F}$ ,  $C_O = 0\text{ }\mu\text{F}$ , and  $I_O = I_{O\text{max}}$  (Unless otherwise stated)

| PARAMETER                   |                                | TEST CONDITIONS                                                                    | PTMA403033                      |                        |                    | UNIT                |
|-----------------------------|--------------------------------|------------------------------------------------------------------------------------|---------------------------------|------------------------|--------------------|---------------------|
|                             |                                |                                                                                    | MIN                             | TYP                    | MAX                |                     |
| $P_O$                       | Output power                   | Over $V_I$ range                                                                   |                                 |                        | 10                 | W                   |
| $I_O$                       | Output current                 | Over $V_I$ range                                                                   | 0.1 <sup>(1)</sup>              |                        | 3 <sup>(2)</sup>   | A                   |
| $I_{\text{LIM}}$            | Current Limit Threshold        | Shutdown, followed by autorecovery                                                 |                                 | 4.25                   |                    | A                   |
| $V_I$                       | Input voltage range            | Over $I_O$ range                                                                   | 36                              | 48                     | 75                 | V                   |
| $V_O$                       | Set-point voltage tolerance    |                                                                                    |                                 | $\pm 2$ <sup>(3)</sup> |                    | % $V_O$             |
|                             | Temperature variation          | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$                                 |                                 | $\pm 1$                |                    | % $V_O$             |
|                             | Line regulation                | Over $V_I$ range                                                                   |                                 | $\pm 3$                |                    | mV                  |
|                             | Load regulation                | Over $I_O$ range                                                                   |                                 | $\pm 10$               |                    | mV                  |
|                             | Total output voltage variation | Includes set-point, line, load, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ |                                 | 3                      | 5 <sup>(3)</sup>   | % $V_O$             |
|                             | Trim adjust range              | Over $V_I$ range                                                                   | 3.0                             |                        | 3.6                | V                   |
| $\eta$                      | Efficiency                     | $P_O = P_{O\text{max}}$                                                            |                                 | 82%                    |                    |                     |
|                             | $V_O$ Ripple (peak-to-peak)    | 20-MHz bandwidth                                                                   |                                 | 65                     |                    | mV <sub>pp</sub>    |
| Transient response          |                                | 0.1 A/ $\mu\text{s}$ load step, 50% to 100% $I_{O\text{max}}$                      |                                 | Recovery time          | 750                | $\mu\text{s}$       |
|                             |                                |                                                                                    |                                 | $V_O$ over/undershoot  | $\pm 150$          | mV                  |
| Output enable input (pin 3) |                                | Referenced to $V_I^-$                                                              | Input high voltage ( $V_{IH}$ ) |                        | 4.5                | Open <sup>(4)</sup> |
|                             |                                |                                                                                    | Input low voltage ( $V_{IL}$ )  |                        | –0.2               | 0.8                 |
|                             |                                |                                                                                    | Input low current ( $I_{IL}$ )  |                        | 1                  | mA                  |
|                             | Standby input current          | Pin 3 open                                                                         |                                 | 8                      |                    | mA                  |
| UVLO                        | Undervoltage lockout           |                                                                                    | 32                              |                        | 34                 | V                   |
| OVP                         | Output Overvoltage Protection  |                                                                                    | 3.7                             |                        | 5.4                | V                   |
| $f_S$                       | Switching frequency            | Over $V_I$ and $I_O$ ranges (non-Sync option)                                      | 250                             | 300                    | 350                | kHz                 |
| SYNC                        | Sync switching frequency       | Free-running                                                                       | 180                             | 215 <sup>(5)</sup>     | 250                | kHz                 |
|                             |                                | Synchronization range                                                              | 250 <sup>(5)</sup>              |                        | 350 <sup>(5)</sup> |                     |
|                             | high-level input voltage       |                                                                                    | 3.5                             |                        | 6                  | V                   |
|                             | low-level input voltage        |                                                                                    | –0.3                            |                        | 0.5                | V                   |
|                             | clock duty cycle               |                                                                                    | 25                              |                        | 75                 | %                   |
| $C_I$                       | External input capacitance     |                                                                                    | 0                               | 47                     |                    | $\mu\text{F}$       |
| $C_O$                       | External output capacitance    |                                                                                    | 0                               | 47 <sup>(6)</sup>      | 1000               | $\mu\text{F}$       |
| $V_{\text{ISO}}$            | Isolation voltage              | Primary-Secondary                                                                  | 1,500                           |                        |                    | Vdc                 |
| $C_{\text{ISO}}$            | Isolation capacitance          |                                                                                    | 1,100                           |                        |                    | pF                  |
| $R_{\text{ISO}}$            | Isolation resistance           |                                                                                    | 10                              |                        |                    | M $\Omega$          |

- (1) The converter requires a minimum load current for proper operation. However, the converter is not damaged when operated under a no-load condition.
- (2) See temperature derating curves for safe operating area (SOA), to determine output current derating at elevated ambient temperatures.
- (3) The set-point voltage tolerance is affected by the tolerance and stability of  $R_{\text{TRIM}}$ . The stated limit is unconditionally met if  $R_{\text{TRIM}}$  has a tolerance of  $\leq 1\%$ , with  $\leq 100\text{ ppm}/^\circ\text{C}$  temperature stability.
- (4) The Enable input (pin 3) has an internal pullup resistor. Do not place an external pullup resistor on this input pin. If the enable feature is not used, for a positive enable device this input should be left open circuit and a negative enable device should be permanently connected to  $V_I^-$  (pin 2). A discrete MOSFET or bipolar transistor is recommended for the enable control. The open-circuit voltage is typically less than 5 V. See the *Application Information* for a more detailed description.
- (5) A device with the synchronization option has a reduced switching frequency of 215 kHz typical. The synchronization frequency can only be adjusted to a higher frequency, up to 350 kHz maximum.
- (6) An output capacitor is not required for proper operation. However, additional capacitance at the load improves the transient response.

**PTMA402050 ELECTRICAL CHARACTERISTICS**
 $T_A = 25^\circ\text{C}$ ,  $V_I = 48\text{ V}$ ,  $V_O = 5\text{ V}$ ,  $C_I = 0\text{ }\mu\text{F}$ ,  $C_O = 0\text{ }\mu\text{F}$ , and  $I_O = I_{O\text{max}}$  (Unless otherwise stated)

| PARAMETER |                                | TEST CONDITIONS                                                                    | PTMA402050                      |                        |                     | UNIT             |
|-----------|--------------------------------|------------------------------------------------------------------------------------|---------------------------------|------------------------|---------------------|------------------|
|           |                                |                                                                                    | MIN                             | TYP                    | MAX                 |                  |
| $P_O$     | Output power                   | Over $V_I$ range                                                                   |                                 |                        | 10                  | W                |
| $I_O$     | Output current                 | Over $V_I$ range                                                                   | 0.1 <sup>(1)</sup>              |                        | 2 <sup>(2)</sup>    | A                |
| $I_{LIM}$ | Current Limit Threshold        | Shutdown, followed by autorecovery                                                 |                                 | 3                      |                     | A                |
| $V_I$     | Input voltage range            | Over $I_O$ range                                                                   | 36                              | 48                     | 75                  | V                |
| $V_O$     | Set-point voltage tolerance    |                                                                                    |                                 | $\pm 2$ <sup>(3)</sup> |                     | % $V_O$          |
|           | Temperature variation          | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$                                 |                                 | $\pm 1$                |                     | % $V_O$          |
|           | Line regulation                | Over $V_I$ range                                                                   |                                 | 5                      |                     | mV               |
|           | Load regulation                | Over $I_O$ range                                                                   |                                 | 10                     |                     | mV               |
|           | Total output voltage variation | Includes set-point, line, load, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ |                                 | 3                      | 5 <sup>(3)</sup>    | % $V_O$          |
|           | Trim adjust range              | Over $V_I$ range                                                                   | 4.5                             |                        | 5.5                 | V                |
| $\eta$    | Efficiency                     | $P_O = P_{O\text{max}}$                                                            |                                 | 85%                    |                     |                  |
|           | $V_O$ Ripple (peak-to-peak)    | 20-MHz bandwidth                                                                   |                                 | 55                     |                     | mV <sub>pp</sub> |
|           | Transient response             | 0.1 A/ $\mu\text{s}$ load step, 50% to 100% $I_{O\text{max}}$                      |                                 | Recovery time          | 250                 | $\mu\text{s}$    |
|           |                                |                                                                                    |                                 | $V_O$ over/undershoot  | $\pm 150$           | mV               |
|           | Output enable input (pin 3)    | Referenced to $V_I^-$                                                              | Input high voltage ( $V_{IH}$ ) | 4.5                    | Open <sup>(4)</sup> | V                |
|           |                                |                                                                                    | Input low voltage ( $V_{IL}$ )  | -0.2                   | 0.8                 |                  |
|           |                                |                                                                                    | Input low current ( $I_{IL}$ )  | 1                      |                     | mA               |
|           | Standby input current          | Pin 3 open                                                                         |                                 | 8                      |                     | mA               |
| UVLO      | Undervoltage lockout           |                                                                                    | 32                              |                        | 34                  | V                |
| OVP       | Output Overvoltage Protection  |                                                                                    | 5.6                             |                        | 7.9                 | V                |
| $f_S$     | Switching frequency            | Over $V_I$ range                                                                   | 250                             | 300                    | 350                 | kHz              |
| SYNC      | Sync switching frequency       | Free-running                                                                       | 180                             | 215 <sup>(5)</sup>     | 250                 | kHz              |
|           |                                | Synchronization range                                                              | 250 <sup>(5)</sup>              |                        | 350 <sup>(5)</sup>  |                  |
|           | high-level input voltage       |                                                                                    | 3.5                             |                        | 6                   | V                |
|           | low-level input voltage        |                                                                                    | -0.3                            |                        | 0.5                 | V                |
|           | clock duty cycle               |                                                                                    | 25                              |                        | 75                  | %                |
| $C_I$     | External input capacitance     |                                                                                    | 0                               | 47                     |                     | $\mu\text{F}$    |
| $C_O$     | External output capacitance    |                                                                                    | 0                               | 47 <sup>(6)</sup>      | 1000                | $\mu\text{F}$    |
| $V_{ISO}$ | Isolation voltage              | Primary-Secondary                                                                  | 1,500                           |                        |                     | Vdc              |
| $C_{ISO}$ | Isolation capacitance          |                                                                                    |                                 | 1,100                  |                     | pF               |
| $R_{ISO}$ | Isolation resistance           |                                                                                    | 10                              |                        |                     | M $\Omega$       |

- (1) The converter requires a minimum load current for proper operation. However, the converter is not damaged when operated under a no-load condition.
- (2) See temperature derating curves for safe operating area (SOA), to determine output current derating at elevated ambient temperatures.
- (3) The set-point voltage tolerance is affected by the tolerance and stability of  $R_{TRIM}$ . The stated limit is unconditionally met if  $R_{TRIM}$  has a tolerance of  $\leq 1\%$ , with  $\leq 100\text{ ppm}/^\circ\text{C}$  temperature stability.
- (4) The Enable input (pin 3) has an internal pullup resistor. Do not place an external pullup resistor on this input pin. If the enable feature is not used, for a positive enable device this input should be left open circuit and a negative enable device should be permanently connected to  $V_I^-$  (pin 2). A discrete MOSFET or bipolar transistor is recommended for the enable control. The open-circuit voltage is typically less than 5 V. See the *Application Information* for a more detailed description.
- (5) A device with the synchronization option has a reduced switching frequency of 215 kHz typical. The synchronization frequency can only be adjusted to a higher frequency, up to 350 kHz maximum.
- (6) An output capacitor is not required for proper operation. However, additional capacitance at the load will improve the transient response.

**PTMA401120 ELECTRICAL CHARACTERISTICS**
 $T_A = 25^\circ\text{C}$ ,  $V_I = 48\text{ V}$ ,  $V_O = 12\text{ V}$ ,  $C_I = 0\text{ }\mu\text{F}$ ,  $C_O = 0\text{ }\mu\text{F}$ , and  $I_O = I_{O\text{max}}$  (Unless otherwise stated)


| PARAMETER                   |                                | TEST CONDITIONS                                                                    | PTMA401120         |                        |                     | UNIT             |
|-----------------------------|--------------------------------|------------------------------------------------------------------------------------|--------------------|------------------------|---------------------|------------------|
|                             |                                |                                                                                    | MIN                | TYP                    | MAX                 |                  |
| $P_O$                       | Output power                   | Over $V_I$ range                                                                   |                    |                        | 12                  | W                |
| $I_O$                       | Output current                 | Over $V_I$ range                                                                   | 0.1 <sup>(1)</sup> |                        | 1 <sup>(2)</sup>    | A                |
| $I_{\text{LIM}}$            | Current Limit Threshold        | Shutdown, followed by autorecovery                                                 |                    | 1.5                    |                     | A                |
| $V_I$                       | Input voltage range            | Over $I_O$ range                                                                   | 36                 | 48                     | 75                  | V                |
| $V_O$                       | Set-point voltage tolerance    |                                                                                    |                    | $\pm 2$ <sup>(3)</sup> |                     | % $V_O$          |
|                             | Temperature variation          | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$                                 |                    | $\pm 1$                |                     | % $V_O$          |
|                             | Line regulation                | Over $V_I$ range                                                                   |                    | 10                     |                     | mV               |
|                             | Load regulation                | Over $I_O$ range                                                                   |                    | 3                      |                     | mV               |
|                             | Total output voltage variation | Includes set-point, line, load, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$ |                    | 3                      | 5 <sup>(3)</sup>    | % $V_O$          |
|                             | Trim adjust range              | Over $V_I$ range                                                                   | 10.8               |                        | 13.2                | V                |
| $\eta$                      | Efficiency                     | $P_O = P_{O\text{max}}$                                                            |                    | 87%                    |                     |                  |
|                             | $V_O$ Ripple (peak-to-peak)    | 20-MHz bandwidth                                                                   |                    | 85                     |                     | mV <sub>pp</sub> |
| Transient Response          |                                | 0.1 A/ $\mu\text{s}$ load step, 50% to 100% $I_{O\text{max}}$                      |                    | 400                    |                     | $\mu\text{s}$    |
|                             |                                | $V_O$ over/undershoot                                                              |                    | $\pm 250$              |                     | mV               |
| Output enable input (pin 3) |                                | Referenced to $V_I^-$                                                              |                    |                        |                     |                  |
|                             |                                | Input high voltage ( $V_{IH}$ )                                                    | 4.5                |                        | Open <sup>(4)</sup> | V                |
|                             |                                | Input low voltage ( $V_{IL}$ )                                                     | –0.2               |                        | 0.8                 |                  |
|                             |                                | Input low current ( $I_{IL}$ )                                                     |                    | 1                      |                     | mA               |
| Standby input current       |                                | Pin 3 open                                                                         |                    | 8                      |                     | mA               |
| UVLO                        | Undervoltage lockout           |                                                                                    | 32                 |                        | 34                  | V                |
| OVP                         | Output Overvoltage Protection  |                                                                                    | 13.5               |                        | 17.5                | V                |
| $f_S$                       | Switching frequency            | Over $V_I$ range                                                                   | 250                | 300                    | 350                 | kHz              |
| SYNC                        | Sync switching frequency       | Free-running                                                                       | 180                | 215 <sup>(5)</sup>     | 250                 | kHz              |
|                             |                                | Synchronization range                                                              | 250 <sup>(5)</sup> |                        | 350 <sup>(5)</sup>  |                  |
|                             | high-level input voltage       |                                                                                    | 3.5                |                        | 6                   | V                |
|                             | low-level input voltage        |                                                                                    | –0.3               |                        | 0.5                 | V                |
|                             | clock duty cycle               |                                                                                    | 25                 |                        | 75                  | %                |
| $C_I$                       | External input capacitance     |                                                                                    | 0                  | 47                     |                     | $\mu\text{F}$    |
| $C_O$                       | External output capacitance    |                                                                                    | 0                  | 47 <sup>(6)</sup>      | 220                 | $\mu\text{F}$    |
| $V_{\text{ISO}}$            | Isolation voltage              | Primary-Secondary                                                                  | 1,500              |                        |                     | Vdc              |
| $C_{\text{ISO}}$            | Isolation capacitance          |                                                                                    |                    | 1,100                  |                     | pF               |
| $R_{\text{ISO}}$            | Isolation resistance           |                                                                                    | 10                 |                        |                     | M $\Omega$       |

- (1) The converter requires a minimum load current for proper operation. The converter is not damaged when operated under a no-load condition.
- (2) See temperature derating curves for safe operating area (SOA), to determine output current derating at elevated ambient temperatures.
- (3) The set-point voltage tolerance is affected by the tolerance and stability of  $R_{\text{TRIM}}$ . The stated limit is unconditionally met if  $R_{\text{TRIM}}$  has a tolerance of 1%, with 100 ppm/ $^\circ\text{C}$  temperature stability.
- (4) The Enable input (pin 3) has an internal pullup resistor. Do not place an external pullup resistor on this input pin. If the enable feature is not used, for a positive enable device this input should be left open circuit and a negative enable device should be permanently connected to  $V_I^-$  (pin 2). A discrete MOSFET or bipolar transistor is recommended for the enable control. The open-circuit voltage is typically less than 5 V. See the *Application Information* for a more detailed description.
- (5) A device with the synchronization option has a reduced switching frequency of 215 kHz typical. The synchronization frequency can only be adjusted to a higher frequency, up to 350 kHz maximum.
- (6) An output capacitor is not required for proper operation. However, additional capacitance at the load will improve the transient response.

**TERMINAL FUNCTIONS**

| <b>TERMINAL</b>            |            | <b>DESCRIPTION</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NAME</b>                | <b>NO.</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Enable/Sync <sup>(1)</sup> | 3          | The Enable input is an open-base logic input that is referenced to $V_{I-}$ . Two ON/OFF enable options are available, positive logic and negative logic. Positive logic devices are enabled by applying a logic high voltage (Open) and are disabled by applying a logic low voltage ( $V_{I-}$ ). Negative logic devices are enabled by applying a logic low voltage ( $V_{I-}$ ) and are disabled by applying a logic high voltage (Open). See the Application Information section for more detailed information.<br>This pin also has the option of a synchronization input. A module that has the synchronization option does not have ON/OFF enable control. A 5-V logic signal greater than the free-running frequency but $\leq 350$ kHz is required for synchronization control. See the Application Information section for more detailed information. |
| $V_{I-}^{(1)}$             | 2          | The negative input supply for the module, and the 0-V reference for the Enable/Sync inputs. When powering the module from a positive source, this input is connected to the input source return.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| $V_{I+}^{(1)}$             | 1          | The positive input for the module with respect to $V_{I-}$ . When powering the module from a negative input voltage, this input is connected to the input source ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| $V_{O+}$                   | 4          | This is the positive power output with respect to $V_{O-}$ . It is dc isolated from the input power pins.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Trim                       | 5          | This pin allows the output voltage set point of the module to be increased or decreased up to $\pm 10$ %. Connecting a resistor between this terminal and $V_{O+}$ decreases the output voltage set point. Connecting a resistor between this terminal and $V_{O-}$ increases the output voltage set point. A 0.05-W rated resistor may be used, with tolerance and temperature stability of 1% and 100 ppm/ $^{\circ}$ C, respectively. If left open circuit, the converter output voltage defaults to its nominal value. The specification table gives the standard resistor values for the most common output voltages.                                                                                                                                                                                                                                       |
| $V_{O-}$                   | 6          | This is the output power return for the $V_{O+}$ bus. This terminal should be connected to the common of the load circuit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

(1) These functions indicate signals electrically common with the input.

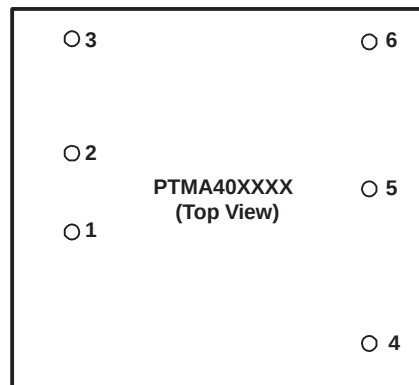

## TYPICAL CHARACTERISTICS

### PTMA403033 Characteristic Data ( $V_O = 3.3\text{ V}$ ) <sup>(1)(2)</sup>

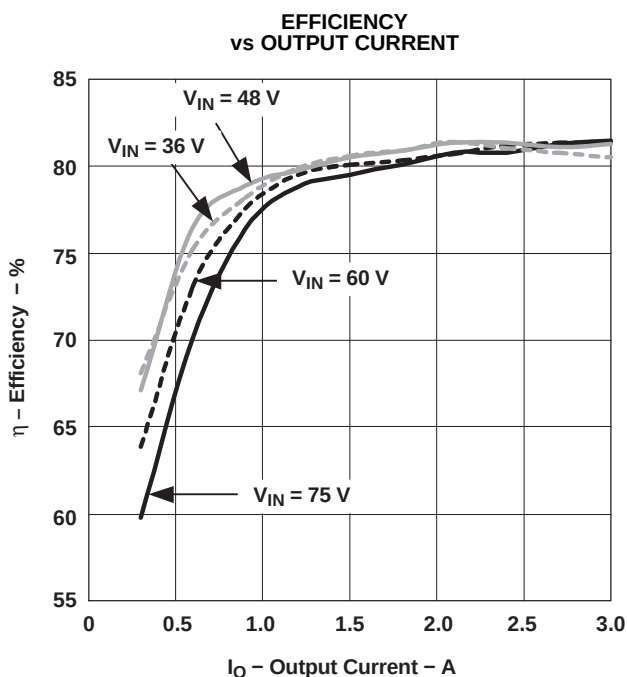


Figure 1.

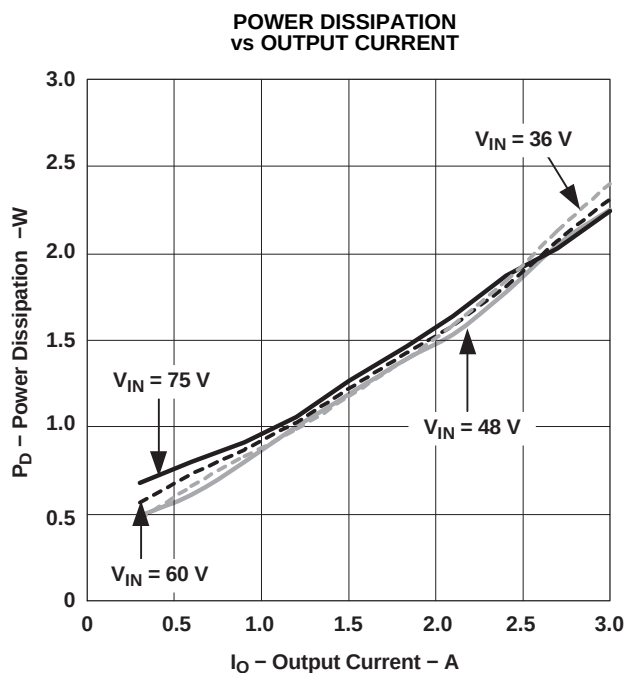


Figure 2.

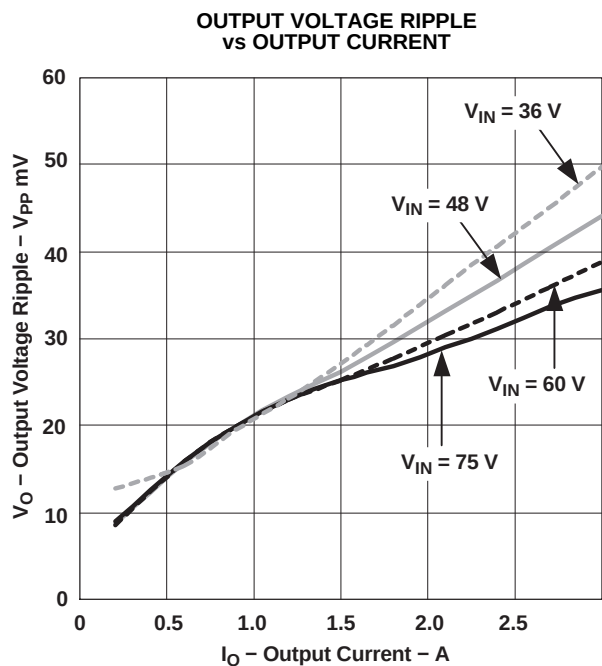


Figure 3.

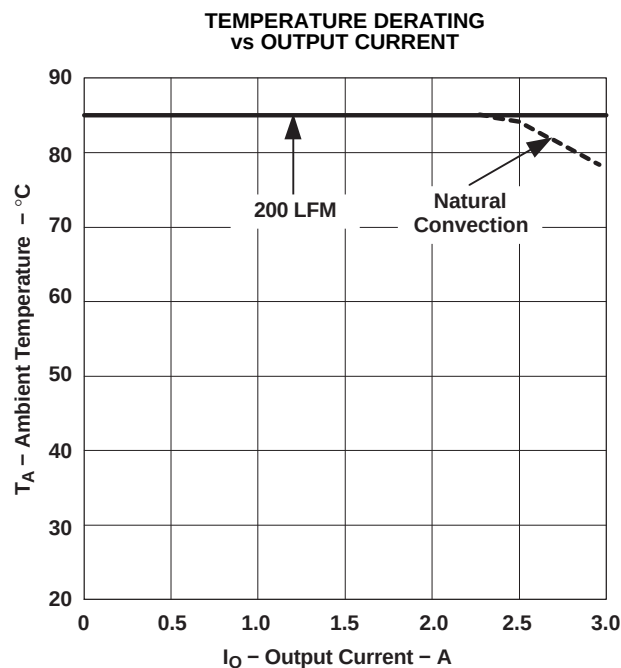


Figure 4.

- (1) All data listed in Figure 1, Figure 2, and Figure 3 have been developed from actual products tested at 25°C. This data is considered typical data for the dc-dc converter.
- (2) The temperature derating curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperature. Derating limits apply to modules soldered directly to a 100-mm × 100-mm, double-sided PCB with 2 oz. copper. For surface mount packages, multiple vias (plated through holes) are required to add thermal paths around the power pins. Please refer to the mechanical specification for more information. Applies to Figure 4.

## TYPICAL CHARACTERISTICS (continued)

### PTMA402050 Characteristic Data ( $V_O = 5\text{ V}$ ) <sup>(3)(4)</sup>

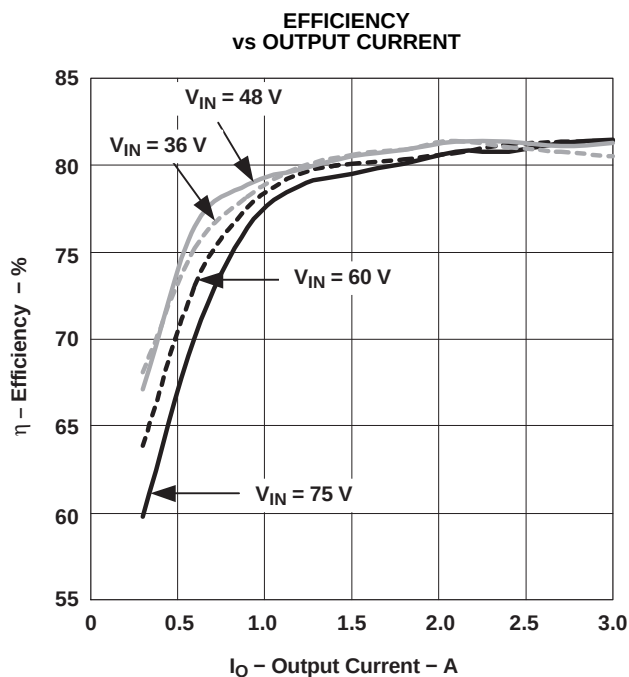


Figure 5.

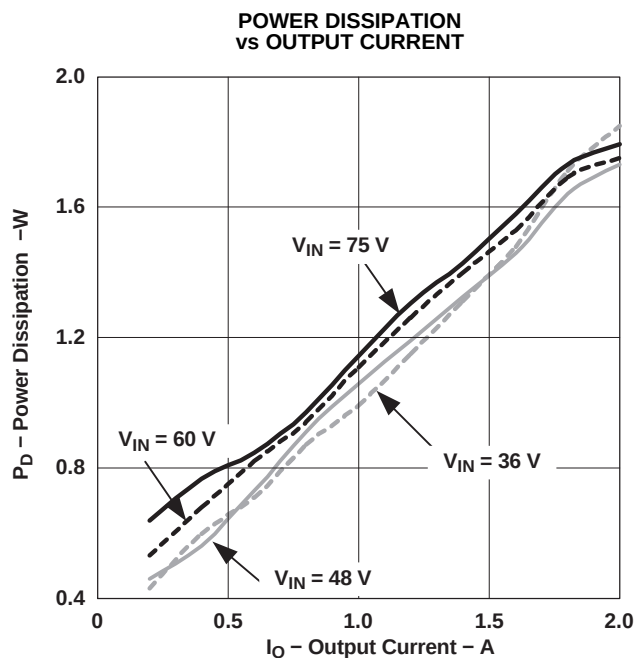


Figure 6.

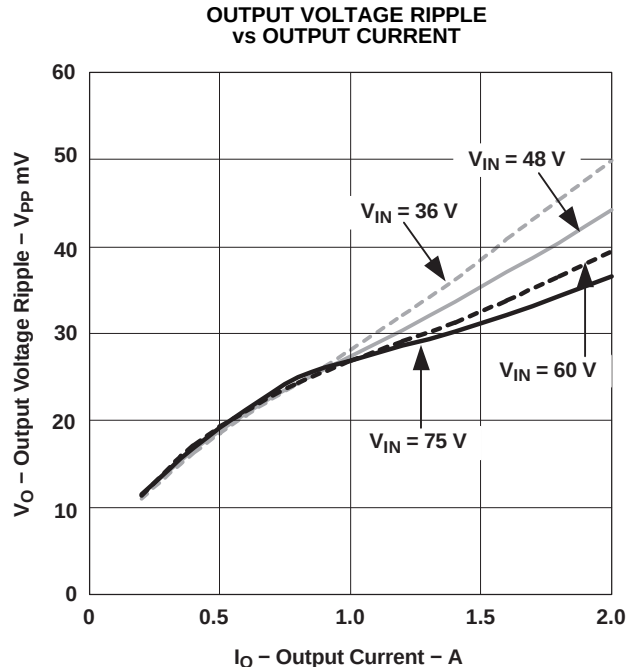


Figure 7.

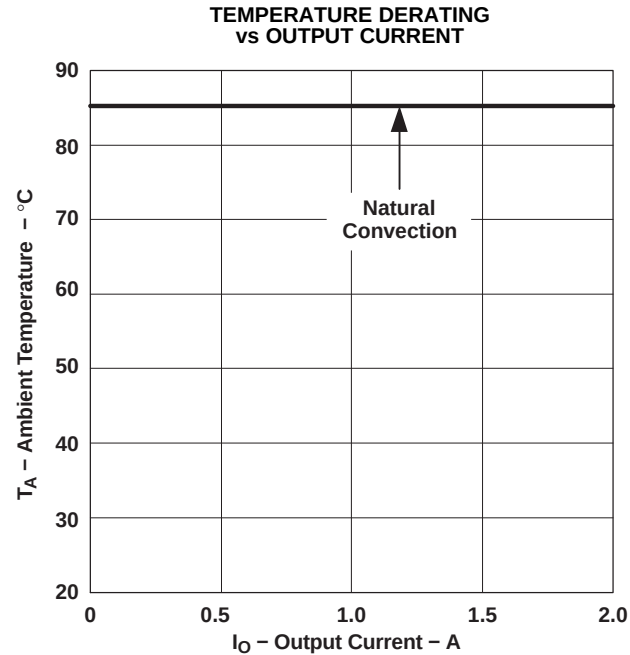


Figure 8.

- (3) All data listed in [Figure 5](#), [Figure 7](#), and [Figure 6](#) have been developed from actual products tested at  $25^{\circ}\text{C}$ . This data is considered typical data for the dc-dc converter.
- (4) The temperature derating curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperature. Derating limits apply to modules soldered directly to a 100-mm  $\times$  100-mm, double-sided PCB with 2 oz. copper. For surface mount packages, multiple vias (plated through holes) are required to add thermal paths around the power pins. Please refer to the mechanical specification for more information. Applies to [Figure 8](#).



## TYPICAL CHARACTERISTICS (continued)

### PTMA401120 Characteristic Data ( $V_O = 12\text{ V}$ ) <sup>(5)(6)</sup>

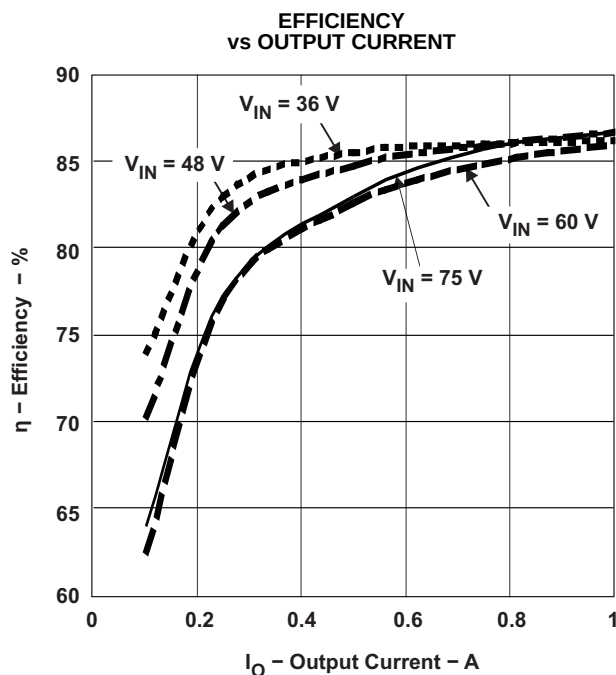


Figure 9.

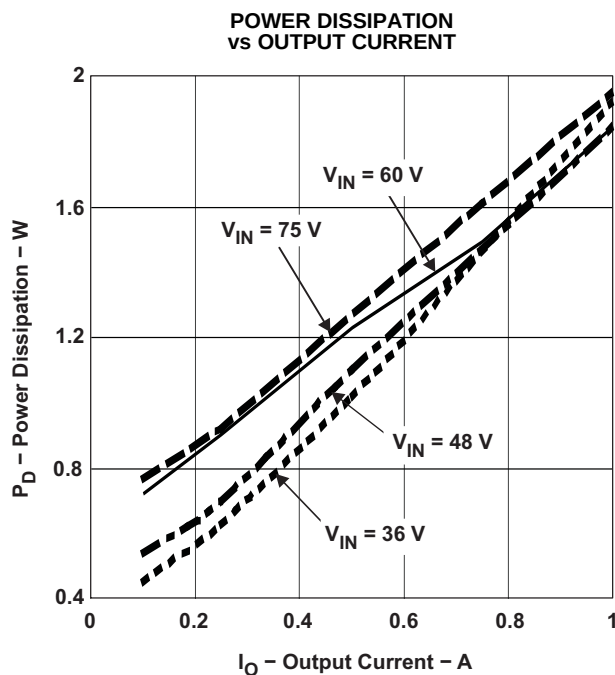


Figure 10.

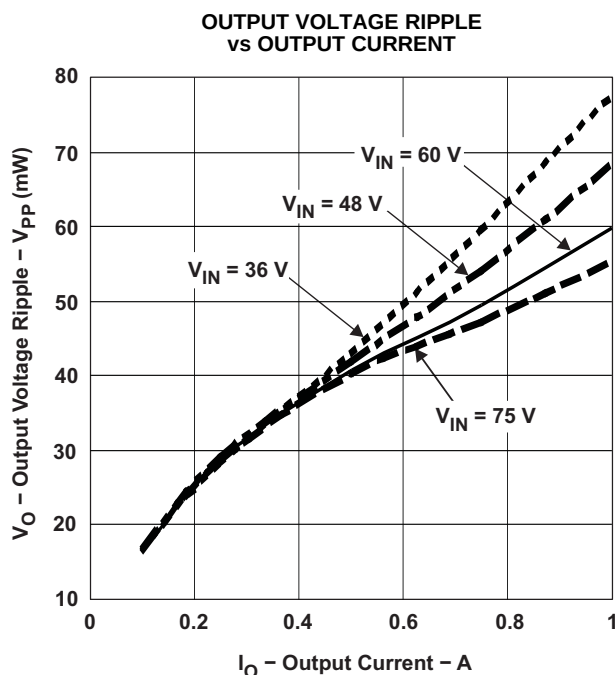


Figure 11.

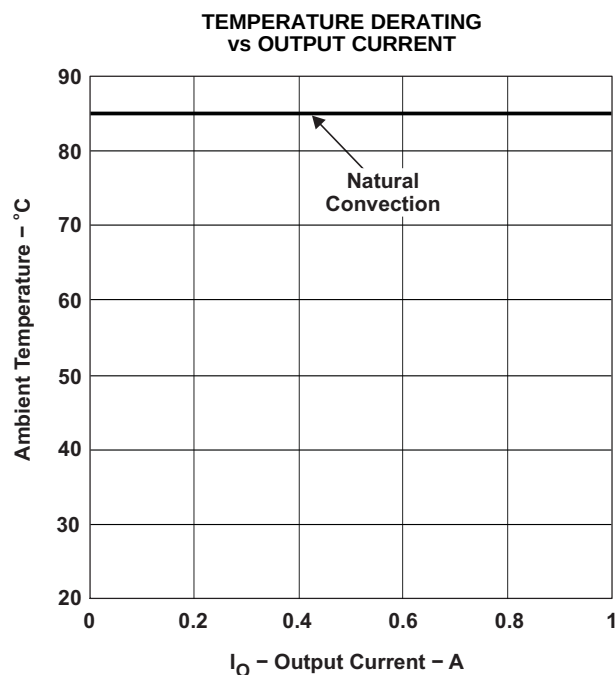


Figure 12.

- (5) All data listed in [Figure 9](#), [Figure 10](#), and [Figure 11](#) have been developed from actual products tested at 25°C. This data is considered typical data for the dc-dc converter.
- (6) The temperature derating curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperature. Derating limits apply to modules soldered directly to a 100-mm × 100-mm, double-sided PCB with 2 oz. copper. For surface mount packages, multiple vias (plated through holes) are required to add thermal paths around the power pins. Please refer to the mechanical specification for more information. Applies to [Figure 12](#).

## APPLICATION INFORMATION

### Operating Features and System Considerations for the PTMA40XX DC/DC Converters

#### Primary-Secondary Isolation

These converters incorporate electrical isolation between the input terminals (primary) and the output terminals (secondary). All converters are tested to a withstand voltage of 1500 Vdc. This complies with UL/cUL 60950 and EN 60950 and the requirements for functional isolation. It allows the converter to be configured for either a positive or negative input voltage source. The data sheet *Terminal Functions* table provides guidance as to the correct reference that must be used for the external control signals.

#### Undervoltage Lockout

The undervoltage lockout (UVLO) is designed to prevent the operation of the converter until the input voltage is close to the minimum operating voltage. The converter is held off when the input voltage is below the UVLO threshold, and turns on when the input voltage rises above the threshold. This prevents high start-up current during normal power up of the converter, and minimizes the current drain from the input source during low input voltage conditions. The converter meets full specifications when the minimum specified input voltage is reached. The UVLO circuitry also overrides the operation of the enable or synchronization controls. Only when the input voltage is above the UVLO threshold does this input become functional.

#### Output Overvoltage Clamp

The module is protected from an overvoltage on the output using an internal clamp. This protects against a break in the feedback path as well as a ground fault on the external Trim resistor, which would cause the output voltage to increase.

#### Overcurrent Protection

To protect against load faults, these converters incorporate output overcurrent protection. Applying a load to the output that exceeds the converter overcurrent threshold (see applicable specification) causes the output voltage to momentarily fold back, and then shut down. Following shutdown, the module periodically attempts to automatically recover by initiating a soft-start power up. This is often described as a *hiccup* mode of operation, whereby the module continues in the cycle of successive shutdown and power up until the load fault is removed. Once the fault is removed, the converter automatically recovers and returns to normal operation.

#### Soft-Start Power Up

When the converter is first powered, the internal soft-start circuit limits how fast the output voltage can rise. The soft-start circuit functions after a valid input source is applied and the output is enabled, after the converter output is enabled using the Enable input, or on a recovery from a load fault. The purpose of the soft-start feature is to limit the surge of current drawn from the input source when the converter begins to operate. By limiting the rate at which the output voltage rises, the magnitude of current required to charge up the load circuit capacitance is significantly reduced.

[Figure 13](#) shows the power-up characteristic of a PTMA403033 converter. The output voltage is 3.3 V. The soft-start circuit causes a slow, soft rise of the output voltage. The output voltage will begin to rise after a time delay (typically 85 ms-100 ms) once a valid input voltage is applied. The output then progressively rises to the voltage set-point. The waveforms were recorded with a resistive load of 3 A.

## APPLICATION INFORMATION (continued)

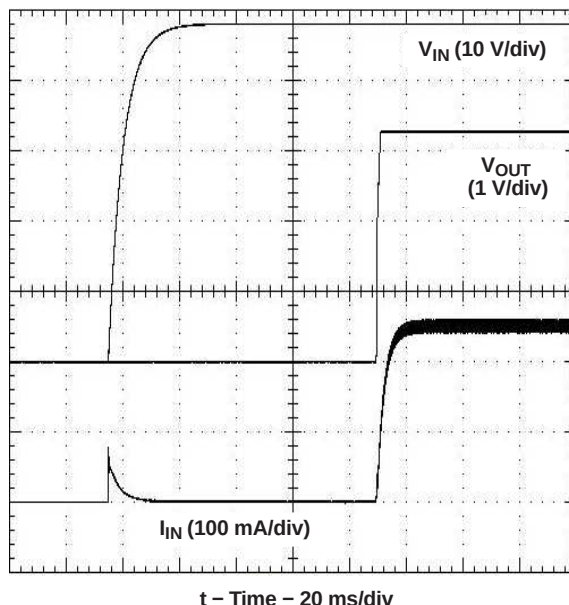


Figure 13. Power-up Waveforms

### Output Voltage Trim Adjustment

An external resistor is required to increase or decrease the output voltage set point of the module by  $\pm 10\%$ . The resistor,  $R_{TRIM}$ , must be connected between the TRIM pin (pin 5) and  $V_{O+}$  (pin 4) to decrease the output voltage, or between the TRIM pin and  $V_{O-}$  (pin 6) to increase the output voltage. A 0.05-W rated resistor can be used. The tolerance should be 1%, with a temperature stability of 100 ppm/°C (or better). Place the resistor close to the converter and connect it using dedicated PCB traces (see Figure 14). Table 1 gives the nearest standard value of external resistor for the common voltages within each model's adjust range.

Table 1. Standard Values of  $R_{TRIM}$  for Common Output Voltages

| PTMA403033          |                          |      | PTMA402050          |                          |      | PTMA401120          |                          |      |
|---------------------|--------------------------|------|---------------------|--------------------------|------|---------------------|--------------------------|------|
| $V_O$<br>(required) | $R_{TRIM}$ (k $\Omega$ ) |      | $V_O$<br>(required) | $R_{TRIM}$ (k $\Omega$ ) |      | $V_O$<br>(required) | $R_{TRIM}$ (k $\Omega$ ) |      |
|                     | down                     | up   |                     | down                     | up   |                     | down                     | up   |
| 3.0 V               | 118                      | —    | 4.5 V               | 18.7                     | —    | 10.8 V              | 64.9                     | —    |
| 3.1 V               | 187                      | —    | 4.6 V               | 24.9                     | —    | 11.0 V              | 80.6                     | —    |
| 3.2 V               | 392                      | —    | 4.7 V               | 35.7                     | —    | 11.2 V              | 105                      | —    |
| 3.3 V               | open                     | open | 4.8 V               | 57.6                     | —    | 11.4 V              | 143                      | —    |
| 3.4 V               | —                        | 249  | 4.9 V               | 121                      | —    | 11.6 V              | 221                      | —    |
| 3.5 V               | —                        | 124  | 5.0 V               | open                     | open | 11.8 V              | 464                      | —    |
| 3.6 V               | —                        | 82.5 | 5.1 V               | —                        | 124  | 12.0 V              | open                     | open |
| —                   | —                        | —    | 5.2 V               | —                        | 61.9 | 12.2 V              | —                        | 118  |
| —                   | —                        | —    | 5.3 V               | —                        | 40.2 | 12.4 V              | —                        | 57.6 |
| —                   | —                        | —    | 5.4 V               | —                        | 29.4 | 12.6 V              | —                        | 36.5 |
| —                   | —                        | —    | 5.5 V               | —                        | 23.2 | 12.8 V              | —                        | 26.1 |
| —                   | —                        | —    | —                   | —                        | —    | 13.0 V              | —                        | 19.6 |
| —                   | —                        | —    | —                   | —                        | —    | 13.2 V              | —                        | 15.8 |

For other output voltages, the value of the required trim resistor may be calculated using Equation 1 to adjust the voltage up or Equation 2 to adjust the voltage down.


$$R_{\text{TRIM(up)}} = \frac{R_O \times V_R}{(V_O - V_{\text{SET}})} - R_P \text{ (k}\Omega\text{)} \quad (1)$$

$$R_{\text{TRIM(dwn)}} = \frac{R_O \times (V_O - V_R)}{(V_{\text{SET}} - V_O)} - R_P \text{ (k}\Omega\text{)} \quad (2)$$

Table 2 gives the required  $R_{\text{TRIM}}$  equation constants for the converter model selected. To calculate the required value of  $R_{\text{TRIM}}$ , simply locate the applicable constants and substitute these into the formula along with the desired output voltage.

**Table 2. Trim Adjust Equation Constants**

| Constants            | PTMA403033             | PTMA402050             | PTMA401120             |
|----------------------|------------------------|------------------------|------------------------|
| $V_R$ (V)            | 1.24                   | 2.50                   | 2.50                   |
| $R_O$ ( $\Omega$ )   | 20                     | 5.11                   | 10                     |
| $R_P$ ( $\Omega$ )   | 1.0                    | 2.05                   | 5.11                   |
| $V_{\text{SET}}$ (V) | 3.3                    | 5.0                    | 12.0                   |
| $V_O$ (V)            | Desired Output Voltage | Desired Output Voltage | Desired Output Voltage |

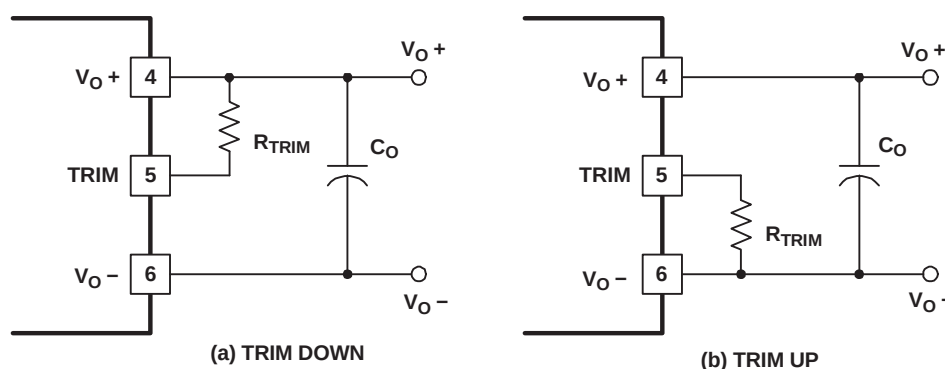

**Figure 14. Output Voltage Adjustment**

### Thermal Considerations

Airflow may be necessary to ensure that the module can supply the desired load current in environments with elevated ambient temperatures. The required airflow rate is determined from the safe operating area (SOA). The SOA is the area beneath the applicable airflow rate curve on the graph of temperature derating vs output current. (See the Typical Characteristics.) Operating the converter within the SOA limits ensures that all the internal components are at or below their stated maximum operating temperatures.

### On/Off Enable Controls

On/Off enable options include positive logic or negative logic. A positive logic device enables the module's output when a logic high voltage is present on the Enable pin (pin 3) and disables the output with a logic low voltage. A negative logic device disables the output when a logic high voltage is present on the Enable pin and enables the output during a logic low voltage. See the Electrical Characteristics table for logic high and logic low limits. The Enable pin is ideally controlled with an open-collector (or open-drain) discrete transistor. See Figure 15 below for a typical On/Off Enable control circuit. For automatic start-up, the Enable pin should be left open for a positive logic module and should be shorted to  $V_{I-}$  (pin 2) for a negative logic module. Both inputs are electrically referenced to  $V_{I-}$  on the primary (input) side of the converter. Do not place an external pull-up resistor on this input pin.

## Enable Control Schematic

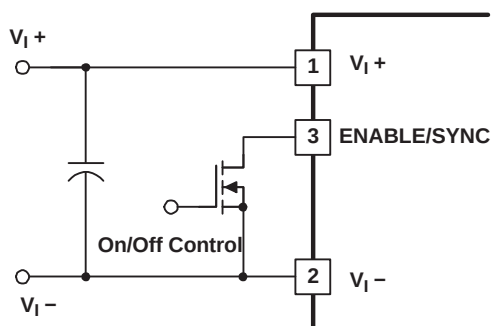


Figure 15. Typical On/Off Enable Control Circuit

## On/Off Enable Turn-On Time

Once enabled, the converter executes a soft-start power up. The converter exhibits a short delay of approximately 100  $\mu$ s, measured from the transition of the enable signal to the instance the  $V_O$  Bus output begins to rise. The output is in regulation within 1.5 ms.

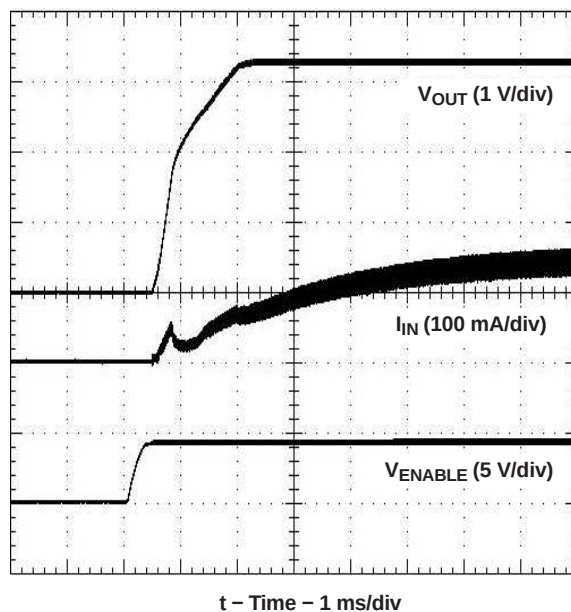


Figure 16. Output Enable Power-Up Characteristic

## Synchronization

The Synchronization option allows multiple power modules to be synchronized to a common frequency. Driving the Sync pin (pin 3) with an external clock set to the desired frequency, synchronizes all connected modules to that frequency. Modules with the synchronization option have a reduced free-running switching frequency of 215 kHz typical. The synchronization frequency can only be adjusted to a higher frequency, up to 350 kHz. A 5-V logic signal is recommended for control. See Figure 17. See the Electrical Characteristics table for synchronization limits.


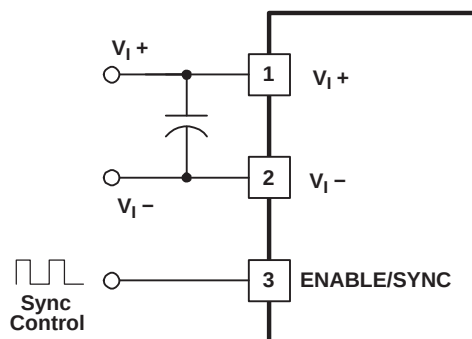


Figure 17. Synchronization Control

## MECHANICALS

### Tape and Reel



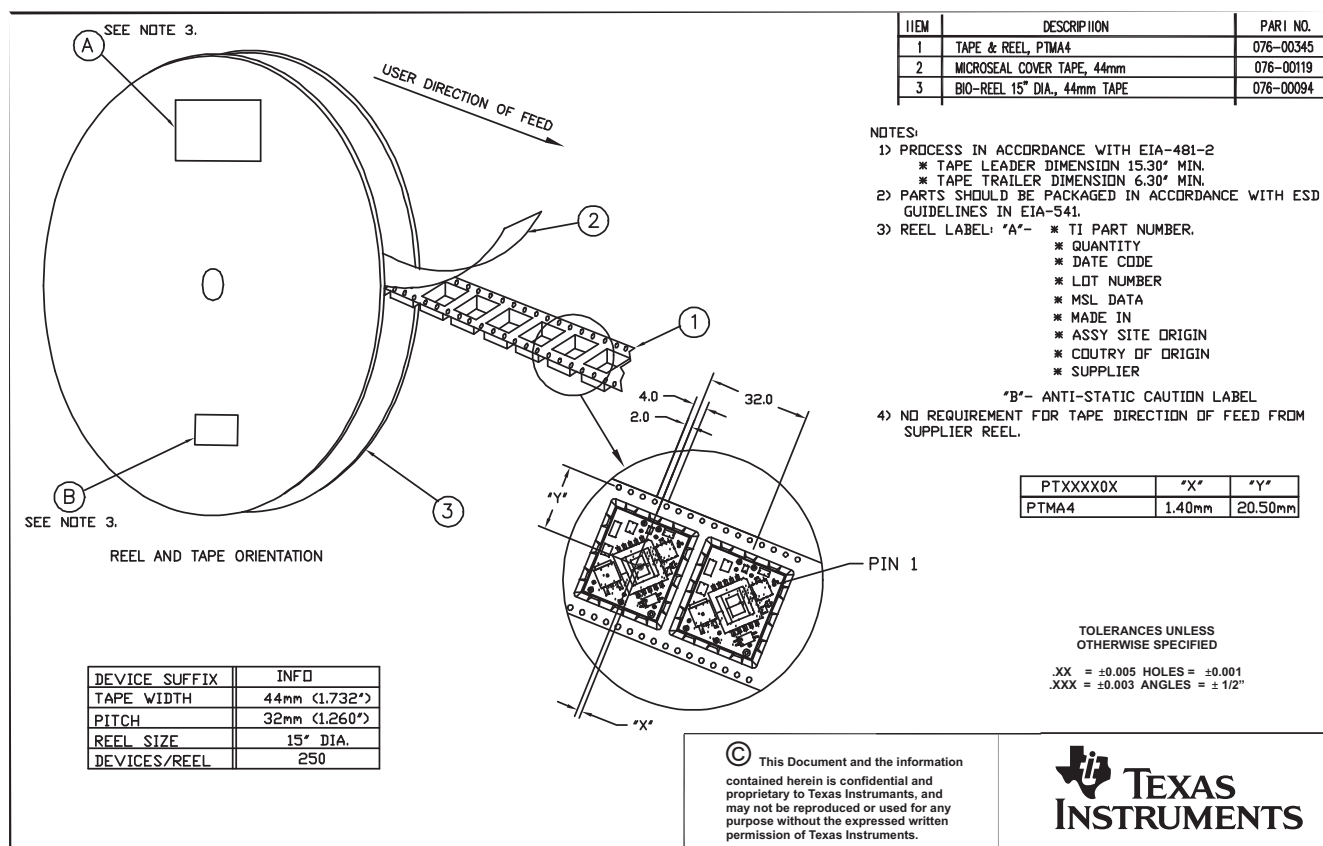

## PACKAGING INFORMATION

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins                    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C)          | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-----------------------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|-----------------------|---------------------|
| PTMA401120A1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120A1AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120A1AD |                     |
| PTMA401120A1AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   4 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -                     |                     |
| PTMA401120A2AD        | NRND          | Production           | Through-Hole<br>Module (EEV)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120A2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEV)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120A2AD |                     |
| PTMA401120N1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120N1AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120N1AD |                     |
| PTMA401120N2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120N2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120N2AD |                     |
| PTMA401120P1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120P1AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120P1AD |                     |
| PTMA401120P2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -                     |                     |
| PTMA401120P2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | See<br>PTMA401120P2AD |                     |
| PTMA401120P2AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -                     |                     |
| PTMA402050A1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85             |                     |
| PTMA402050A1AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85             |                     |



| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins                    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5)          | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-----------------------------------|-----------------------|-------------|--------------------------------------|--------------------------------------------|--------------|---------------------|
| PTMA402050A1AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   4 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTMA402050A1AZ.B      | NRND          | Production           | Surface Mount<br>Module (BET)   4 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTMA402050A2AD        | NRND          | Production           | Through-Hole<br>Module (EEV)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050A2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEV)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050A3AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050A3AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050N2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050N2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050N2AS        | NRND          | Production           | Surface Mount<br>Module (EET)   6 | 30   TIW TRAY         | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| PTMA402050N2AS.B      | NRND          | Production           | Surface Mount<br>Module (EET)   6 | 30   TIW TRAY         | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| PTMA402050N2AST       | NRND          | Production           | Surface Mount<br>Module (EET)   6 | 250   SMALL T&R       | -           |                                      |                                            | -40 to 85    |                     |
| PTMA402050N2AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTMA402050N2AZ.B      | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTMA402050P2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050P2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTMA402050P2AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTMA402050P2AZ.B      | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins                    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-----------------------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| PTMA403033A1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033A1AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   4  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033A1AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   4 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -40 to 85    |                     |
| PTMA403033A1AZ.B      | NRND          | Production           | Surface Mount<br>Module (BET)   4 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -40 to 85    |                     |
| PTMA403033A3AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033A3AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -40 to 85    |                     |
| PTMA403033N1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033N1AZT       | NRND          | Production           | Surface Mount<br>Module (BET)   5 | 250   SMALL T&R       | -           |                                      |                                   | -40 to 85    |                     |
| PTMA403033N2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033N2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033N2AZ        | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -40 to 85    |                     |
| PTMA403033N2AZ.B      | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 30   TIW TRAY         | In-Work     | SNAGCU                               | Level-3-260C-168 HR               | -40 to 85    |                     |
| PTMA403033N2AZT       | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 250   SMALL T&R       | -           |                                      |                                   | -40 to 85    |                     |
| PTMA403033N2AZT.B     | NRND          | Production           | Surface Mount<br>Module (BET)   6 | 250   SMALL T&R       | -           | Call TI                              | Call TI                           | -40 to 85    |                     |
| PTMA403033P1AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   5  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033P2AD        | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |
| PTMA403033P2AD.B      | NRND          | Production           | Through-Hole<br>Module (EEP)   6  | 30   TIW TRAY         | In-Work     | SN                                   | N/A for Pkg Type                  | -40 to 85    |                     |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## BET (R-PDSS-B4)


## DOUBLE SIDED MODULE

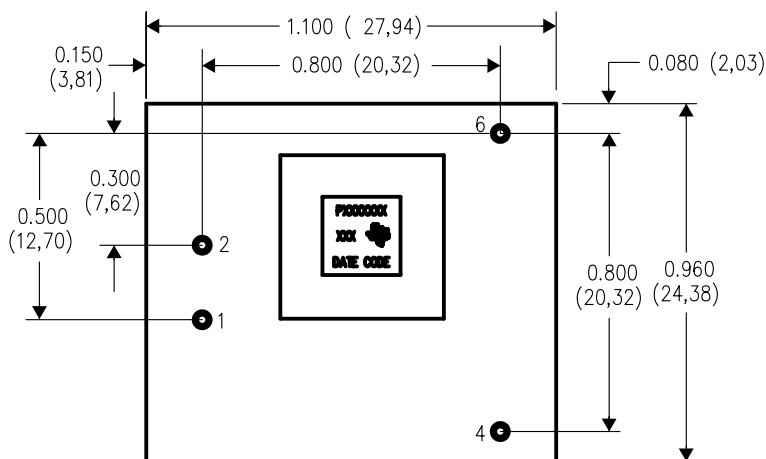


TOP VIEW

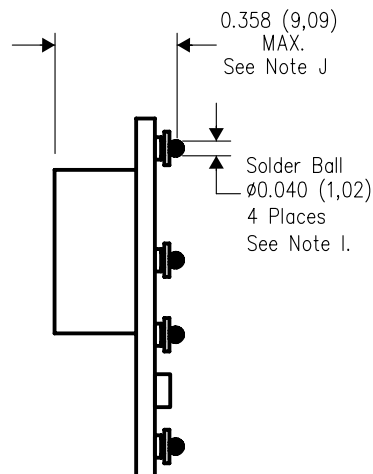

SIDE VIEW

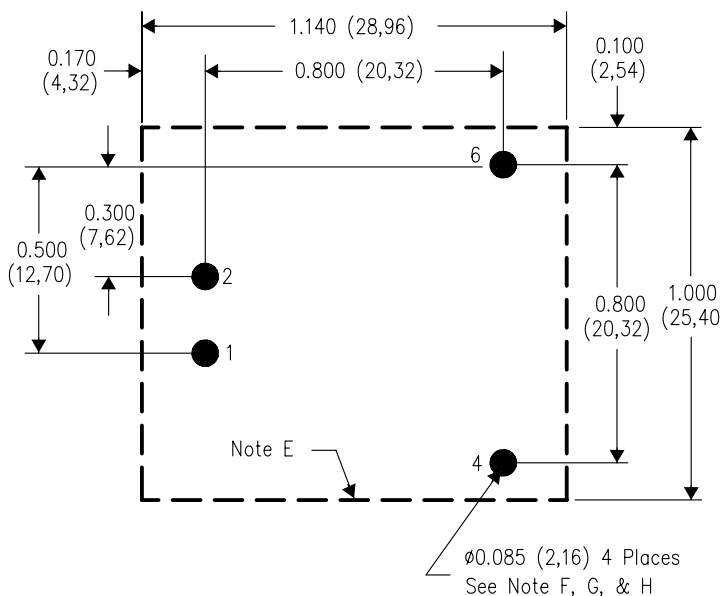

PC LAYOUT

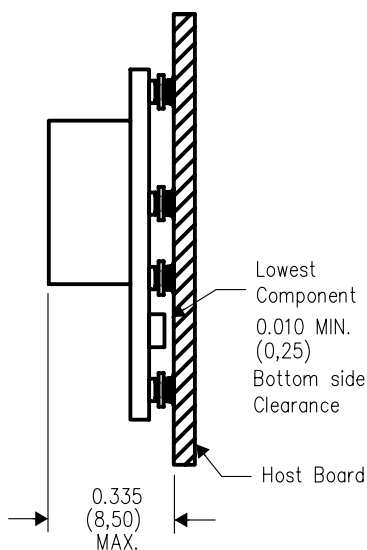


4207711-2/B 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.
  - Power pin connection should utilize four or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).


- Paste screen opening: 0.080 (2,03) to 0.085 (2,16).  
Paste screen thickness: 0.006 (0,15).
- Pad type: Solder mask defined.
- This is a lead-free solder ball design.  
Finish: Tin (100%) over Nickel plate  
Solder ball: 96.5 Sn/3.0 Ag/0.5 Cu
- Dimension prior to reflow solder.

## BET (R-PDSS-B5)


## DOUBLE SIDED MODULE

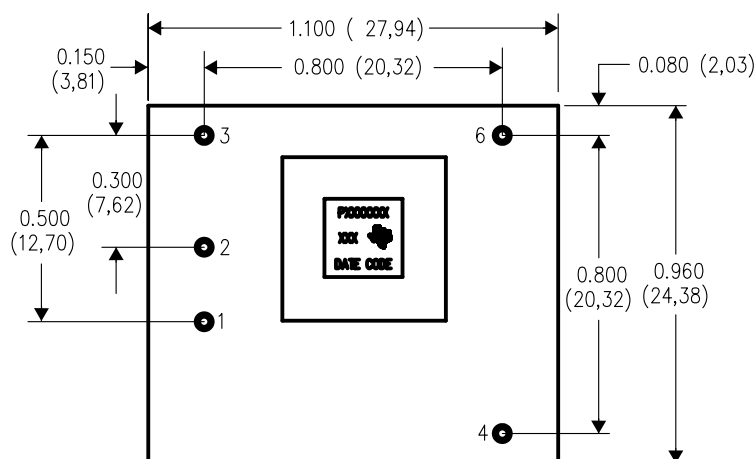


TOP VIEW

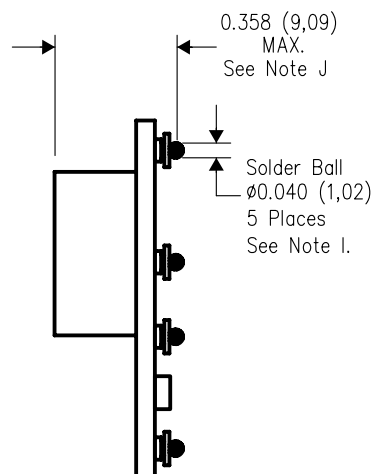

SIDE VIEW

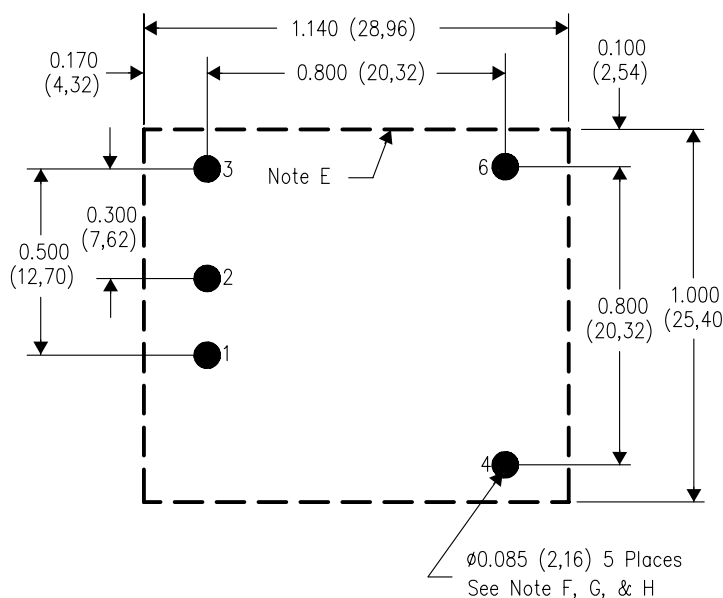

PC LAYOUT

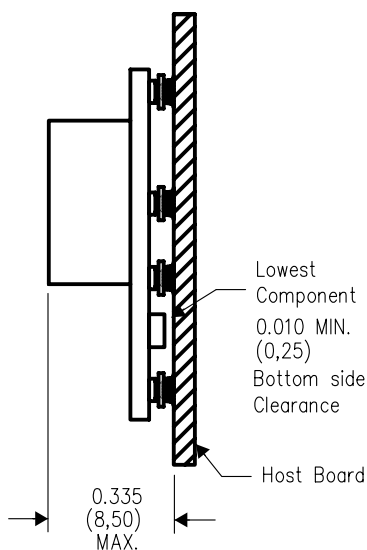


4207711-3/B 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.
  - Power pin connection should utilize four or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).


- Paste screen opening: 0.080 (2,03) to 0.085 (2,16).  
Paste screen thickness: 0.006 (0,15).
- Pad type: Solder mask defined.
- This is a lead-free solder ball design.  
Finish: Tin (100%) over Nickel plate  
Solder ball: 96.5 Sn/3.0 Ag/0.5 Cu
- Dimension prior to reflow solder.

## EEP (R-PDSS-T6)


## DOUBLE SIDED MODULE

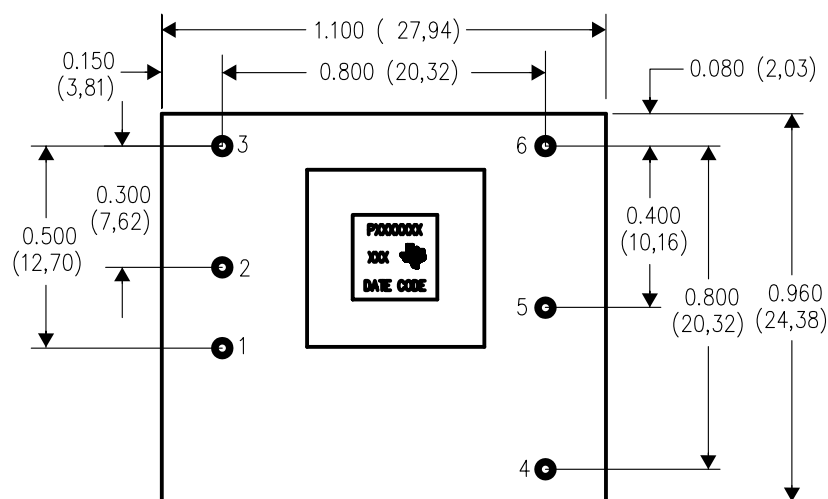

TOP VIEW

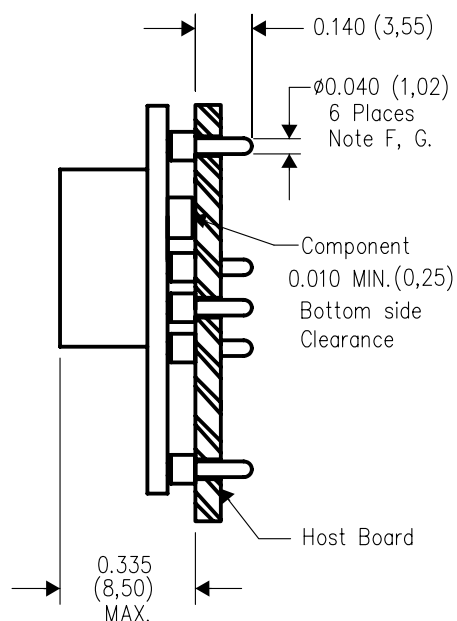

SIDE VIEW

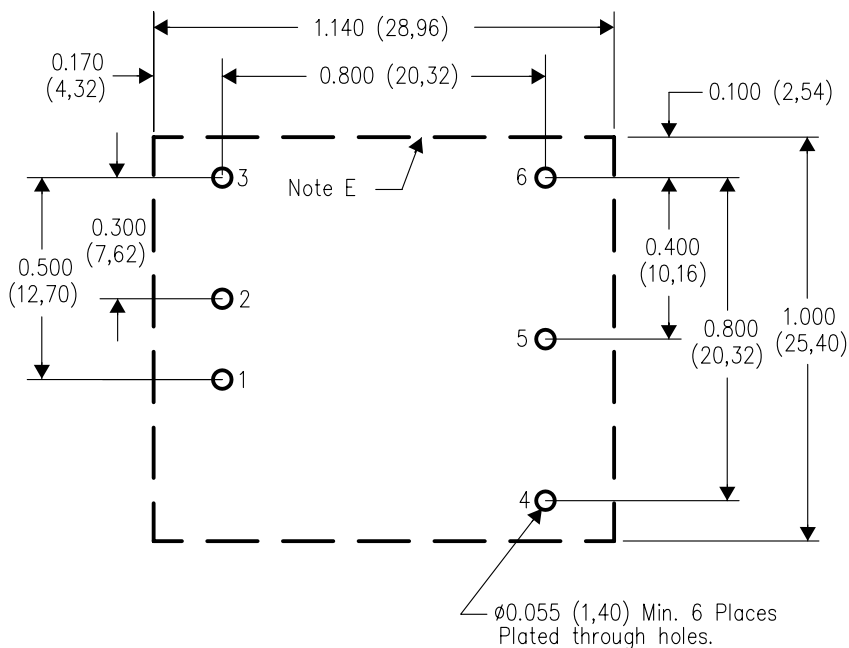

PC LAYOUT


4207367-4/C 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.


- Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate

## BET (R-PDSS-B6)


## DOUBLE SIDED MODULE

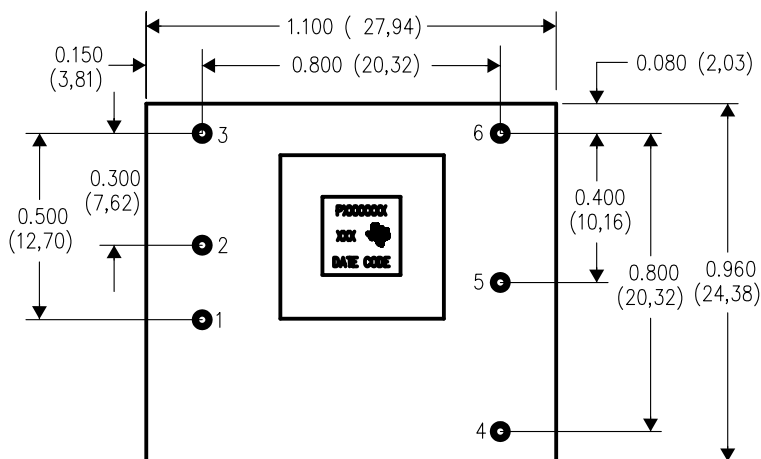


TOP VIEW

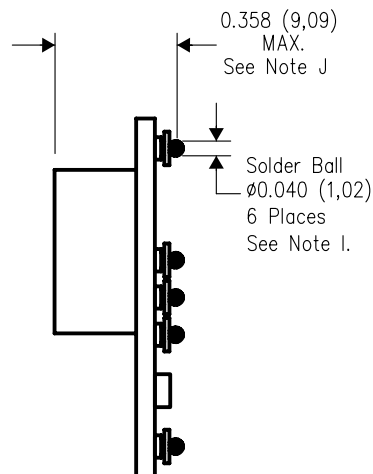

SIDE VIEW

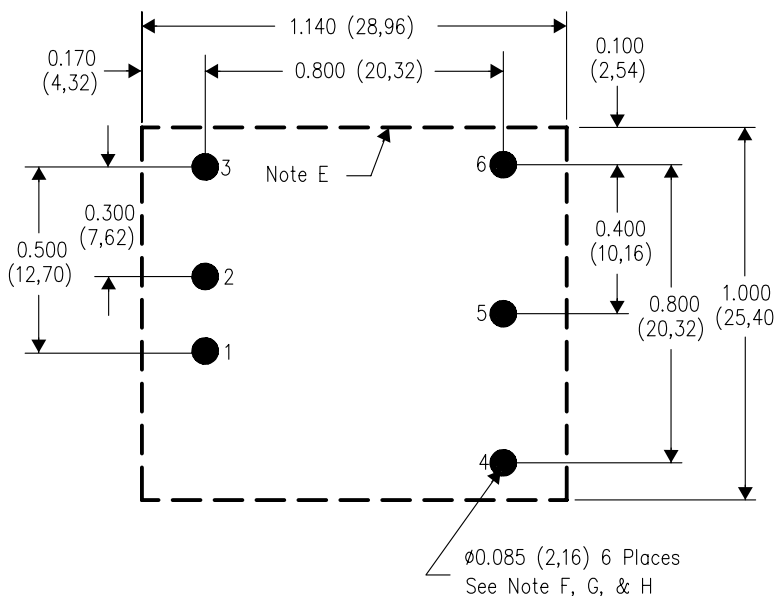

PC LAYOUT

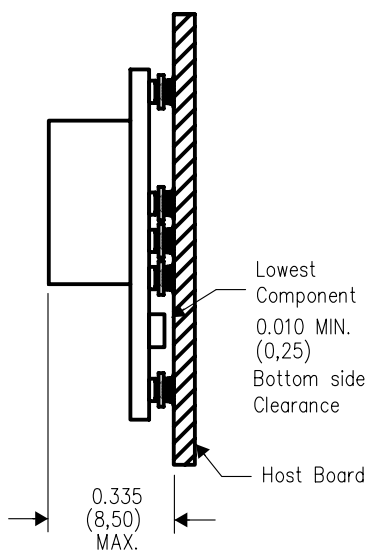


4207711-4/B 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.
  - Power pin connection should utilize four or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).


- Paste screen opening: 0.080 (2,03) to 0.085 (2,16).  
Paste screen thickness: 0.006 (0,15).
- Pad type: Solder mask defined.
- This is a lead-free solder ball design.  
Finish: Tin (100%) over Nickel plate  
Solder ball: 96.5 Sn/3.0 Ag/0.5 Cu
- Dimension prior to reflow solder.

## EEP (R-PDSS-T4)


## DOUBLE SIDED MODULE

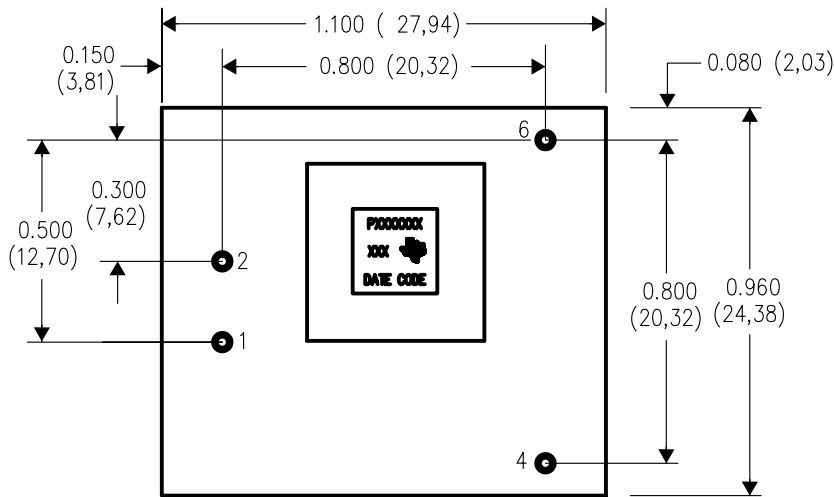

TOP VIEW

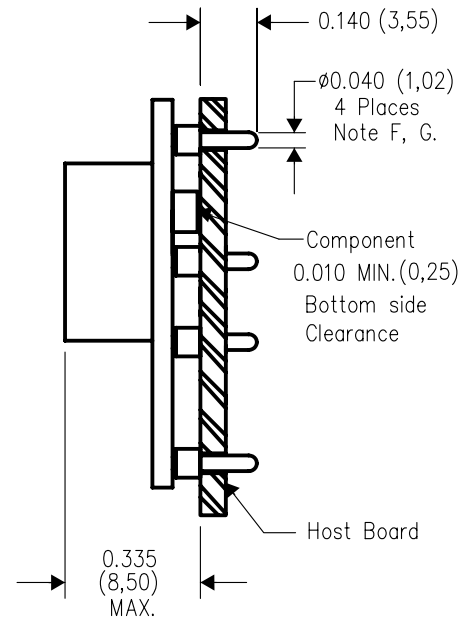

SIDE VIEW

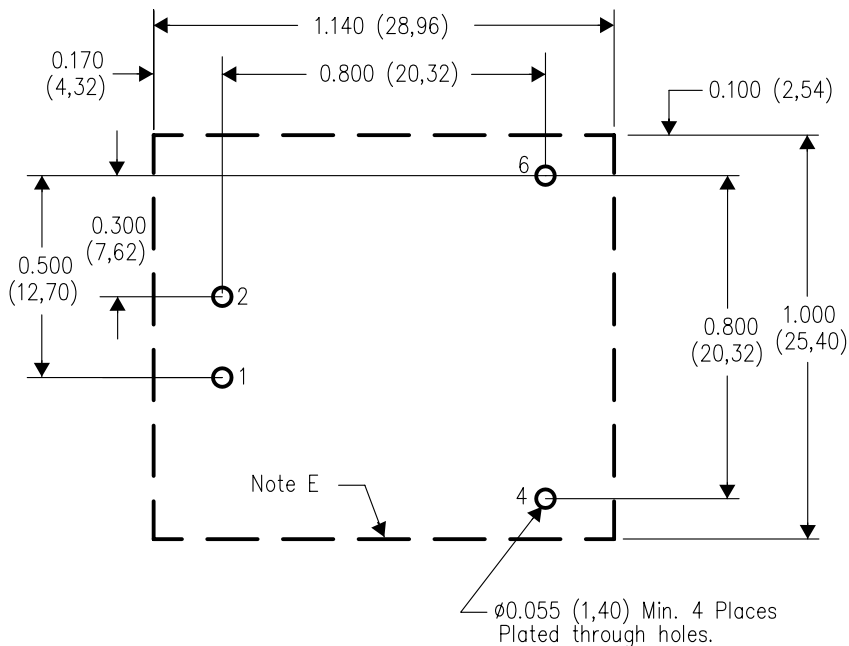

PC LAYOUT

4207367-2/C 02/06


- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.

- Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate




## EEP (R-PDSS-T5)


## DOUBLE SIDED MODULE

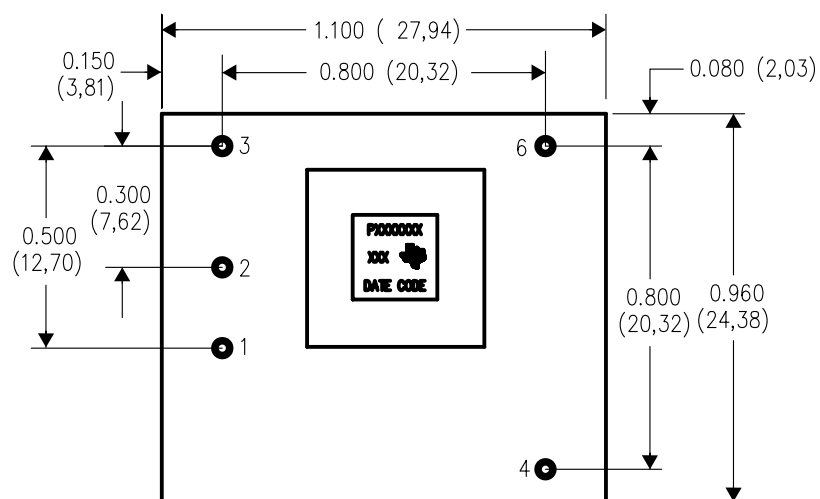

TOP VIEW

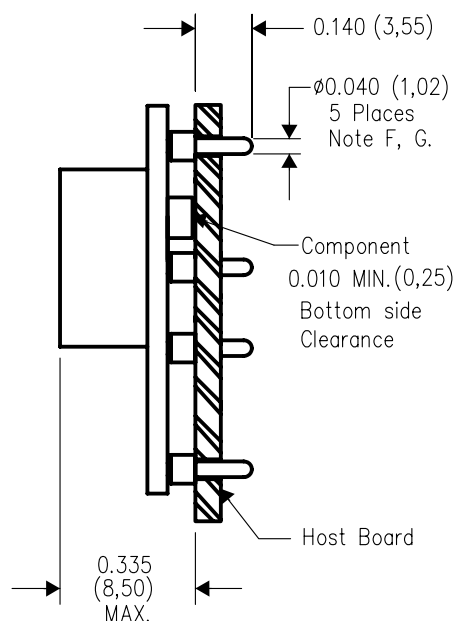

SIDE VIEW

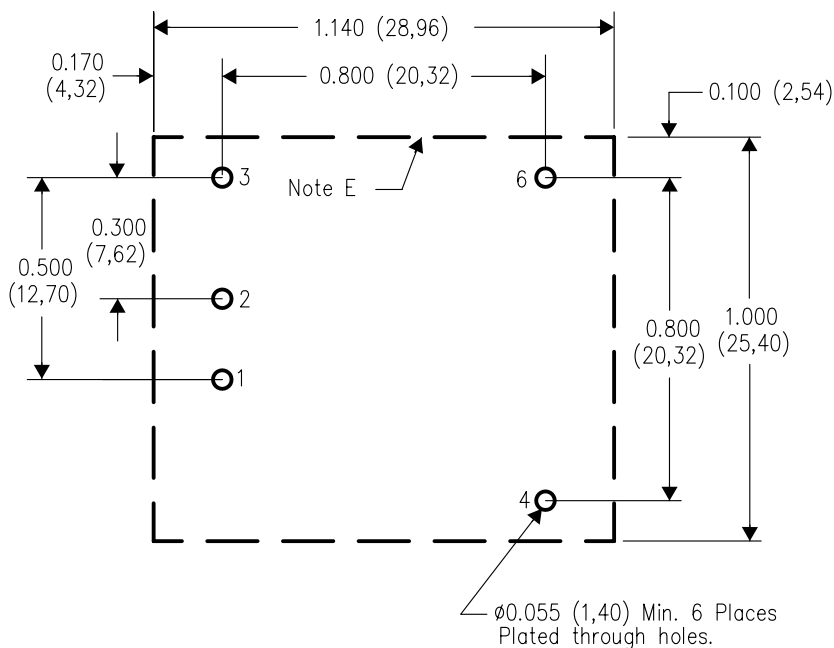

PC LAYOUT


4207367-3/C 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.


- Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate

## EEV (R-PDSS-T5)


## DOUBLE SIDED MODULE

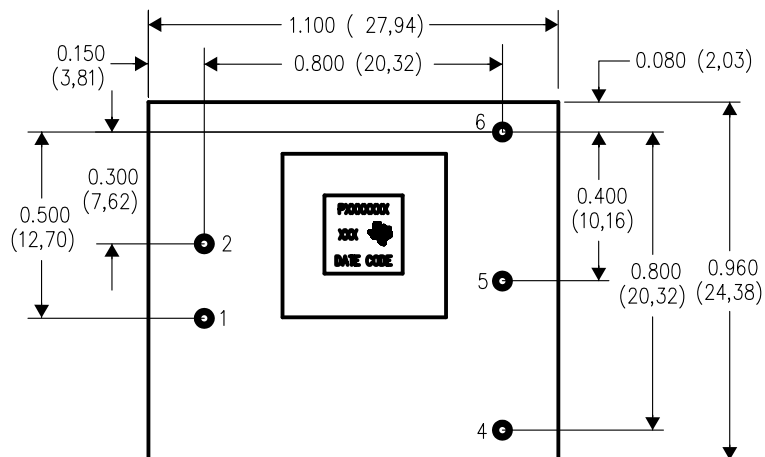

TOP VIEW

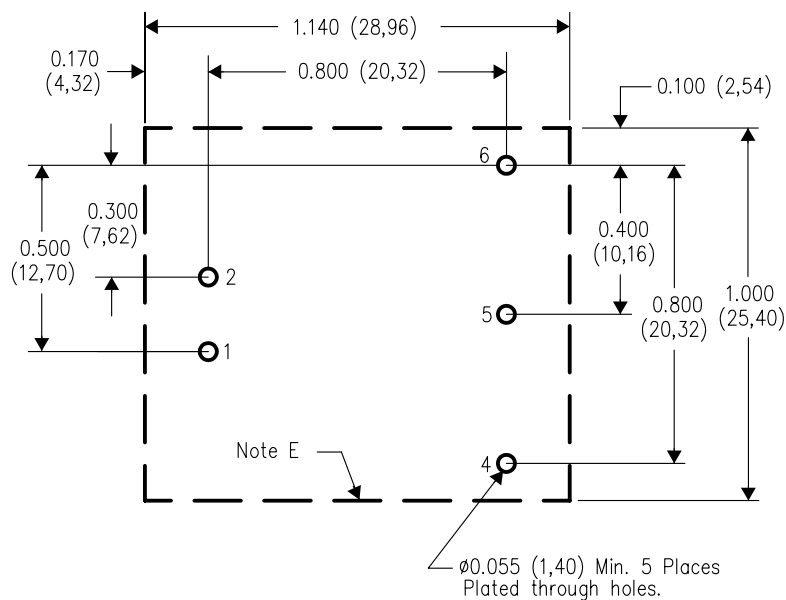

PC LAYOUT

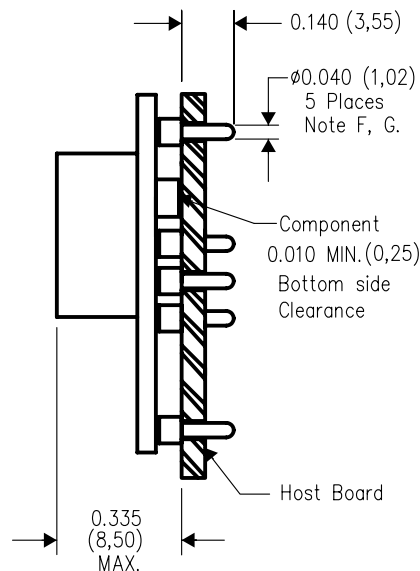

SIDE VIEW


4207709/A 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.


- Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate

## EET (R-PDSS-B6)


## DOUBLE SIDED MODULE

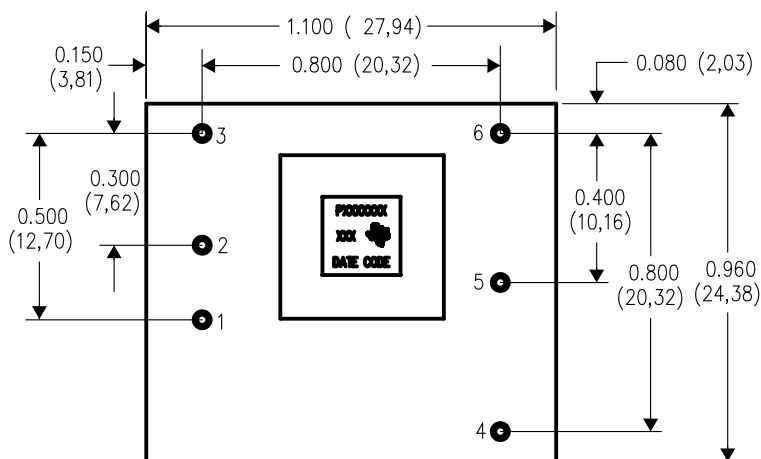


TOP VIEW

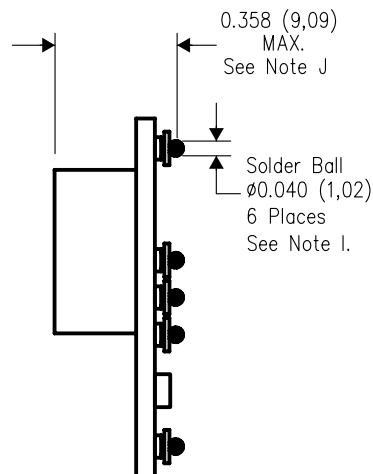

SIDE VIEW

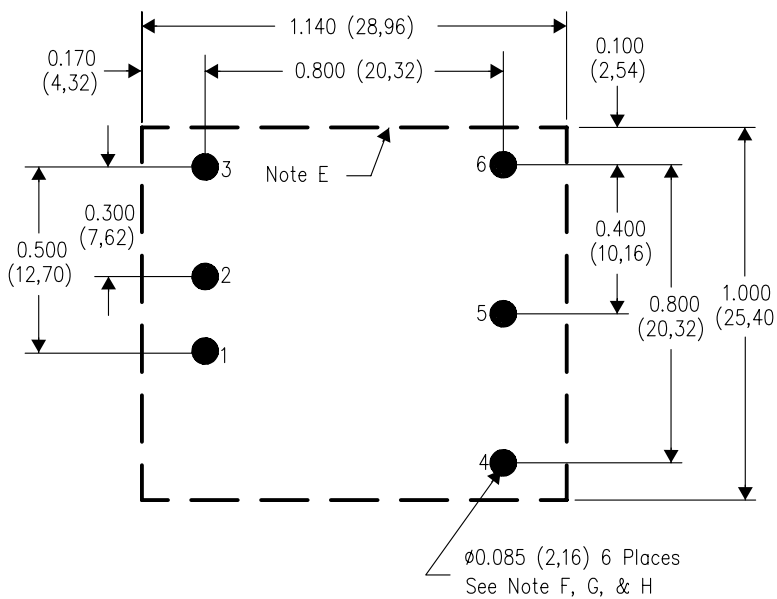

PC LAYOUT

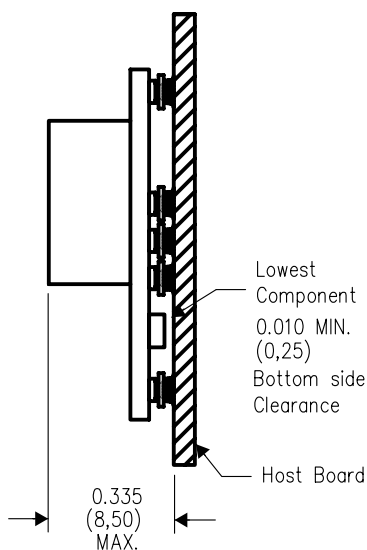

4207368-4/C 02/06

- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.
  - Power pin connection should utilize four or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).

- Paste screen opening: 0.080 (2,03) to 0.085 (2,16).  
Paste screen thickness: 0.006 (0,15).
- Pad type: Solder mask defined.
- All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate  
Solder Ball – See product data sheet.
- Dimension prior to reflow solder.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025