


InGaAs linear image sensor G9494-256D/-512D

Near infrared image sensor (0.9 to 1.7 μm) with high-speed data rate

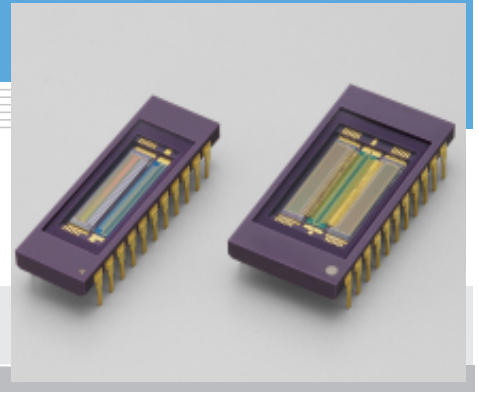

HAMAMATSU provides high-speed, near infrared image sensors designed for detectors used in on-line foreign object inspection equipment. These image sensors use square-shaped pixels that are ideally suited for software processing in pattern recognition systems.

The signal processing circuit employs CTIA (Capacitive Transfer Impedance Amplifier) method to perform simultaneous charge integration on all pixels, so there is no time lag among the pixel output signals.

Features

- High-speed data rate: 2 MHz Typ.
- Selectable conversion gain ($C_f=0.1 \text{ pF}$, 1 pF)
- Pixel size
G9494-256D: $50 \times 50 \mu\text{m}$
G9494-512D: $25 \times 25 \mu\text{m}$
- CMOS readout circuit incorporated
- Low dark current
- Room temperature operation

Applications

- Foreign object detection monitors
- Near infrared spectroscopy

■ Selection guide

Type No.	Cooling	Number of pixels	Pixel pitch (μm)	Pixel size [μm (H) $\times$ μm (V)]	Spectral response range (μm)	Defective pixel
G9494-256D	Non-cooled	256	50	50×50	0.9 to 1.7 (25 $^{\circ}\text{C}$)	Less than 1 %
G9494-512D		512	25	25×25		

■ Absolute maximum ratings

Parameter	Symbol	Value	Unit
Supply voltage	Vdd	-0.3 to +6	V
Clock pulse voltage	V ϕ	-0.3 to +6	V
Reset pulse voltage	V (RES)	-0.3 to +6	V
Gain selection terminal voltage	VcfSEL	-0.3 to +6	V
Operating temperature *1	Topr	-20 to +70	$^{\circ}\text{C}$
Storage temperature *1	Tstg	-20 to +85	$^{\circ}\text{C}$

*1: No condensation

■ Electrical characteristics (Ta=25 $^{\circ}\text{C}$)


Parameter		Symbol	Min.	Typ.	Max.	Unit
Supply voltage	G9494-256D	Vdd	4.5	5.0	5.5	V
	G9494-512D		4.5	5.0	5.5	
Supply voltage		Vref	-	1.26	-	V
Supply current	G9494-256D	Ivdd	-	40	75	mA
	G9494-512D		-	80	150	
Supply current		Ivref	-	-	1	mA
		IINP	-	-	1	mA
Ground		Vss	-	0	-	V
Element bias		INP	3.3	3.5	3.6	V
Clock frequency		f	0.1	2	4	MHz
Clock pulse voltage	High	Vφ	4.5	5.0	5.5	V
	Low		-	0	0.4	
Clock pulse rise / fall times		trφ, tfφ	0	20	100	ns
Clock pulse width		tpwφ	100	-	-	ns
Reset pulse voltage	High	V (RES)	4.5	5.0	5.5	V
	Low		-	0	0.4	
Reset pulse rise / fall times		tr (RES), tf (RES)	0	20	100	ns
Reset pulse width *2		tpw (RES)	6/f	-	-	μs
Video output voltage	High	VH	-	3.5	INP	V
	Low	VL	-	1.26	-	
Video output impedance		Zv	-	5	-	kΩ
A/D trigger voltage	Vtrig	High	-	Vdd	-	V
		Low	-	GND	-	
A/D trigger drive function		Vad	74HC244 1 ch	-	-	-
Data rate		fv	-	f	-	Hz

*2: 6 μs or more

■ Specification (Ta=25 °C, Vdd=5 V, INP=3.5 V, Vref=1.26 V, Cf=0.1 pF, f=2 MHz, integration time 200 μs, per 1 element)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Peak sensitivity wavelength	λ_p		-	1.55	-	μm
Saturation charge	Qsat	V ϕ =5 V	-	0.2	-	pC
Dark current	256 ch	ID	-	4	20	pA
	512 ch		-	1	5	
RMS noise voltage (readout noise)	N	Standard deviation Number of integration 50	-	900	2000	μV rms
Saturation voltage	Vsat		-	2	-	V
Photo response non uniformity	PRNU		-	±5	±20	%
Detective pixel	-		-	-	1	%

■ Equivalent circuit

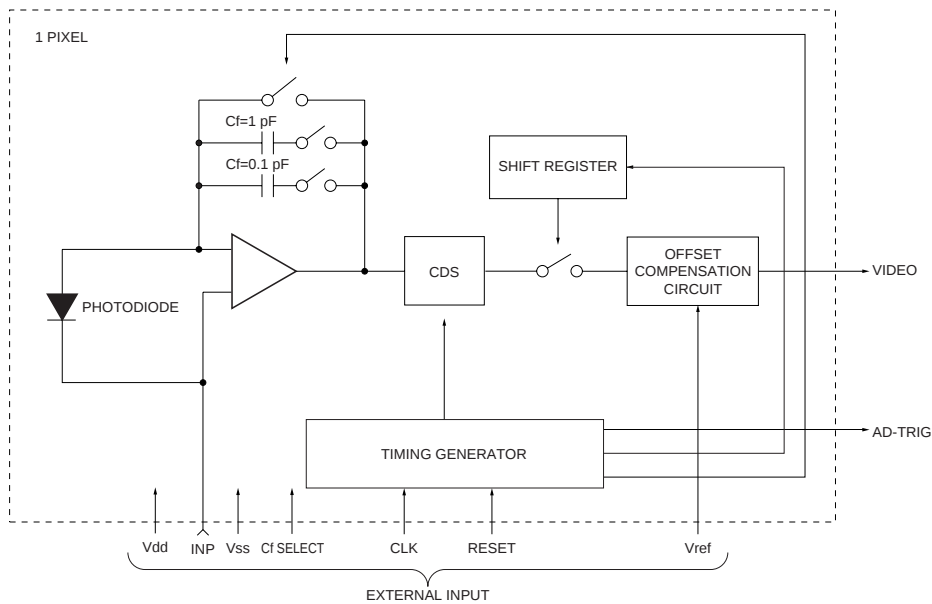


KMIRC0027EA

■ Basic circuit connection

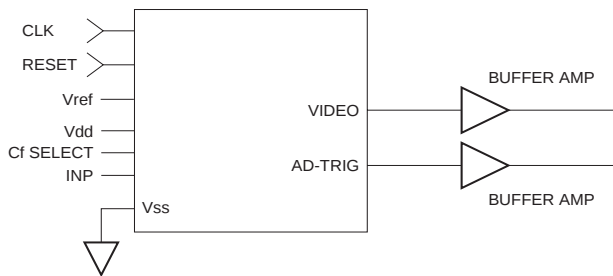

KMIRC0012EA

■ Timing chart

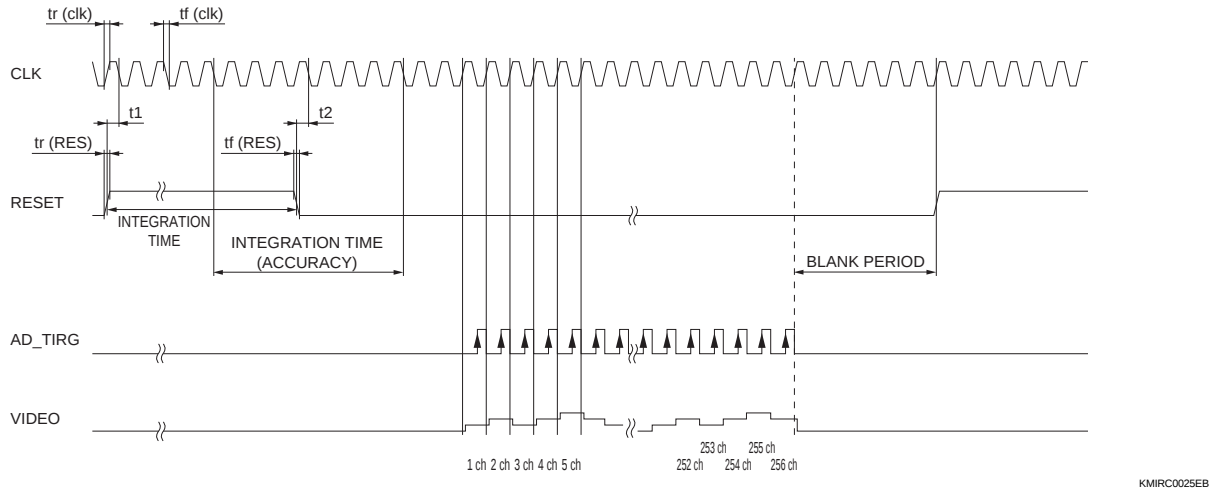


Note) More than 3 μs is required for a blank period from the last pixel to the rising edge of RESET pulse.

Parameter	Symbol	Min.	Typ.	Max.	Unit
Clock pulse frequency	-	0.1	2	4	MHz
Clock pulse width	tpw (clk)	100	-	-	ns
Clock pulse rise / fall times	tr (clk), tf (clk)	0	20	100	ns
Reset pulse width ^{*3}	tpw (RES)	6/f	-	-	μs
Reset pulse rise / fall times	tr (RES), tf (RES)	0	20	100	ns
Clock pulse to start pulse timing	t1, t2	50	-	-	ns
Video delay time	tvd	100	-	-	ns


*3: 6 μs or more

■ Spectral response

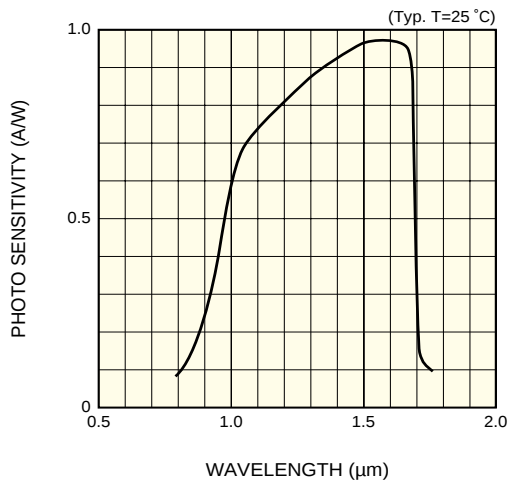


KMIRB0019EA

■ Photo sensitivity temperature characteristics

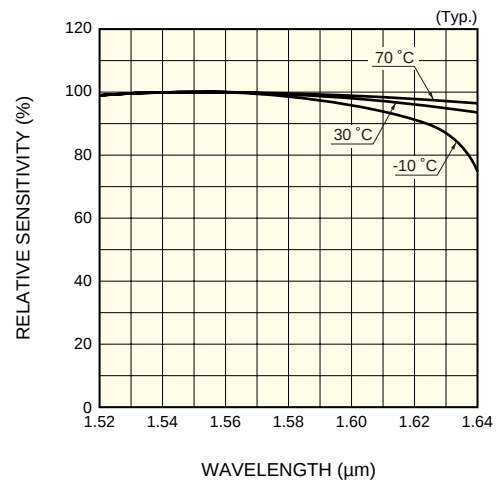


KMIRB0020EA

■ Noise vs. temperature

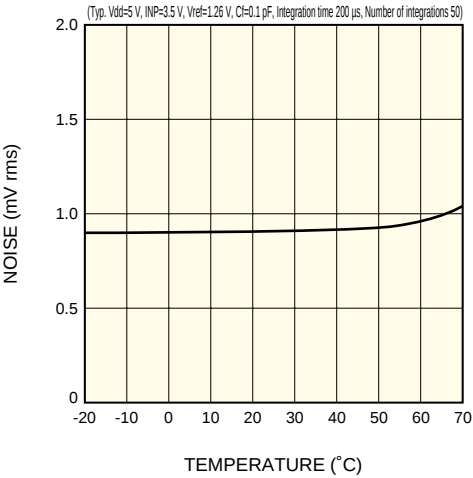

KMIRB0036EA


■ Dark current vs. temperature

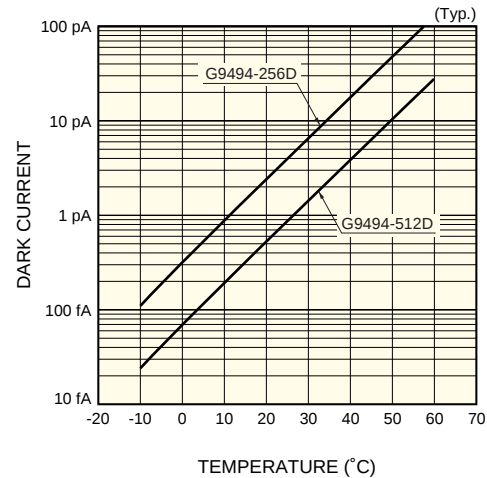

KMIRB0035EA

■ Dimensional outlines (unit: mm)


G9494-256D

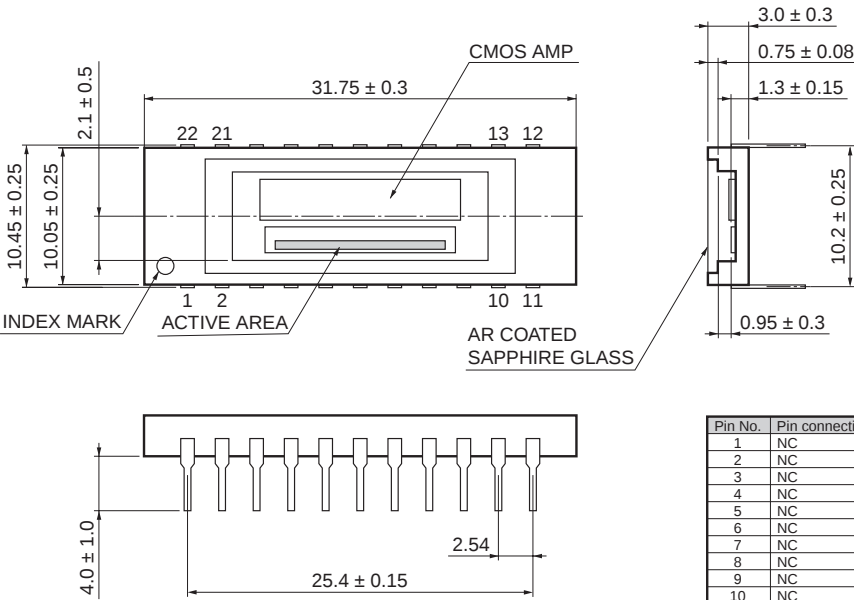

Pin No.	Pin connection	Pin No.	Pin connection
1	NC	12	VIDEO
2	NC	13	Vref
3	NC	14	CLK
4	NC	15	NC
5	NC	16	INP
6	NC	17	Vss
7	NC	18	Vdd
8	NC	19	NC
9	NC	20	AD-TRIG
10	NC	21	RESET
11	NC	22	CI-SELECT

KMIRA0015EA

G9494-512D

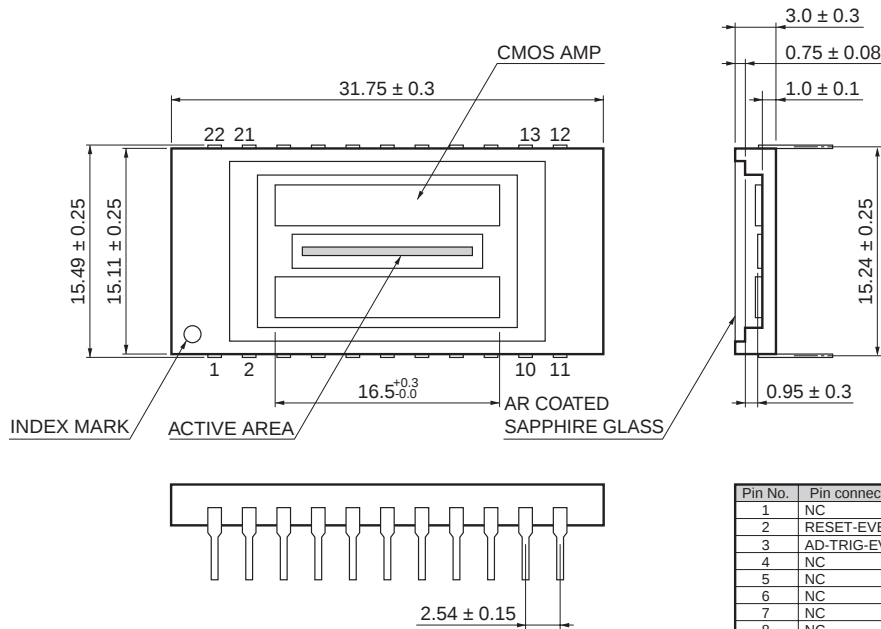

Pin No.	Pin connection	Pin No.	Pin connection
1	NC	12	VIDEO-ODD
2	RESET-EVEN	13	Vref
3	AD-TRIG-EVEN	14	CLK-ODD
4	NC	15	NC
5	NC	16	INP
6	NC	17	Vss
7	NC	18	Vdd
8	NC	19	NC
9	CLK-EVEN	20	AD-TRIG-ODD
10	NC	21	RESET-ODD
11	VIDEO-EVEN	22	Cf-SELECT

"-EVEN" FOR EVEN No. PIXELS,
"-ODD" FOR ODD No. PIXELS.

KMIRA0016EA

Pin connection

Terminal name	Input/Output	Function and recommended connection
CLK	Input (CMOS logic)	Clock pulse for operating the CMOS shift register
RESET	Input (CMOS logic)	Reset pulse for initializing the feedback capacitance in the charge amplifier formed on the CMOS chip. The width of the reset pulse determines integration time.
Vdd	Input	Supply voltage for operating the signal processing circuit on the CMOS chip
Vss	-	Ground for the signal processing circuit on the CMOS chip
INP	Input	Reset voltage for the charge amplifier array on the CMOS chip
Cf SELECT	Input	Voltage that determines the feedback capacitance (Cf) on the CMOS chip. Cf=0.1 pF at 0 V, and Cf=1 pF at 5 V
Vref	Input	Reset voltage for the offset compensation circuit at the CMOS chip
AD-TRIG	Output	Digital signal for AD conversion; positive polarity
VIDEO	Output	Analog video signal; positive polarity

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2007 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741