

# GPS Active Antenna Module - Magnet Base

APAMS-131

RoHS/RoHS II compliant  
Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



MSL level: Not Applicable

## ► FEATURES:

- High Reliability/ Sensitivity
- Compact Size
- Easy to install (magnet base)
- ROHS Compliant


## ► TYPICAL APPLICATIONS:

- Wireless Communications
- GSM
- GPRS
- CDMA
- UMTS
- Vehicle Monitoring

## ► STANDARD SPECIFICATIONS:

Parameters	Min.	Typ.	Max.	Units	Note
Frequency Range	890		960	MHz	(GSM900)
	1710		1880	MHz	(GSM1800)
Bandwidth		70		MHz	@900MHz
		170		MHz	@1800MHz
VSWR			2:1		
Polarization Model		Vertical			
Impedance		50		Ω	
Gain		2.5		dBi	@900MHz
		3.0		dBi	@1800MHz
Azimuth		Omni-Directional			
Operating Temperature	-40		+80	°C	
Storage Temperature	-45		+85	°C	

## ► OUTLINE DRAWING:

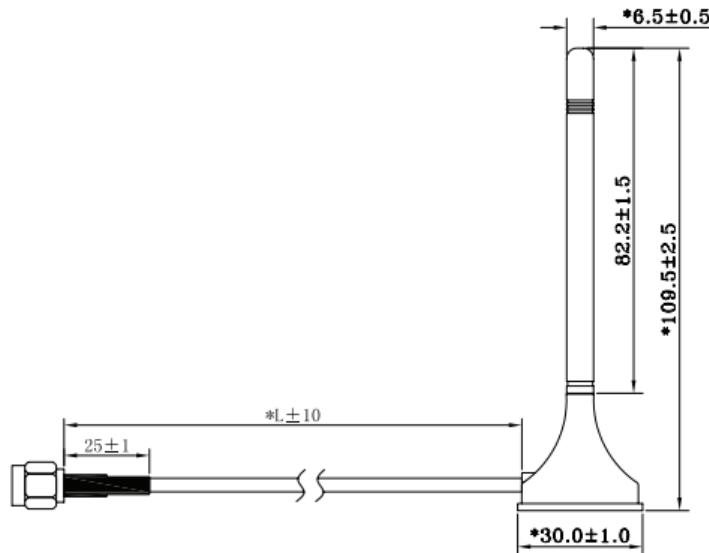

Parameters	Description
L (Cable Length)	250±10cm
Antenna Length	30x109.5mm
RF Cable	RG174
Base Diameter	30mm
Connector	SMA-J3
Color	Black
Mounting	Magnet Base

Unit: mm

# GPS Active Antenna Module - Magnet Base

APAMS-131

RoHS/RoHS II compliant  
Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)



## ► PRODUCT IMAGE:



## ► PACKAGING:

Each 400x32.5x180mm size carton includes 300 pieces of antenna.




### CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 10.30.14**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)