


## MECHANICAL DATA

Dimensions in mm

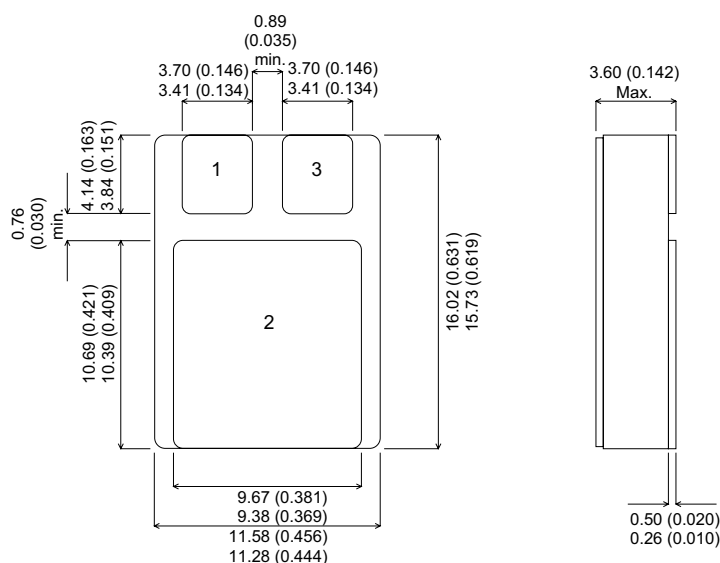

### SMD1

Pad 1 – Base      Pad 2 – Collector      Pad 3 – Emitter

## FEATURES

- LOW SATURATION VOLTAGE
- ULTRA FAST TURN-ON AND TURN-OFF SWITCHING ( $t_r / t_f = 40\text{ns}$ )

## APPLICATIONS

- High speed TO220 transistor suited for low voltage applications.
- High frequency and high efficiency converters, switching regulators and motor controls.
- Ideally suited for 12V and 24V inverters.

## ABSOLUTE MAXIMUM RATINGS ( $T_{\text{case}} = 25^\circ\text{C}$ unless otherwise stated)

|                  |                                                                 |                                |
|------------------|-----------------------------------------------------------------|--------------------------------|
| $V_{\text{CBO}}$ | Collector – Base Voltage                                        | 200V                           |
| $V_{\text{CEO}}$ | Collector – Emitter Voltage ( $I_B = 0$ )                       | 100V                           |
| $V_{\text{EBO}}$ | Emitter – Base Voltage ( $I_C = 0$ )                            | 7V                             |
| $I_C$            | Collector Current                                               | 14A                            |
| $I_B$            | Base Current                                                    | 4A                             |
| $P_{\text{tot}}$ | Total Dissipation at $T_{\text{case}} = 25^\circ\text{C}$       | 85W                            |
|                  | Derate above $25^\circ\text{C}$ when used on efficient heatsink | 4.8W/ $^\circ\text{C}$         |
| $T_{\text{stg}}$ | Storage Temperature Range                                       | $-65$ to $200^\circ\text{C}$   |
| $R_{\text{th}}$  | Thermal Resistance Junction – Case                              | $175^\circ\text{C} / \text{W}$ |

## ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25°C unless otherwise stated)

| Parameter                                                      | Test Conditions                                                                                   | Min. | Typ. | Max. | Unit |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------|------|------|------|
| ELECTRICAL CHARACTERISTICS                                     |                                                                                                   |      |      |      |      |
| V <sub>CEO(sus)</sub> * Collector – Emitter Sustaining Voltage | I <sub>C</sub> = 200mA                                                                            | 100  |      |      | V    |
| V <sub>(BR)EBO</sub> * Emitter – Base Breakdown Voltage        | I <sub>E</sub> = 1mA                                                                              | 7    |      |      |      |
| I <sub>CER</sub> * Collector Cut–Off Current                   | I <sub>B</sub> = 0<br>R <sub>BE</sub> = 50Ω<br>V <sub>CE</sub> = 200V<br>T <sub>C</sub> = 125°C   |      |      | 3    | mA   |
| I <sub>CBO</sub> * Collector – Base Cut–Off Current            | I <sub>E</sub> = 0<br>V <sub>CB</sub> = 200V<br>V <sub>BE</sub> = –1.5V<br>T <sub>C</sub> = 125°C |      |      | 1    | mA   |
| I <sub>EBO</sub> * Emitter Cut–Off Current                     | I <sub>C</sub> = 0<br>V <sub>EB</sub> = 5V                                                        |      |      | 1    | mA   |
| V <sub>CE(sat)</sub> * Collector – Emitter Saturation Voltage  | I <sub>C</sub> = 5A<br>I <sub>B</sub> = 500mA                                                     |      |      | 0.6  | V    |
|                                                                | I <sub>C</sub> = 10A<br>I <sub>B</sub> = 1A                                                       |      |      | 1.5  |      |
| V <sub>BE(sat)</sub> * Base – Emitter Saturation Voltage       | I <sub>C</sub> = 10A<br>I <sub>B</sub> = 1A                                                       |      |      | 2    | V    |
| SWITCHING CHARACTERISTICS (resistive load)                     |                                                                                                   |      |      |      |      |
| t <sub>on</sub> Turn–On Time                                   | V <sub>CC</sub> = 50V<br>I <sub>C</sub> = 12A                                                     |      | 0.2  | 0.6  | μS   |
| t <sub>s</sub> Storage Time                                    | V <sub>BE</sub> = –6V<br>I <sub>B1</sub> = 1.2A                                                   |      | 0.4  | 1    |      |
| t <sub>f</sub> Fall Time                                       | R <sub>BB</sub> = 2.5Ω                                                                            |      | 0.04 | 0.25 |      |
| SWITCHING CHARACTERISTICS (inductive load)                     |                                                                                                   |      |      |      |      |
| t <sub>s</sub> Storage Time                                    | V <sub>CC</sub> = 50V<br>I <sub>C</sub> = 12A                                                     |      | 0.5  |      | μS   |
| t <sub>f</sub> Fall Time                                       | V <sub>BE</sub> = –5V<br>I <sub>B1</sub> = 1.2A                                                   |      | 0.04 |      |      |
| t <sub>s</sub> Storage Time (T <sub>J</sub> = 125°C)           | L <sub>B</sub> = 0.5μH                                                                            |      |      | 2    |      |
| t <sub>f</sub> Fall Time (T <sub>J</sub> = 125°C)              |                                                                                                   |      |      | 0.15 |      |

\* Pulse test t<sub>p</sub> = 300μs , δ ≤ 2%